

WELCOME
TO FIRST CLASS

Sirius S.p.a., established in 1996, operates in the market sector of residential air ventilation and purification, in particular it produces cooker hoods for residential kitchens.

Quality, innovation, professional competence, technology and design are rolled into one with a clear and dynamic commercial policy that has permitted a rapid growth of the company, ensuring market penetration throughout the world.

Sirius has, in a short time, become a world leader in the sector of high quality decorative cooker hoods, encompassing a wide product range and exporting 90% of its production.

The strategic choices accomplished in the technical productivity sectors, dictated by many years of experience, have been of fundamental importance for the growth and success of the company.

A wide range of products, different technological possibilities and innovation, functionality of the components used, such as the motors, and different ventilation components represent a combination between design and functionality.

This gives the clients a wide choice, to meet all of their ventilation needs. Our company's philosophy, innovative in the market of residential kitchen ventilation, aims to maintain and improve the high quality standards of our production in style, technology and design, which are synthesized by the realization of modular and innovative ventilation systems.





DESIGN & TECHNOLOGY



MANAGE YOUR RANGE HOOD WITH YOUR SMARTPHONE THROUGH SIRIUS APP

Interact and control your range hood, in a fast and efficient manner, even remotely.

Our new technology replaces and widens the functionalities of traditional controls.

Easy and intuitive to use, it allows adjusting lighting and suction power and, in some specific models, it can even monitor and detect air quality.

Sirius App sets up automatically according to the technical and functional specifications of the purchased model.

Its technology alerts the user if a maintenance action is required (e.g. replacement of filters).




MANAGE YOUR RANGE HOOD THROUGH THE VOCAL ASSISTANTS GOOGLE HOME OR ALEXA

Turn your range hood on and select the suction speed, then think only about the pleasure of cooking.

Manage the lighting, choose the color temperature you prefer, from hot to cold light, increase or reduce its intensity.





The latest generation LEDs in our range hoods allow to manage light intensity by increasing or decreasing its power and choose colour temperature from warm to cold light (from 2700°K to 6500°K), thus adapting hood lighting to the light of your domestic environment.

The lighting surface in our lighting system is perfectly homogeneous since there are no overshadows.





BRUSHLESS **motors**

High suction efficiency

Using a brushless motor allows to lower the consumption (kw/h) by 85% when the appliance is used in the low – medium speeds and by 35% in high speeds.


Quietness

This is the quietest motor in the market and its performances remain stable in any given use condition, even with complicated installations.

Longer life of the product



ENERGY SAVING



HIGH EFFICIENCY **carbon filter**

High efficiency carbon filters allow a higher filtering efficiency compared to standard carbon grain filters. These filters are made of a mold of foam in polyurethane, having activated carbon spheres in it and allowing high permeability of the air compared to normal carbon grain filters. At the same time, they allow the highest absorption of smells thanks to their top quality activated carbon.

The advantages of using a high efficiency carbon filter, instead of a typical carbon filter, are:

Higher filtering efficiency

Smaller losses during air filtration

Long lasting

To restore / regenerate high efficiency and washable filters it is necessary to wash them in the dishwasher and then put them for 1 hour into the oven at max 90°C.

EFFICIENCY is measured by the absorption capacity of the filter related to its weight. If the filter weight is 100g, an efficiency of 98.8 means that it can absorb 98.8g of greases.

LIFESPAN we took into account a standard use of 1 hour/day at medium speed level.




ARTIFICIAL INTELLIGENCE SYSTEM - AIS

This innovative system, patented by Sirius, is made up of sensors and technologically advanced electronic devices working in synergy.

As you start cooking, the range hood autonomously activates and adjusts the suction power, by detecting constantly both the temperature and air quality while cooking.

This innovative technology allows an autonomous and automatic operation of products and is completely independent from the kind of hob you use (gas, induction, etc.).

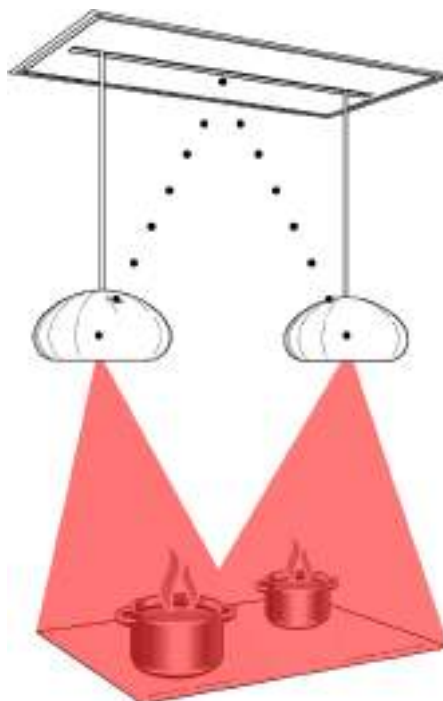

BI-POWER TECHNOLOGY

Sirius bi-power technology allows to get a high energy saving and a higher product efficiency, especially in range hoods in filtering version or range hoods installed in ducting version with ducts having diameters less than 150 mm.

The range hood is equipped with a 800 m³/h fan. Through this innovative technology and touch control, you can set the parameters of power capacity (m³/h), absorption (W) and noise level (dBA).

This means an improvement in terms of efficiency thanks to an airflow suitable for the application (filtering or ducts having diameters less than 150 mm), an energy saving of about 35% and a noise level reduction of about 12%.



ENERGY
CONSUMPTION 35 %



NOISE LEVEL
REDUCTION -12 %




ANTI-DROP SYSTEM



This is an innovative anti-condensation system, based on thermal resistances inside the glass panels or the stainless steel panels. By heating the surface in contact with the vapours coming from the induction hob, this system does not allow condensation or water drops to develop and fall on the hob.

Sirius range hood is equipped with an **air purification system** inside the upper chimney. This system is made up of an air quality sensor, 2 ionizers and a valve activated by a micromotor, allowing to exhaust fumes outside (ducting version) or towards charcoal filters and side ionizers (filtering version).

Smart Air Management System

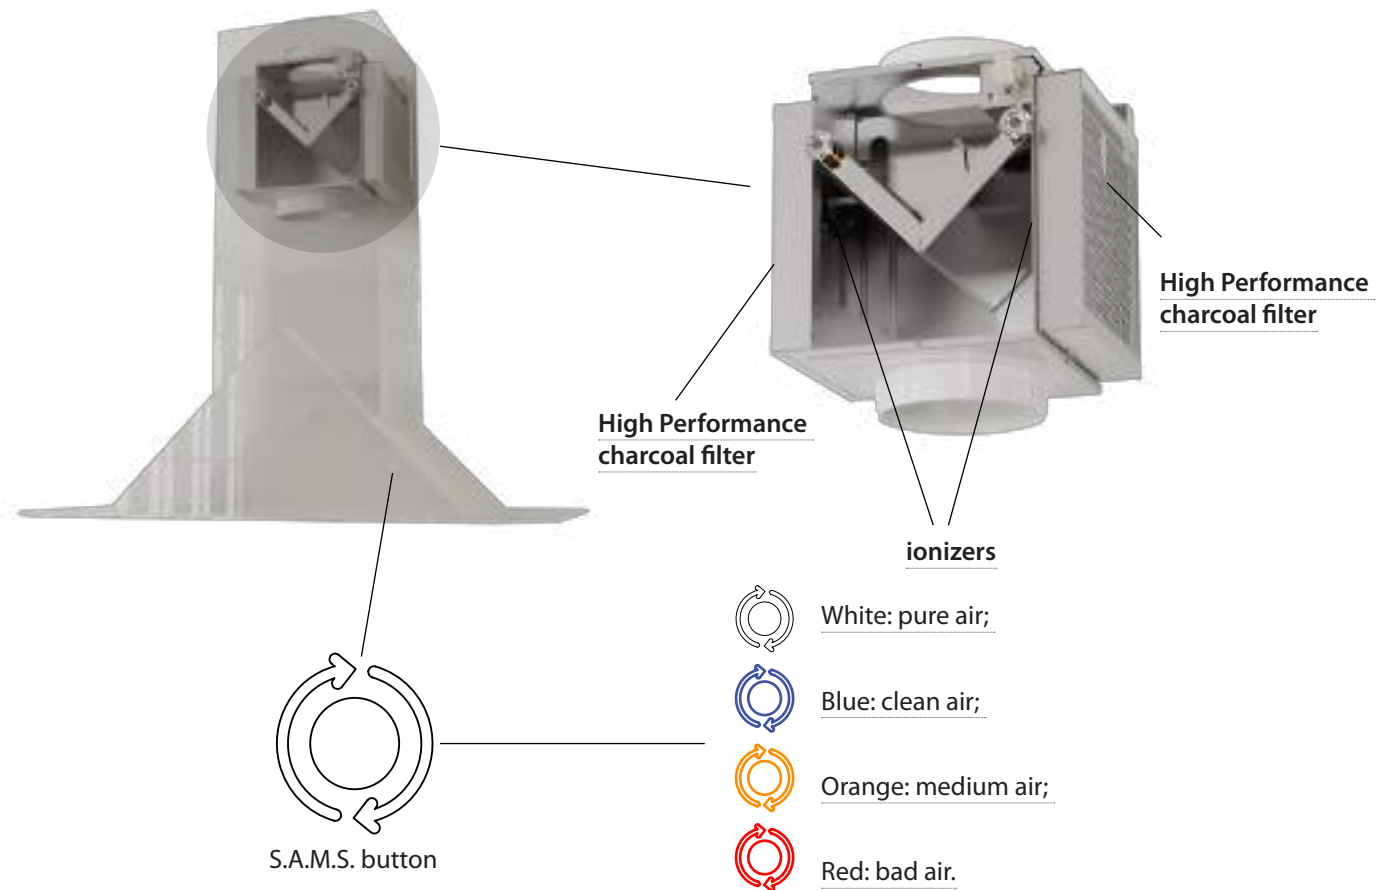


This range hood is equipped with a new Touch control having a S.A.M.S. button, indicating always the air quality through the color variation:

White: clean air; Blue: good air; Orange: medium air; Red: bad air.

By pressing the button "S.A.M.S.", you can change the version of the hood from ducting (open valve and air exhausted outside) to filtering and purifying (closed valve; fumes go out through the side grills of the chimney; the air returns to the kitchen once filtered and purified thanks to high efficiency charcoal filters and ionizers).

The **Smart Air Management System** is usually set in ducting version (Fig.1). The valve is open and fumes go outside through a ducting system. After installation, the product works as a standard range hood, with a white colour rear-lighted touch control.

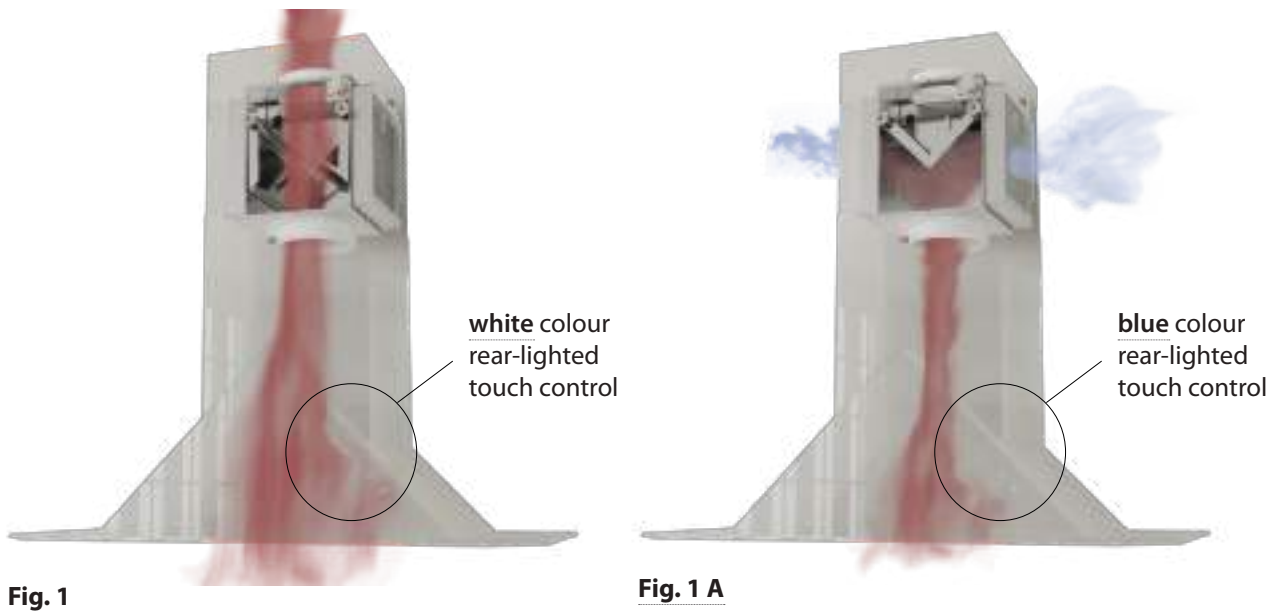

After or while cooking, if the button (S.A.M.S.) highlights a bad air quality, you can activate the Smart Air Management system by pressing this button (Fig.1A). The backlight of the touch control changes from white to blue colour. The valve closes, the ionizers start functioning and the air returns to the kitchen through the chimney side grills.

The process of filtration and air purification takes place through 2 High Performance charcoal filters and 2 ionizers. You can keep on using all the product functions as usual (change in speed, lights, etc). You can activate this new system even when the product is switched off, in case of bad quality air.

By pressing the button "S.A.M.S.", the range hood sets in filtering mode with motor at 1st speed. You can permanently set the Smart Air Management function during installation. You just have to hold down the button "S.A.M.S" for at least 3 seconds in order to set the product in ducting or filtering version.





THE PASSION OF CONCEIVING AND FINDING INNOVATIVE DESIGN SOLUTIONS

The aesthetics of the products and the corporate image are entrusted with the architect Giacomo Fava, who explains Sirius philosophy this way:

"Our mission is to imagine products that connect with the end user on an emotional and functional level.

The creative approach entails a deep analysis of materials, technologies and human behaviors, with the aim to create objects that are simple, beautiful, clear, easy to use and long - lasting: objects with which you can fall in love.

At the core of every single project there is a long work, that sees the tight cooperation and synergy between the company and all the entities involved in the production process, to create a good product which is introduced in the market at the right moment".



INDEX

CERAMIC HANDMADE



GEORGIE / P. 23



ICON / P. 25



DUNE / P. 26



DERUTA / P. 28



HIVE / P. 30



LINK / P. 32

DOWNDRAFT



STONE / P. 36



BALANCE / P. 38



SUNRISE / P. 40



MIDDLE / P. 42



PUSH UP / P. 44



SDD2 LTC / P. 46



SDD2 L / P. 48

INSTALLATION
SCHEMES
DOWNDRAFT
P. 50

CEILING HOODS



INSIDE OUT / **P. 61**



SUPERNOVA / **P. 62**
SUPERNOVA AUTOMATIC **P. 65**



SUPERNOVA LAMP / **P. 67**



KITE LIGHT / **P. 70**



KITE / **P.73**



LINE / **P. 74**



HALO LIGHT / **P. 79**



HALO / **P. 81**




SCREEN / **P. 83**



FRAME / **P. 84**



LESS / **P. 86**

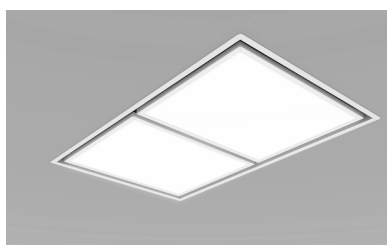

ZENDRA / **P. 88**



SLT 958 / **P. 90**



S-DF4 FILTERING KIT / **P. 92**



INDEX

DECORATIVE ISLAND



NEMESI / **P. 97**



SYMPHONY / **P. 101**



MELODY / **P. 103**



ROLL / **P. 106**



SIL 24 TC / **P. 108**



SIL 24 / **P. 109**



MO 407 / **P. 110**



MO 408 / **P. 111**

WALL HOODS



ARROW / **P. 115**



FLAT / **P. 116**



FLAT ANTIDROP / **P. 118**



SLTC 119 / **P. 120**



SKINNY / **P. 122**



JEEG / **P. 124**



SL TC 122 / **P. 126**



SL TC 92 / **P. 128**



SL 92 / **P. 129**



SL 107 / **P.130**



SL TC 107 / **P.131**



SL 90 TC / **P.132**



SL 91 TC / **P.133**



SL109 / **P. 134**



MO 209 / **P. 135**



MO 210 / **P. 136**



INDEX

BUILT-IN PRODUCTS



SUPERHERO / **P. 140**



WING / **P. 142**



SL 906 L / **P. 144**



SL 909 / **P. 145**



SLTC 928 / **P. 146**



SL 927 ANTIDROP / **P.148**



SM 927 / **P.149**



SL 913 / **P.150**



SL 903 P / **P. 151**



SM 923-L / **P.152**



SM-SL 900 / **P. 153**



SL 907 / **P. 154**

VENTED INDUCTION HOBS



DNA / **P. 158**



SYNTHESIS 78 CM / **P. 161**



SYNTHESIS 60 CM / **P. 163**



SENSE / **P. 164**



SHADOW / **P. 166**



SDDH1 / **P. 168**

INSTALLATION SCHEMES

VENTED INDUCTION HOB

P. 170



AEOLUS / **P. 177**

REMOTE MOTORS / **P. 174**

INDUCTION HOBS / **P. 180**

ACCESSORIES / **P.186**

ENERGY DATA LABEL / **P. 187**





CERAMIC HANDMADE

Handmade in Deruta is a collection of cooker hoods designed by Giacomo Fava and realized in cooperation with the master craftsmen of Deruta. Every single piece is entirely handcrafted from ceramic masters of the Umbrian town, renowned in the whole world for exquisite ceramic handcrafting. Unique creations stem from the simple mixture of water and clay, modeled by the hands of the craftsman – artist. Processing times are slow and require many delicate steps in order to perfect the finish product by hand.



Motor on board

Lighting:

2X3,75W Dimmable and dynamic Led bar
(2700 to 6500°K)

Control panel:

Chromed 4 speeds push-button+light
switch+timer

Grease filter:

Black painted Anodized aluminum (5+1
layers)

Washable carbon filter KF61

Material:

Black matt painted stainless steel

Handmade glazed ceramic

Finishing:

White

Beige

Green

Antique pink

Filtering version only

GEORGIE SL 123







ICON SILT 35

Motor on board:

600 m3/h

230W

63dBA

Lighting:

Dimmable and dynamic round Led 6W
(2700 to 6500°K)

Control panel:

Remote control

Filter:

Stainless Steel and anodized aluminum
Washable carbon filter KF31


Material:

Handmade ceramic


Finishing:

White/Black matt

Filtering version only

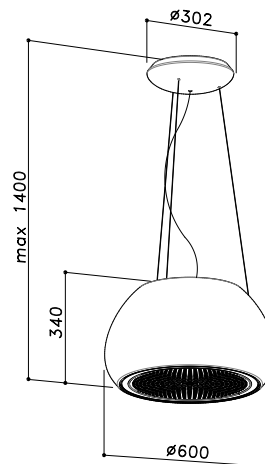

DUNE SL116

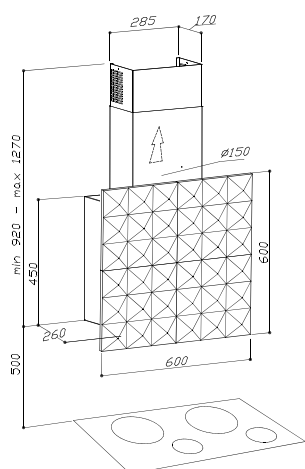

Motor on board:

Top or back vented

Lighting:

3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Chromed 4 speeds push-button+light switch+timer

Filter:

Anodized aluminum (5+1 layers)

Material:

Stainless Steel, handmade ceramic


Finishing:

Matt black or matt white painted front panel

product	dim.	motor	model identifier	EEC
SL116	600	on-board	P116060PB1364022	A



DERUTA SILT 26

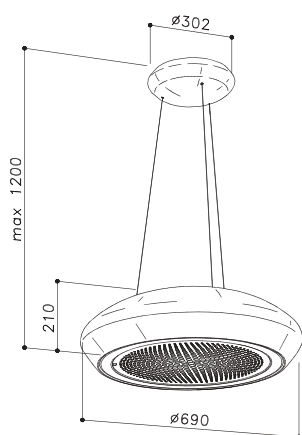

Motor on board:

550 m3/h

110W

68dBA

Lighting:

Dimmable and dynamic round Led 7,5W
(2700 to 6500°K)

Control panel:

Remote control

Filter:

Stainless Steel and anodized aluminum
Washable carbon filter KF38

Material:

Handmade ceramic


Finishing:

Gold/Copper/White

Only filtering version



HIVE SILT 27

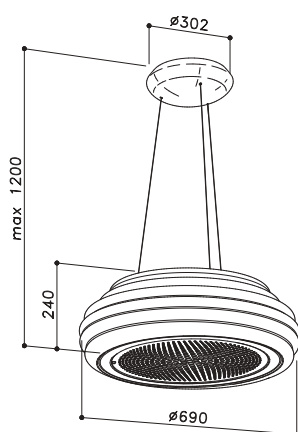

Motor on board:

550 m3/h

110 W

68 dBA

Lighting:

Dimmable and dynamic round Led 7,5W
(2700 to 6500°K)

Control panel:

Remote control

Grease filter:

Stainless Steel and anodized aluminum

Washable carbon filter KF38

Material:

Handmade ceramic


Finishing:

Copper/White

Filtering version only



LINK SLT 106

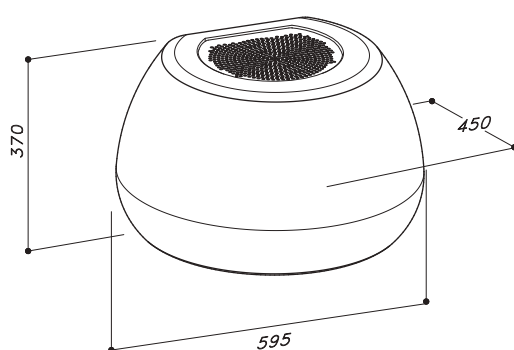

Motor on board:

600 m3/h

230W

65dBA

Lighting:

3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Remote control

Grease filter:

Stainless Steel and anodized aluminum

Washable carbon filter KF40

Material:

Handmade ceramic

Finishing:

Gold/Copper/Matt Black/White







DOWNDRAFT

Downdraft rangehoods that offer maximum extraction efficiency with the advantage of a mobile solution that hides the appliance inside the kitchen worktop once use is finished. Sirius, pioneer in the Downdraft sector since 2005, offers a wide range of them, studying different shape, color and technology models, such as to be able to meet different design and functioning needs.

STONE

Motor:

available with motor on board or external motor
(to be purchased separately)

Lighting:

1x5W Led strip (835mm version)
1x9W Led strip (1135mm version)

Control:

Touch control 4 speeds+timer+light
Remote control

Filter:

Anodized aluminum (4+1 layers)

Material:

Stainless steel AISI304

Stone allows to customise the cover with the same material of the worktop, thus obtaining a flush top effect


product	dim.	motor	model identifier	EEC
STONE	835	on-board	D002088PB1282415	A
STONE EM	835	SEM1	D002088PB1292415	B
STONE EM	835	SEM2	D002088PB1152415	C
STONE EM	835	SEM8	D002088PB1172415	C
STONE EM	835	SEM10	D002088PB1302415	C
STONE EM	835	SEM12	D002088PB1312415	A
STONE	1135	on-board	D002118PB1282717	A
STONE EM	1135	SEM1	D002118PB1292717	A
STONE EM	1135	SEM2	D002118PB1152717	C
STONE EM	1135	SEM8	D002118PB1172717	B
STONE EM	1135	SEM10	D002118PB1302717	C

Cut out:


Create a niche in the countertop using the following dimensions

100x837mm (835mm version)
100x1137mm (1135mm version)

Anti-crushing safety system

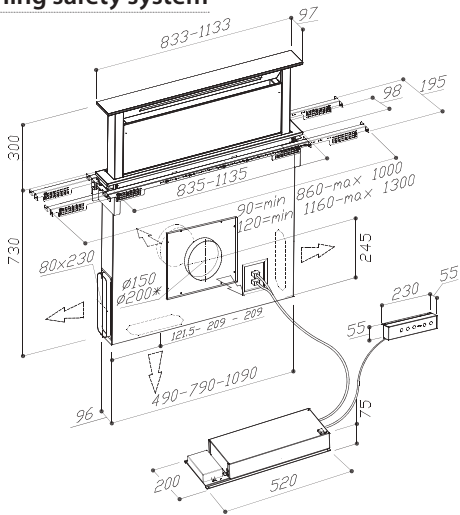

external motor

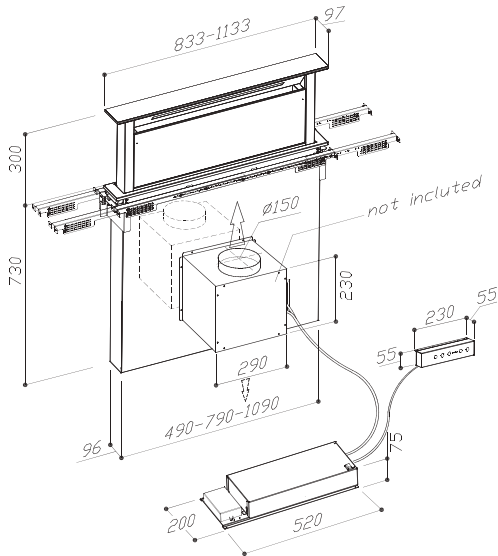

motor on board



BALANCE S DD 18



Motor:

available with motor on board or external motor
(to be purchased separately)

Lighting:

Led strip 5W

Control panel:

Touch control 4 speeds+light switch+timer

Filter:

Aluminum anodized (5+1 layers) with integrated
oil collector

Material:

Polished stainless steel and glass

Finishing:


Black

White


Anti-crushing safety system

Cut out:

Create a niche in the countertop using the
following dimensions:
108x826 mm

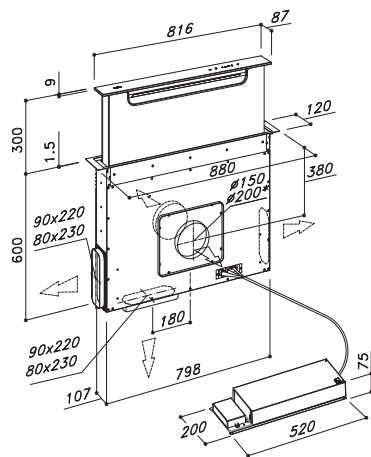

external motor

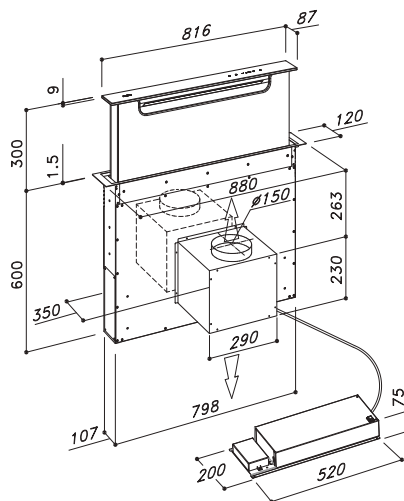

motor on board



filter with oil collector

product	dim. motor	model identifier	EEC
S-DD18	880 on-board	D018088TC1282472	A
S-DD18 EM	880 SEM1	D018088TC1292472	A
S-DD18 EM	880 SEM2	D018088TC1152472	C
S-DD18 EM	880 SEM8	D018088TC1172472	B
S-DD18 EM	880 SEM10	D018088TC1302472	B
BRH S-DD18 EM	880 SEM12	D018088TC1312472	A



SUNRISE S DD 13

Motor:

available with motor on board or external motor
(to be purchased separately)

Lighting:

led strip 9,5W

Control panel:

Remote control 4 speeds+light switch+timer

Filter:

Polished stainless steel and anodized aluminum
filter

Material:

Stainless Steel/Aluminum/Glass


Finishing:

Black


Cut out:

Create a niche in the countertop using the
following dimensions:
115x850mm

Anti-crushing safety system

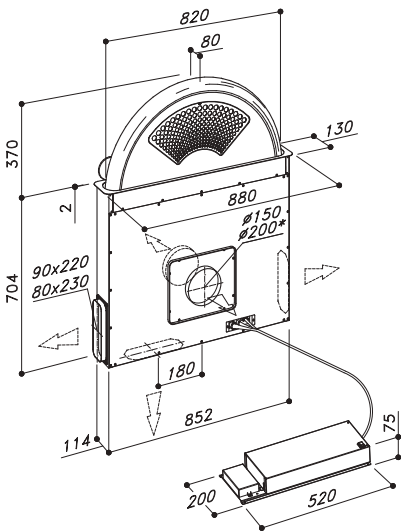

external motor

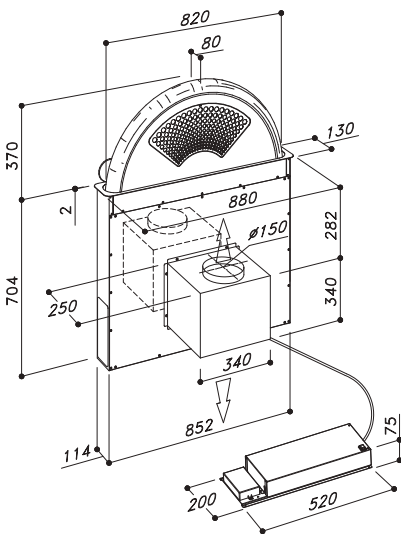

motor on board

product	dim. motor	model identifier	EEC
S-DD13	880 on-board	D013088TC1283163	A
S-DD13 EM	880 SEM1	D013088TC1293163	A
S-DD13 EM	880 SEM2	D013088TC1153163	B
S-DD13 EM	880 SEM8	D013088TC1173163	C
S-DD13 EM	880 SEM10	D013088TC1303163	C



MIDDLE S DD 20



Thickness perfect to match domino hobs (4mm for glass, 1mm for inox)

Motor:

Motor on board (Brushless)

Control panel:

Touch control 4 speeds+timer

Filter:

Anodized aluminum

Material:

Stainless steel and glass



Finishing:

Black ceramic glass frame and black ceramic glass panel

Stainless steel frame and stainless steel panel

Cut out:

RECTANGULAR OPENING: 490mm x (according to the sizes of the hobs)

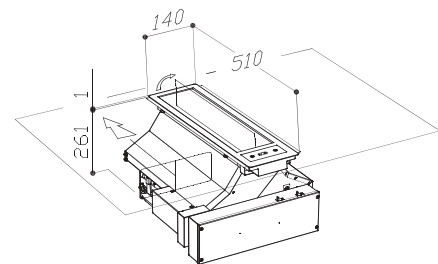

Anti-crushing safety system

product

S-DD20 INOX BRHM

S-DD20 GLASS BRHM

motor

on board D020052TC135XX74

on board D020052TC135XX74

model identifier

EEC

A++

A++



PUSH UP S DD 11



Motor:

available with motor on board or external motor
(to be purchased separately)

Lighting:

2x3,9W Strip Led

Control:

4 speeds push-button+light switch+timer

Filter:

Polished stainless steel and anodized aluminum

Material:

Stainless Steel and glass


Finishing:

Black


White

Cut out:

Create a niche using the following dimensions:
100x790 mm

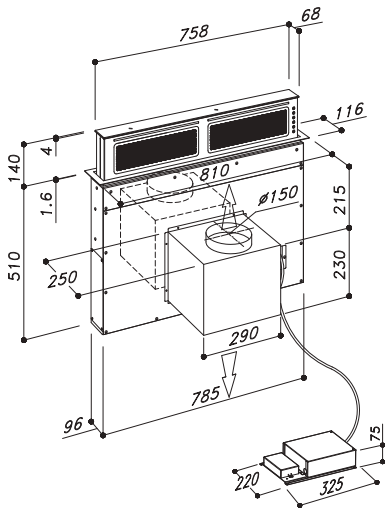

motor on board

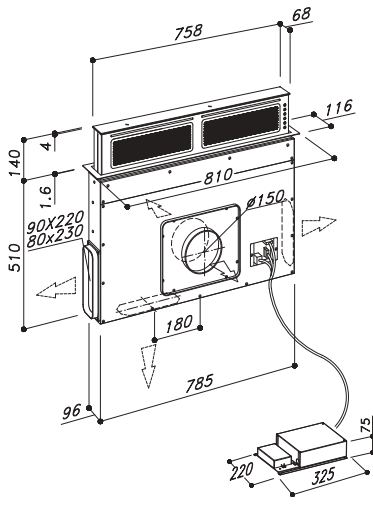

external motor

product	dim. motor	model identifier	EEC
S-DD11 X	810 on-board	D011088PB1282219	B
S-DD11 EM X	810 SEM1	D011088PB1292219	B
S-DD11 EM X	810 SEM2	D011088PB1152219	C
S-DD11 EM X	810 SEM10	D011088PB1302219	C
BRH S-DD11 EM X	810 SEM12	D011088PB1312219	C



S DD 2 L TC



Motor:

available with motor on board or external motor
(to be purchased separately)

Lighting:

1x6,5W Led strip (S-DD2-L 575mm version)

1x5W Led strip (S-DD2-L 875mm version)

1x9W Led strip (S-DD2-L 1175mm version)

Control panel:

Touch control 4 speeds+light switch+timer

Grease filter:

Anodized aluminum (4+1 layers)

Material:

Stainless steel AISI304 and glass

Cut out:


Create a niche in the countertop using the following dimensions

100x542 mm (S-DD2-L 575mm)


100x842 mm (S-DD2-L 875mm)

100x1142 mm (S-DD2-L 1175mm)

Anti-crushing safety system

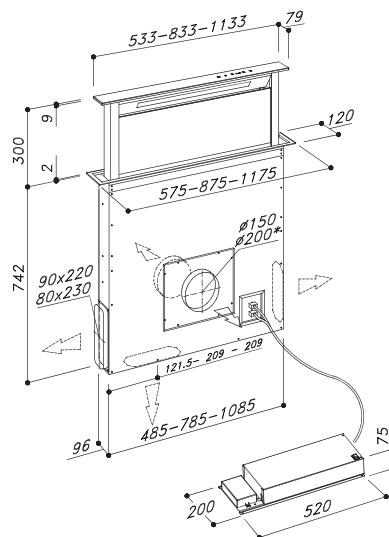

external motor

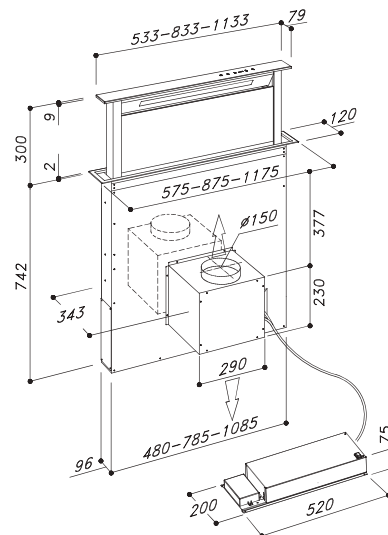

motor on board



product	dim.	motor	model identifier	EEC
SDD2 - L EM 580 TC (LED)	575	on-board	D002058TC1280116	B
SDD2 - L EM 580 TC (LED)	575	SEM1	D002058TC1290116	B
SDD2 - L EM 580 TC (LED)	575	SEM2	D002058TC1150116	C
SDD2 - L EM 580 TC (LED)	575	SEM8	D002058TC1170116	C
SDD2 - L EM 580 TC (LED)	575	SEM10	D002058TC1300116	C
SDD2 - L 880 (LED) TC	875	on-board	D002088TC1282415	A
SDD2-EM-L 880 (LED) TC	875	SEM1	D002088TC1292415	B
SDD2-EM-L 880 (LED) TC	875	SEM2	D002088TC1152415	C
SDD2-EM-L 880 (LED) TC	875	SEM7 Ø150	D002088TC1162415	A+
SDD2-EM-L 880 (LED) TC	875	SEM7 Ø200	D002088TC1162415	A+
SSDD2-EM-L 880 (LED) TC	875	SEM8	D002088TC1172415	C
SDD2-EM-L 880 (LED) TC	875	SEM10	D002088TC1302415	C
SDD2-EM-L 880 (LED) TC	875	SEM12	D002088TC1312415	A
SDD2-L EM 1200 (LED) TC	1175	on-board	D002118TC1282717	A
SDD2-L EM 1200 (LED) TC	1175	SEM1	D002118TC1292717	A
SDD2-L EM 1200 (LED) TC	1175	SEM2	D002118TC1152717	C
SDD2-L EM 1200 (LED) TC	1175	SEM8	D002118TC1172717	B
SDD2-L EM 1200 (LED) TC	1175	SEM10	D002118TC1302717	C

S DD 2 L / INOX



Motor:

available with motor on board or external motor
(to be purchased separately)

Lighting:

1x6,5W Led strip (S-DD2-L 575mm version)

1x5W Led strip (S-DD2-L 875mm version)

1x9W Led strip (S-DD2-L 1175mm version)

Control panel:

Touch control 4 speeds + light switch + timer

Grease filter:

Anodized aluminum (4+1 layers)

Material:

Stainless steel AISI304

Anti-crushing safety system


Cut out:

Create a niche in the countertop using the following dimensions


100x542 mm (S-DD2L 575 mm)

100x842 mm (S-DD2L 875 mm)

100x1142 mm (S-DD2L 1175 mm)

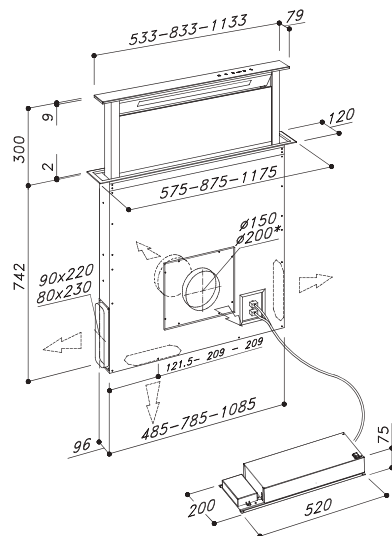

external motor

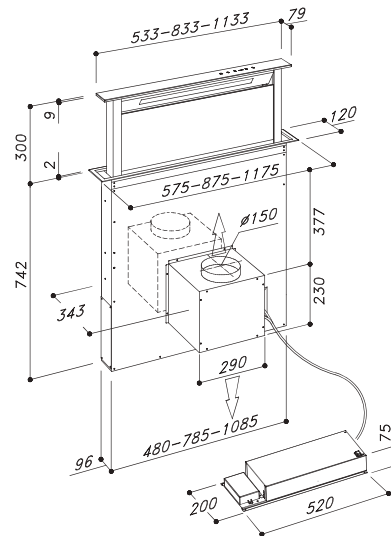

motor on board






product	dim.	motor	model identifier	EEC
SDD2 - L 580 X (LED)	575	on-board	D002058PB1280116	B
SDD2 - L EM 580 X (LED)	575	SEM1	D002058PB1290116	B
SDD2 - L EM 580 X (LED)	575	SEM2	D002058PB1150116	C
SDD2 - L EM 580 X (LED)	575	SEM8	D002058PB1170116	C
SDD2 - L EM 580 X (LED)	575	SEM10	D002058PB1300116	C
SDD2 - L 880 (LED) X	875	on-board	D002088PB1282415	A
SDD2-EM-L 880 (LED) X	875	SEM1	D002088PB1292415	B
SDD2-EM-L 880 (LED) X	875	SEM2	D002088PB1152415	C
SDD2-EM-L 880 (LED) X	875	SEM7 Ø150	D002088PB1162415	A+
SDD2-EM-L 880 (LED) X	875	SEM7 Ø200	D002088PB1162415	A+
SDD2-EM-L 880 (LED) X	875	SEM8	D002088PB1172415	C
SDD2-EM-L 880 (LED) X	875	SEM10	D002088PB1302415	C
SDD2-EM-L 880 (LED) X	875	SEM12	D002088PB1312415	A
SDD2-L 1200 (LED) X	1175	on-board	D002118PB1282717	A
SDD2-L EM 1200 (LED) X	1175	SEM1	D002118PB1292717	A
SDD2-L EM 1200 (LED) X	1175	SEM2	D002118PB1152717	C
SDD2-L EM 1200 (LED) X	1175	SEM8	D002118PB1172717	B
SDD2-L EM 1200 (LED) X	1175	SEM10	D002118PB1302717	C


INSTALLATION SCHEMES




S-DD2 L STONE WITH SEM10
S-DD2 L STONE WITH SEM12

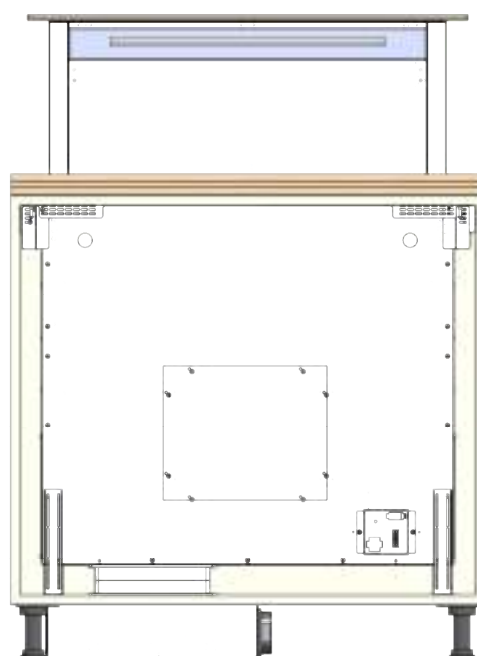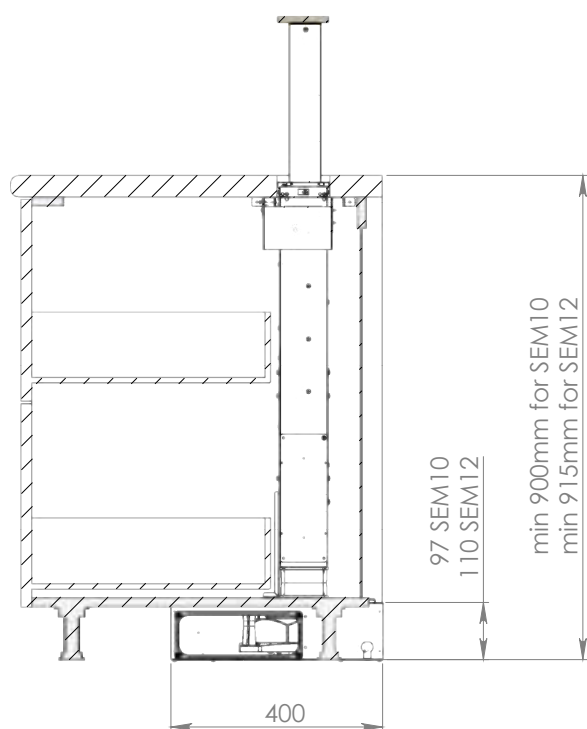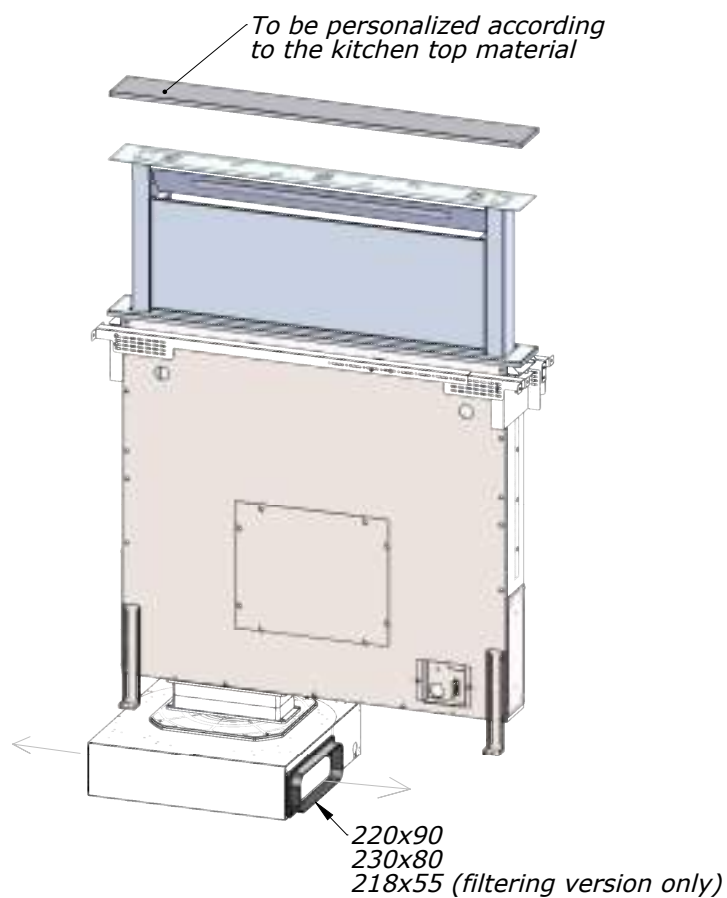


BALANCE SDD18 WITH SEM 10 - SEM 12

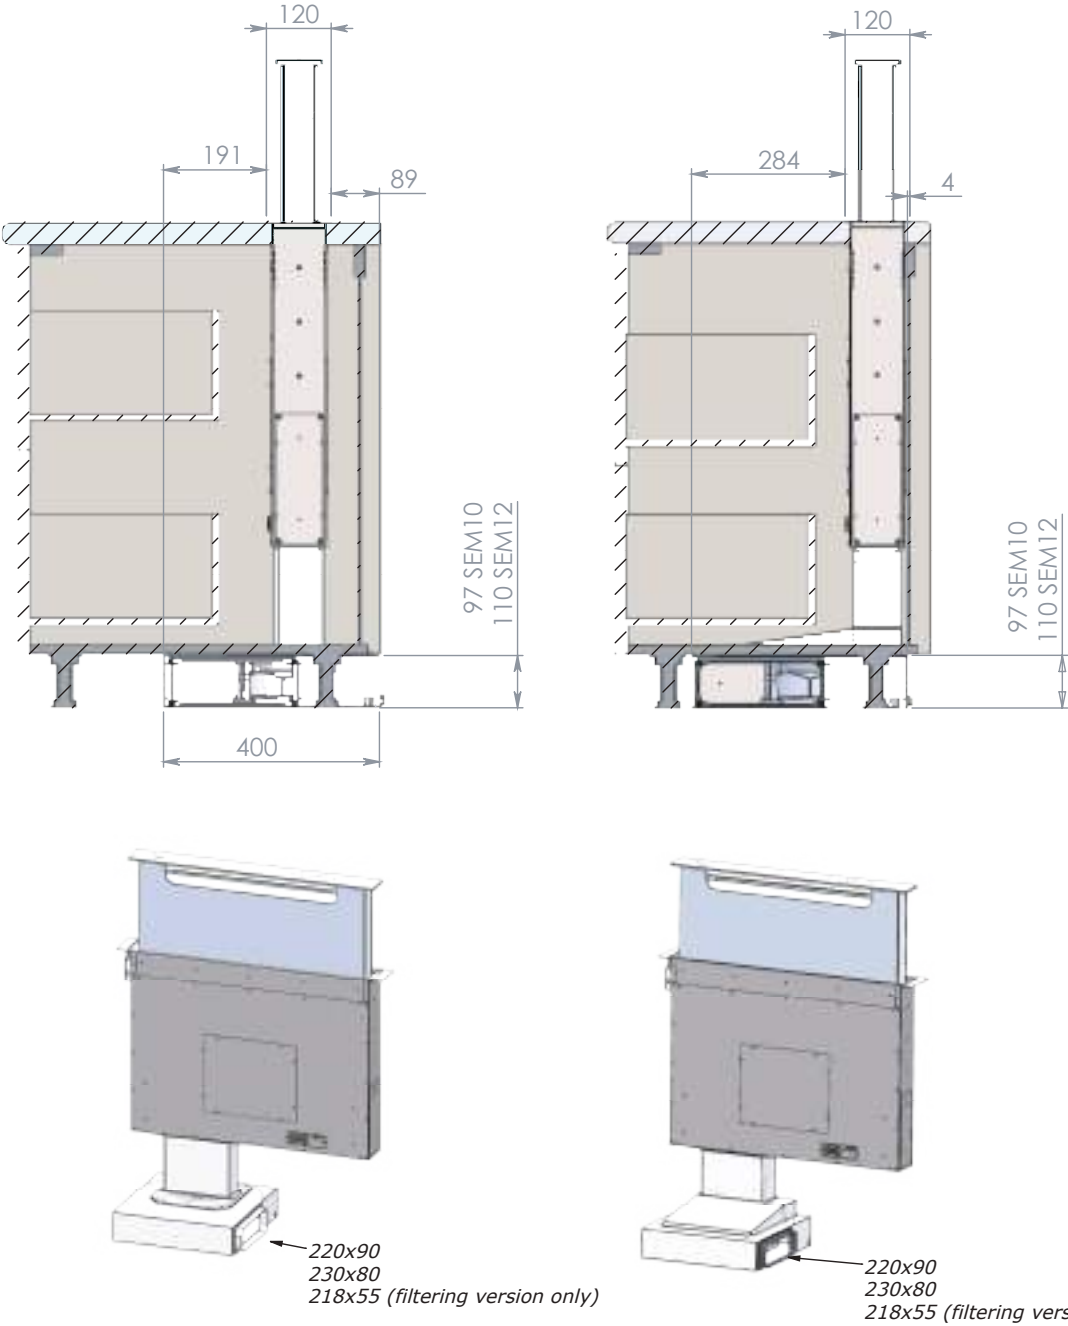



MIDDLE SDD 20

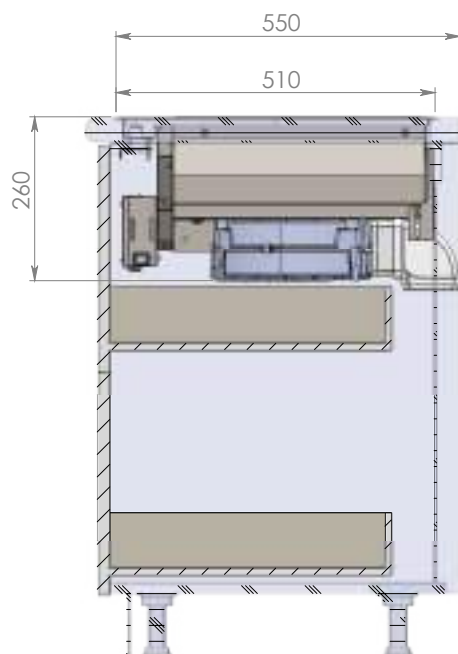





DUCTING VERSION

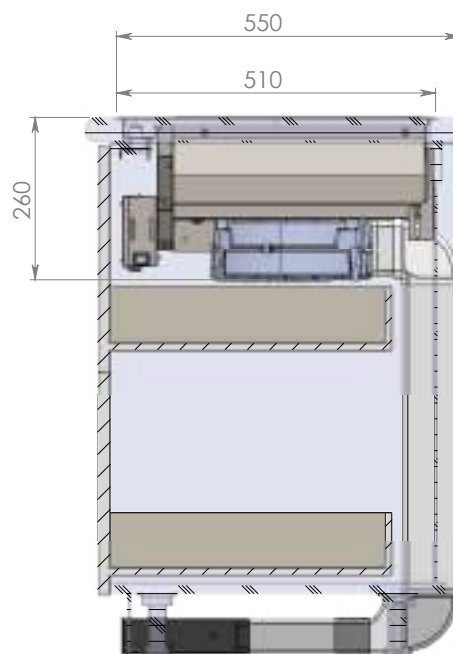

FILTERING VERSION

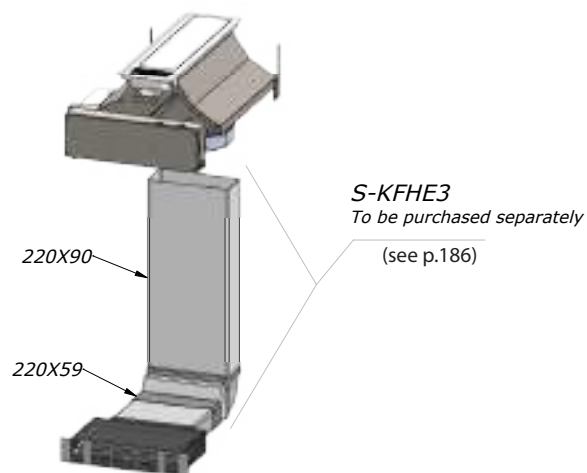
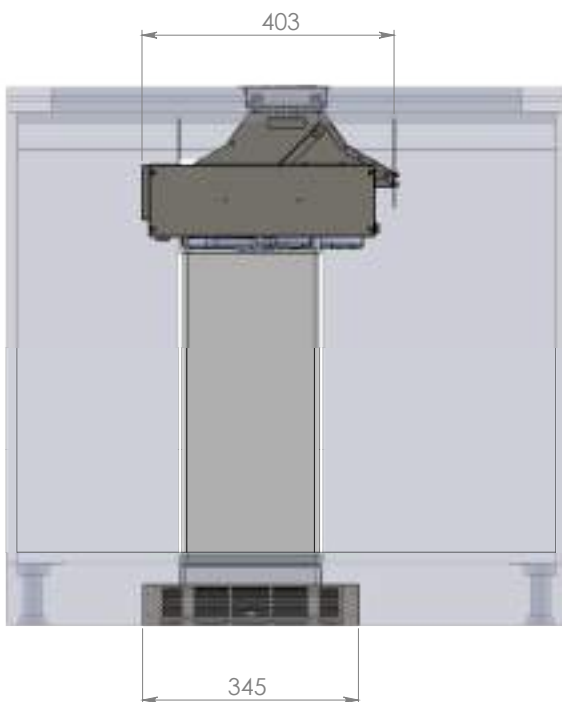


PUSH UP SDD11 WITH SEM10 - SEM12

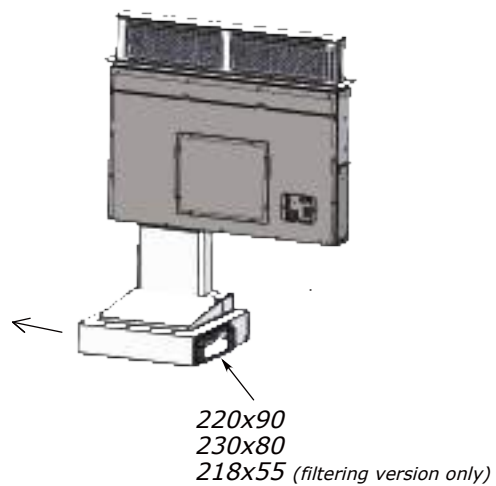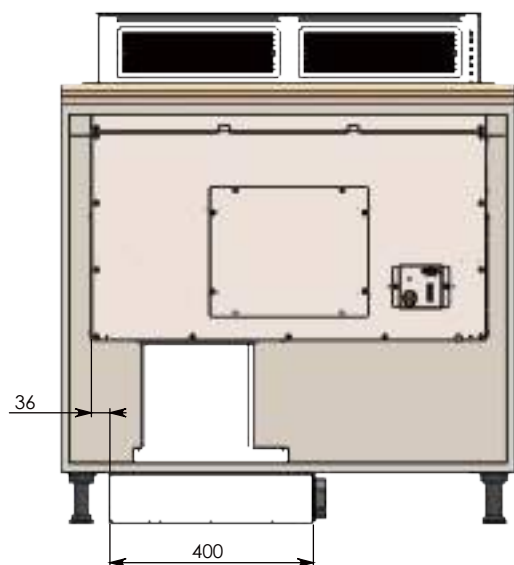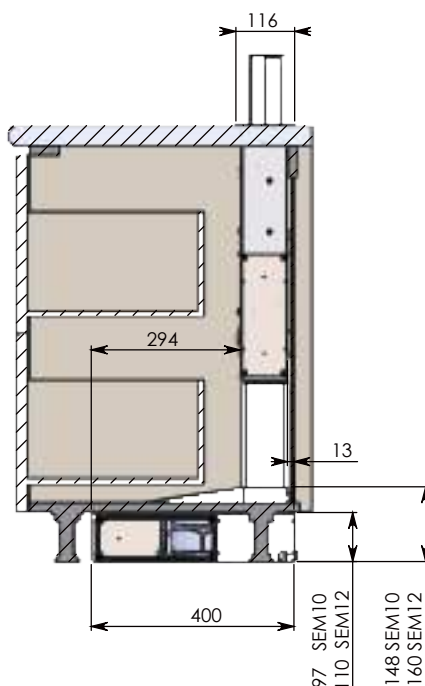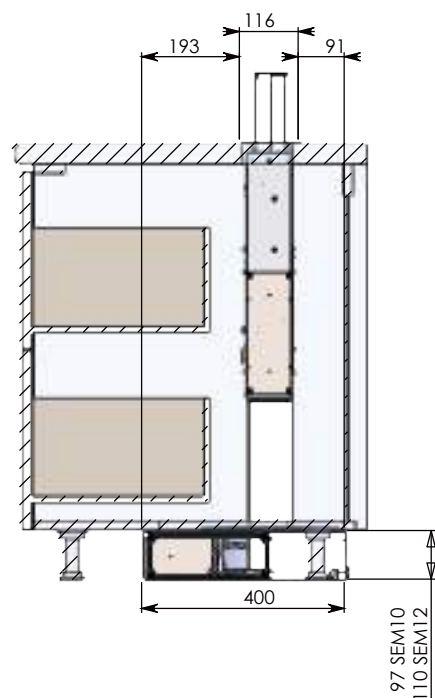


PUSH UP SDD11 WITH SEM1 - SEM2


(USING KIT INSTALLATION SDD16 WITH SEM1 OR SEM2)

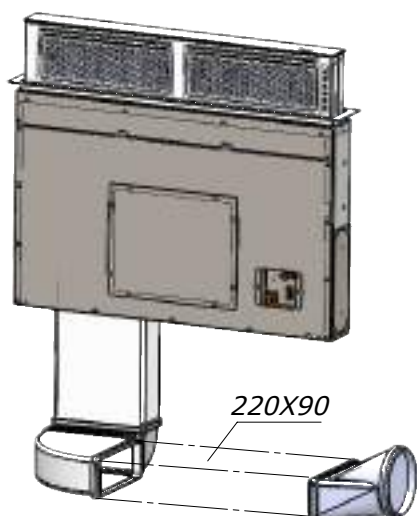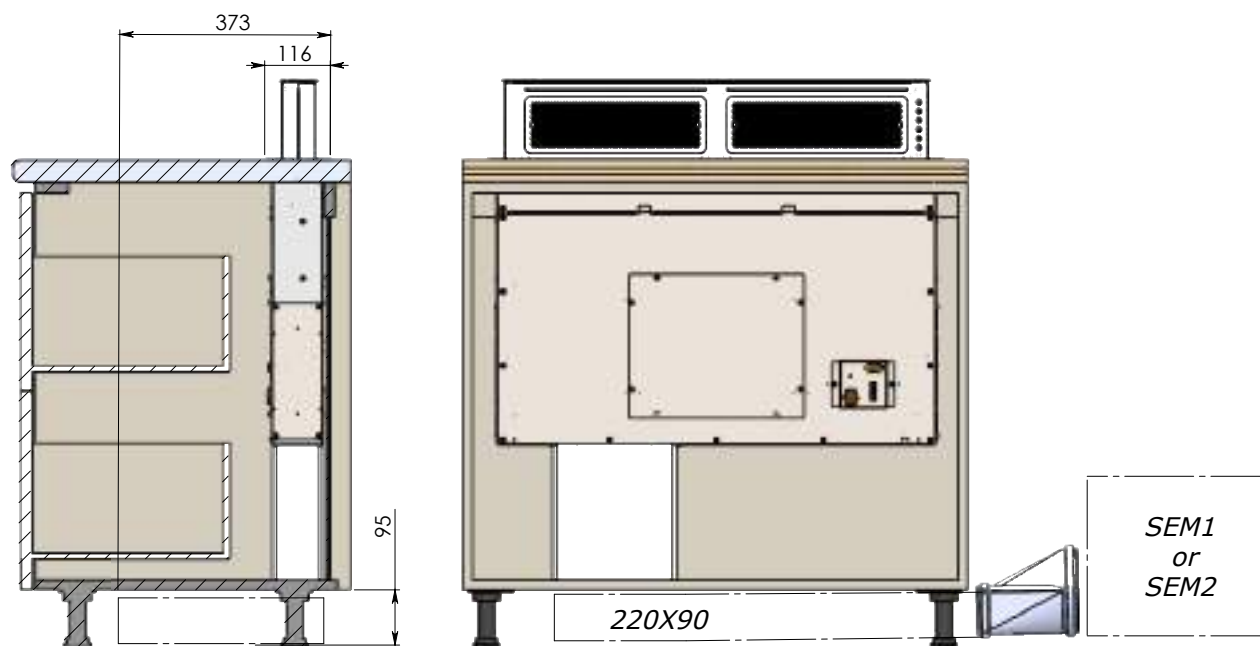

KIT INSTALLATION SEM1 OR SEM2

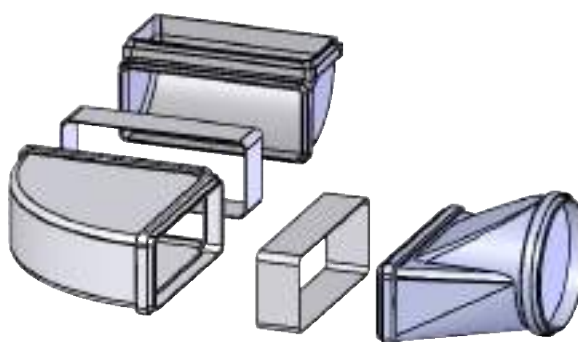

S DD2 - SDD2 L F.T. AND SUNRISE SDD13 WITH SEM10
SDD2 L F.T. CM 90 WITH SEM12*

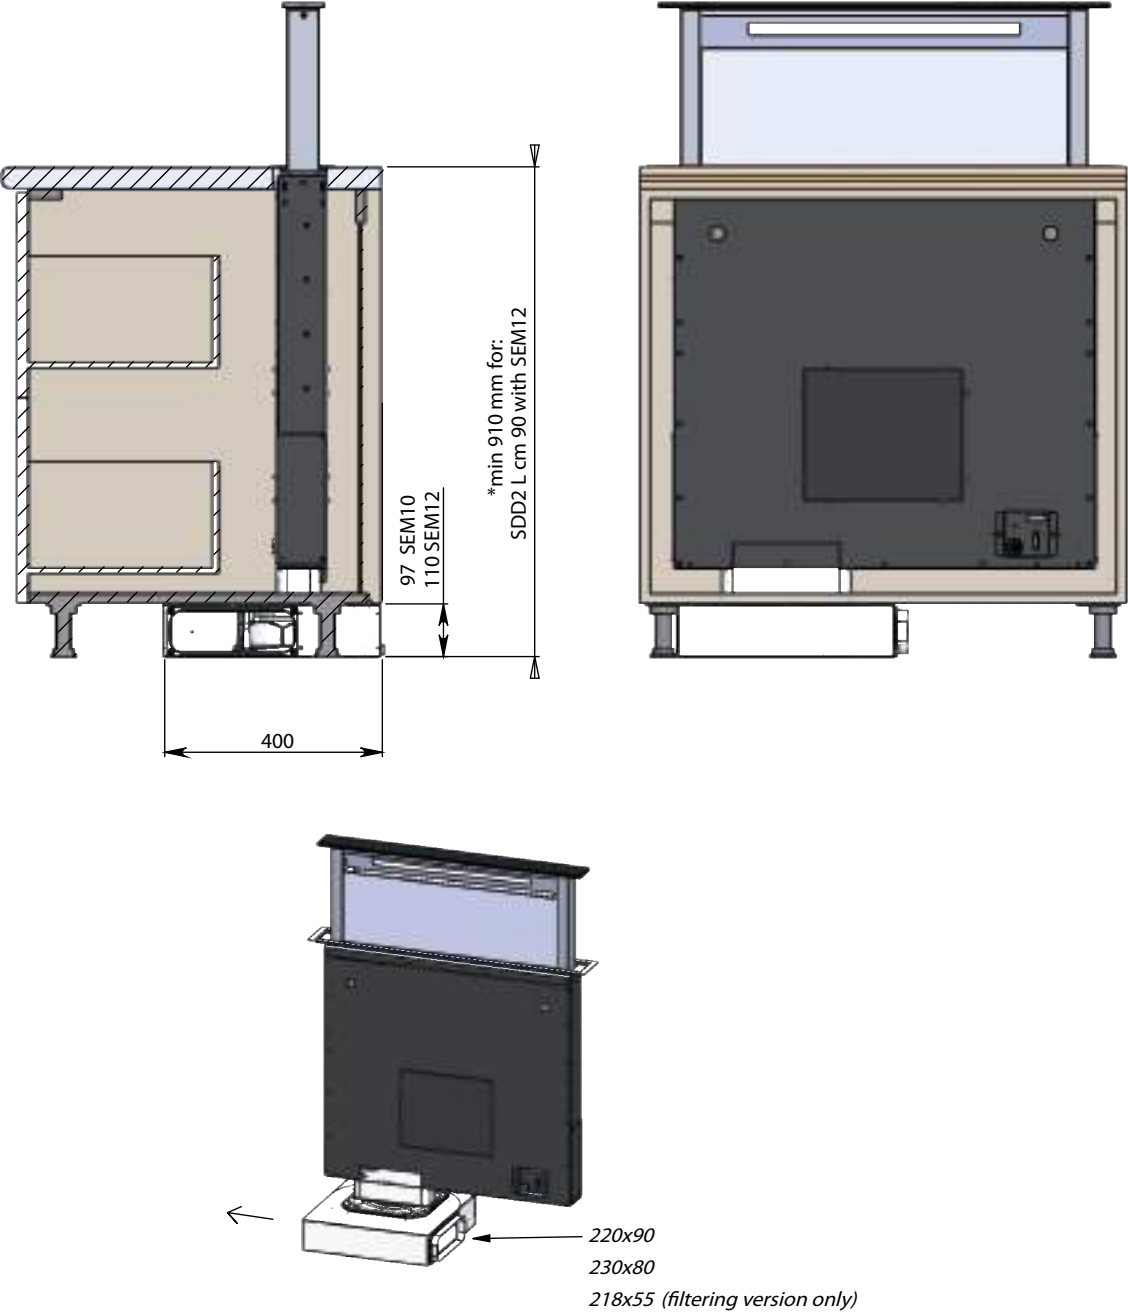





CEILING

Design ceiling hoods, which combine materials such as stainless steel or glass, with different luminous elements, able to create exclusive home environments and responding to different aesthetic and functional needs based on the characteristics of your kitchen.



INSIDE OUT SLT 980

Inside Out is a ceiling hood equipped with advanced technologies and characterised by minimal lines and extreme attention to details. This is the perfect synthesis between aesthetics, efficiency and functionality. This range hood activates by remote control and descends from the ceiling, allowing the extraction of cooking vapours. After use, the hood goes back to hide in the ceiling.

Motor:

Motor on board or external motor version (to be purchased separately)

Lighting:

Dimmable and dynamic Led 11W (2700 to 6500K)

Control panel:


Remote control

Filter:

Anodized aluminum (5+1 layers)

Finishing:

White matt painted

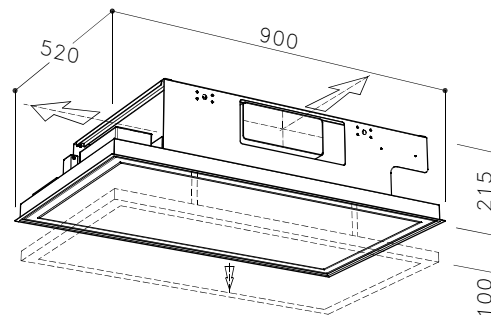

Installation:

For the installation create a false ceiling with a niche of 890mm x 510mm whose minimum height to be reached is 220 mm

product	dim.	motor	model identifier	EEC
SLT 980 E.LA. BRHM	520x900	on board	C980090RC1375181	A+
SLT 980 E.LA. EM	520x900	SEM1	C980093RC1295181	A
SLT 980 E.LA. EM	520x900	SEM2	C980093RC1155181	C

SUPERNOVA SLT 976

Motor:

Motor on board or external motor version (to be purchased separately)

Lighting:

2x1,4W Dimmable and dynamic spot leds (2700 to 6500°K)

Control panel:

Remote control

App

Voice assistant

Filter:

Anodized aluminum (5+1 layers)

Material:

Painted Stainless Steel

Handmade ceramic domes

Finishing:

Ceiling plate matt white painted

Ceramic domes white or black matt


Installation:

For the installation create a false ceiling with a niche of 425mm x 915mm whose minimum height to be reached is 200 mm


It is possible to add a Supernova Lamp (max 3 units)

See page 70

product	dim.	motor	model identifier	EEC
SLT 976 E.LA. 4V APP	440x930	on board	C976093RA1244681	B
SLT 976 E.LA. BRHM APP	440x930	on board	C976093RA1374681	A++
SLT 976 E.LA. EM APP	440x930	SEM1	C976093RA1294681	A
SLT 976 E.LA. EM APP	440x930	SEM2	C976093RA1154681	B

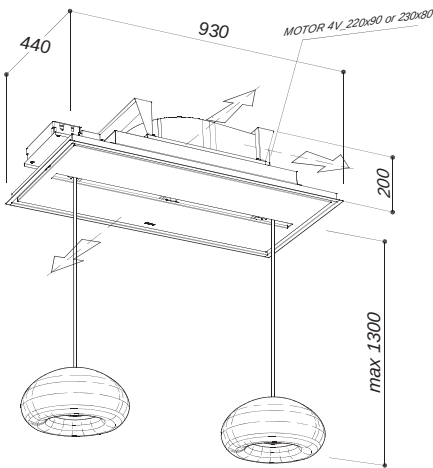

motor on board/external motor

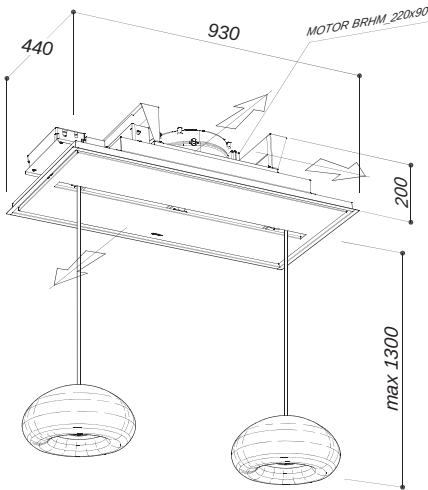


brushless motor







SUPERNOVA AUTOMATIC

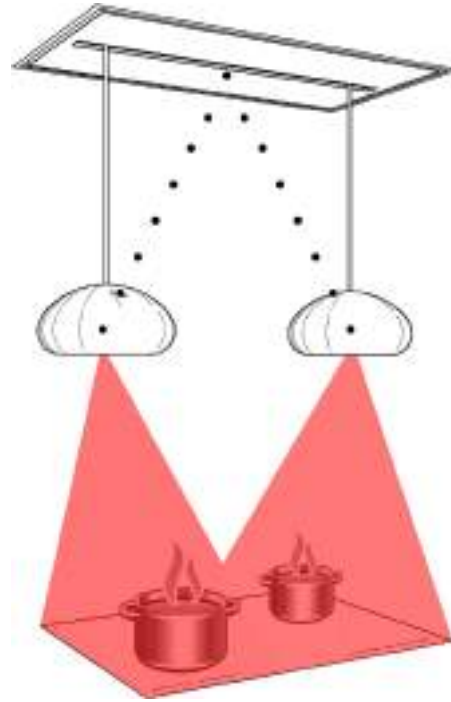

ARTIFICIAL INTELLIGENCE SYSTEM - AIS

This innovative system, patented by Sirius, is made up of sensors and technologically advanced electronic devices working in synergy.

As you start cooking, the range hood autonomously activates and adjusts the suction power, by detecting constantly both the temperature and air quality while cooking.

This innovative technology allows an autonomous and automatic operation of products and is completely independent from the kind of hob you use (gas, induction, etc.).



SUPERNOVA LAMP

Entirely hand-made by Deruta ceramic masters, Supernova Lamp is the new Sirius hanging lamp that can perfectly match Supernova range hood.

A new generation led spot properly lightens the worktop below.

Lighting


1x1,4W Dimmable and dynamic Led spot (2700K to 6500K)

Material


Handmade ceramic

Finishing

Ceramic Dome: matt black or matt white painted

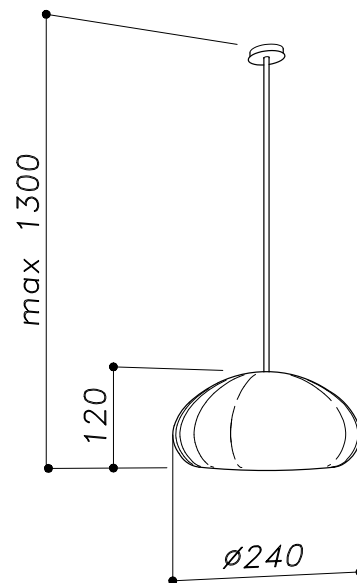



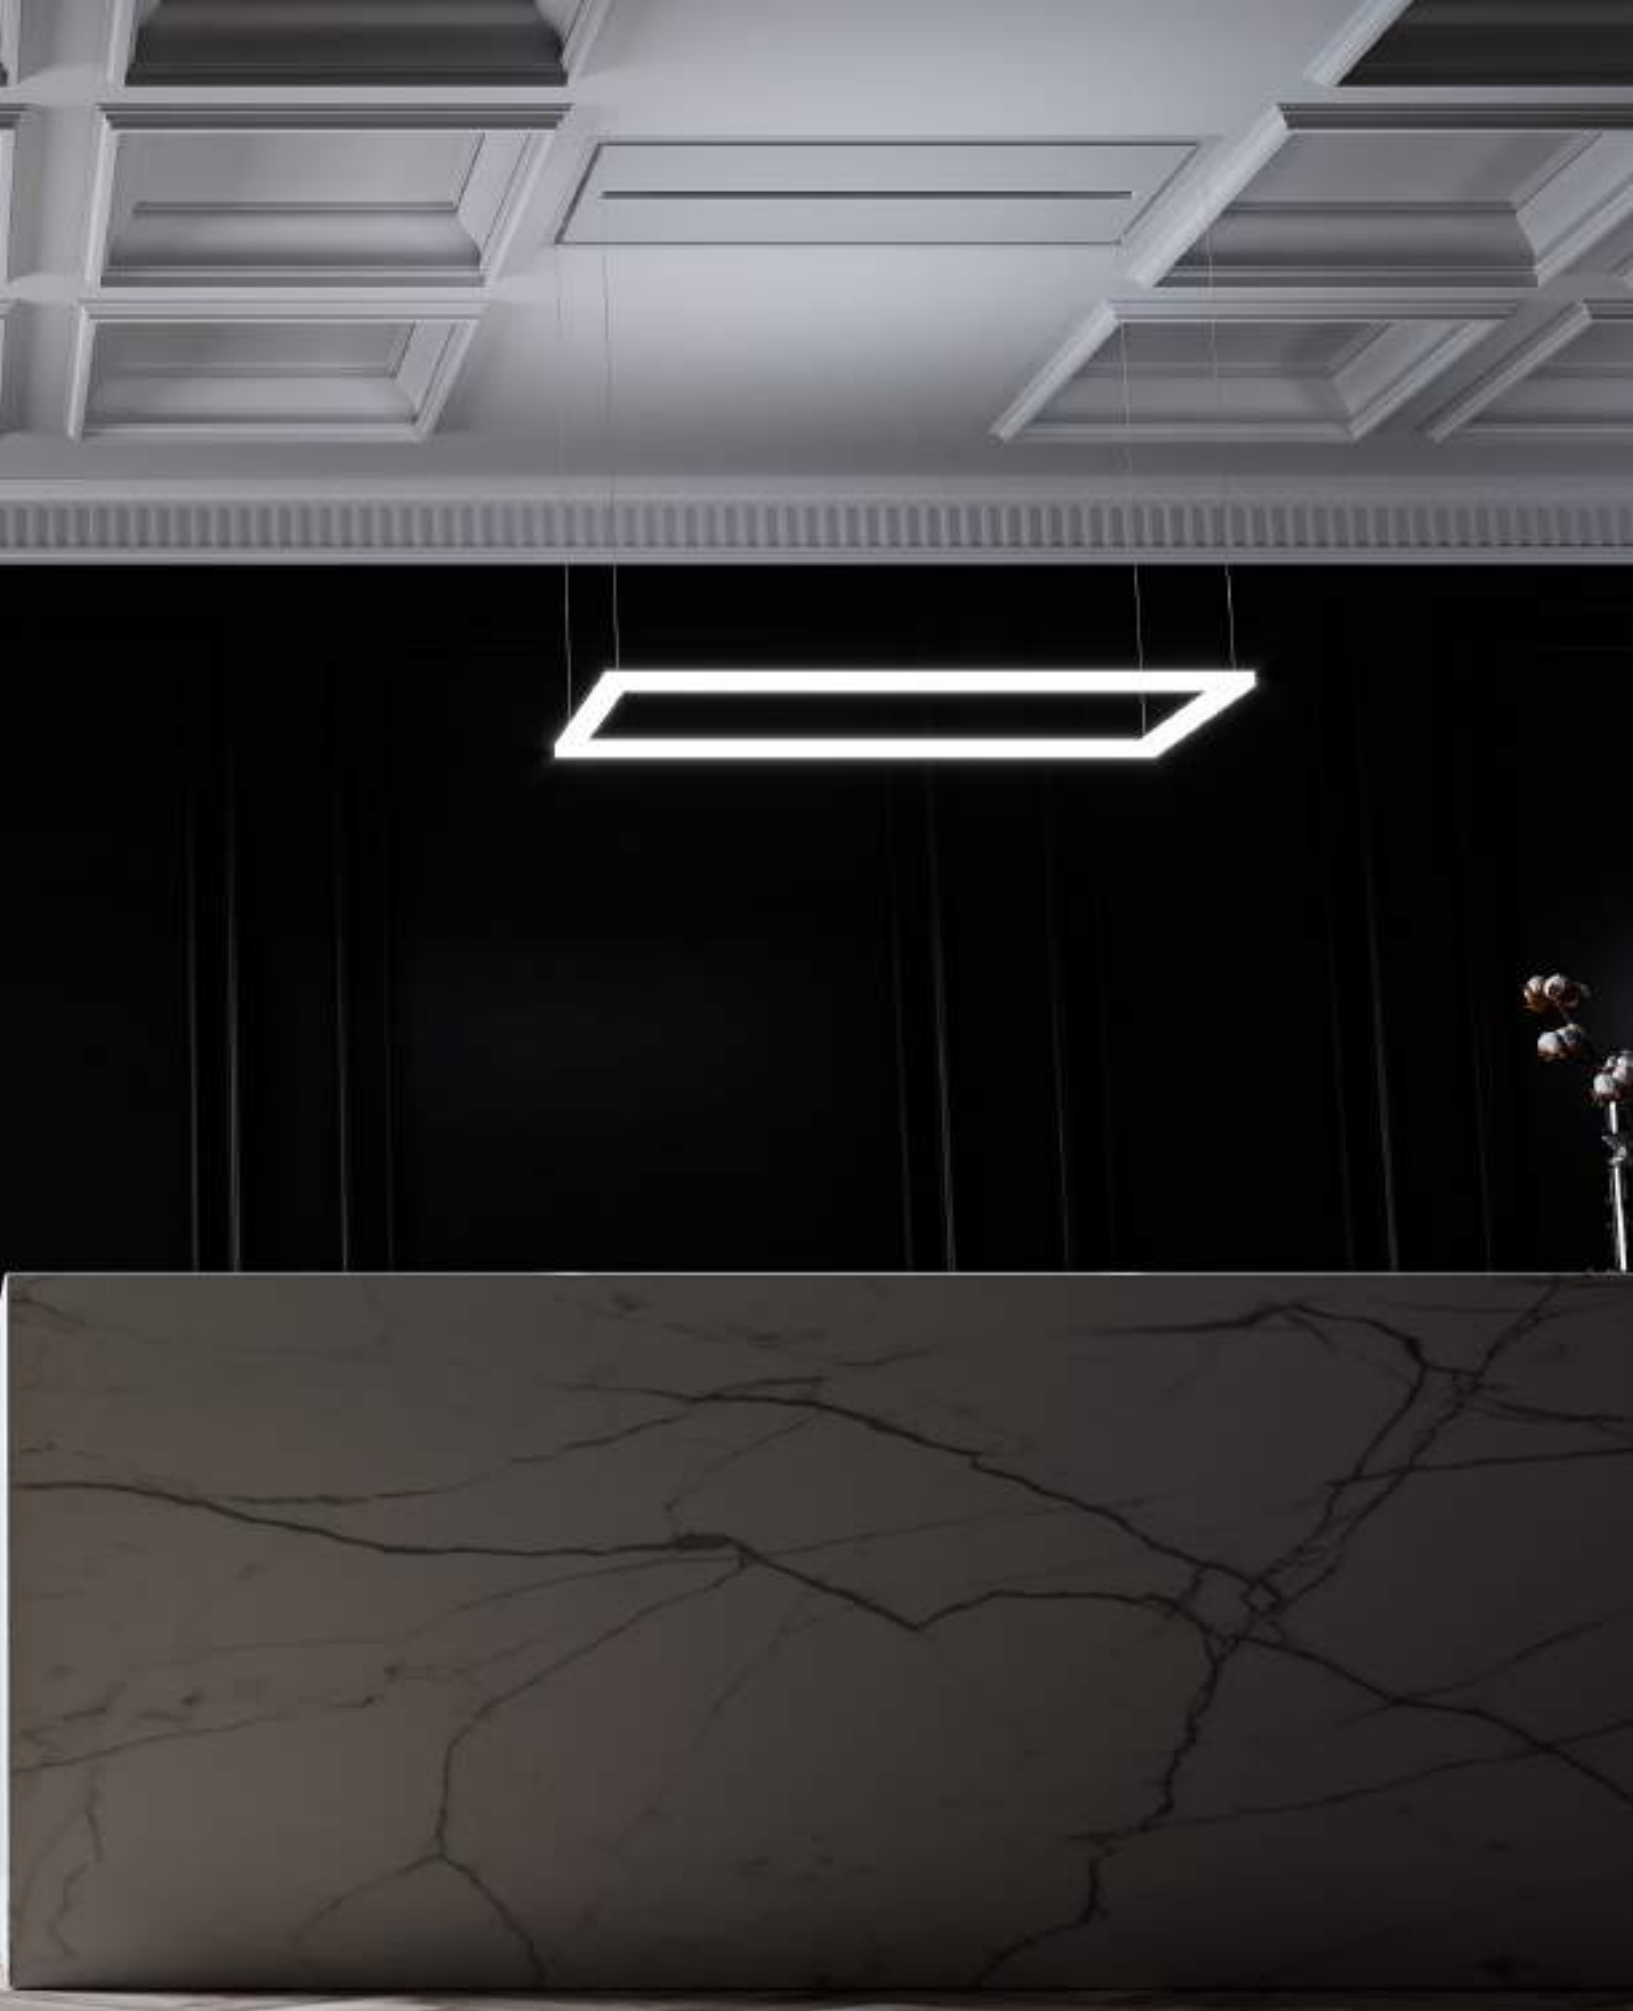

KITE LIGHT SLT 978 L

Motor:

Motor on board or external motor version
(to be purchased separately)

Lighting:

Dimmable and dynamic full Led 11 W (2700 to 6500K)

Control panel:

Remote control

App

Voice assistant

Filter:

Anodized aluminum (5+1 layers)

Material:

Stainless Steel


Finishing:

Ceiling plate matt white painted


Installation:

For the installation create a false ceiling with a niche of 425mm x 915mm whose minimum height to be reached is 200 mm

product	dim.	motor	model identifier	EEC
SLT 978 LIGHT 4V APP	440x930	on board	C978093RA1245281	B
SLT 978 LIGHT BRHM APP	440x930	on board	C978093RA1375281	A+
SLT 978 LIGHT EM APP	440x930	SEM1	C978093RA1295281	A
SLT 978 LIGHT EM APP	440x930	SEM2	C978093RA1155281	C

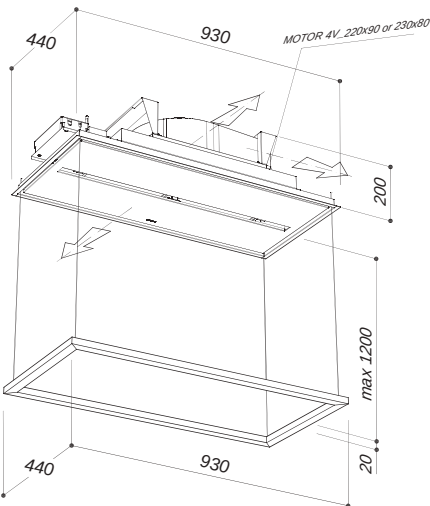

motor on board/external motor

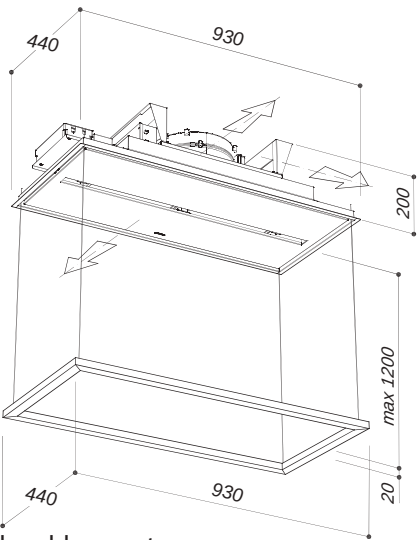

brushless motor







KITE SLT 978

Motor:

Motor on board or external motor version
(to be purchased separately)

Lighting:

Dimmable and dynamic Led 11 W (2700 to 6500K)

Control panel:

Remote control

App

Voice assistant

Filter:

Anodized aluminum (5+1 layers)

Material:

Stainless Steel

Finishing:



Ceiling plate matt white painted

Led frame matt black or matt white

Installation:

For the installation create a false ceiling with a niche of 425mm x 915mm whose minimum height to be reached is 200 mm

product	dim.	motor	model identifier	EEC
SLT 978 4V APP	440x930	on board	C978093RA1245281	B
SLT 978 BRHM APP	440x930	on board	C978093RA1375281	A+
SLT 978 EM APP	440x930	SEM1	C978093RA1295281	A
SLT 978 EM APP	440x930	SEM2	C978093RA1155281	C

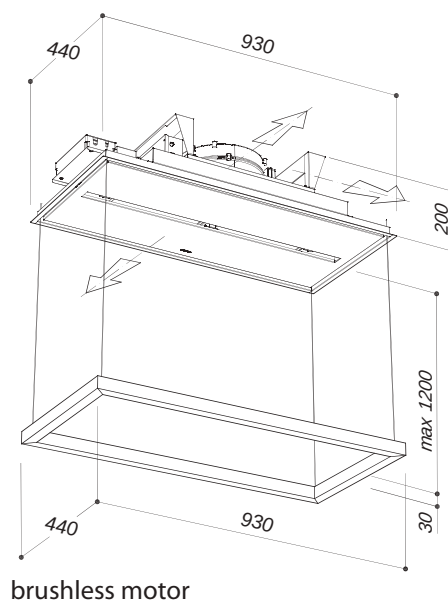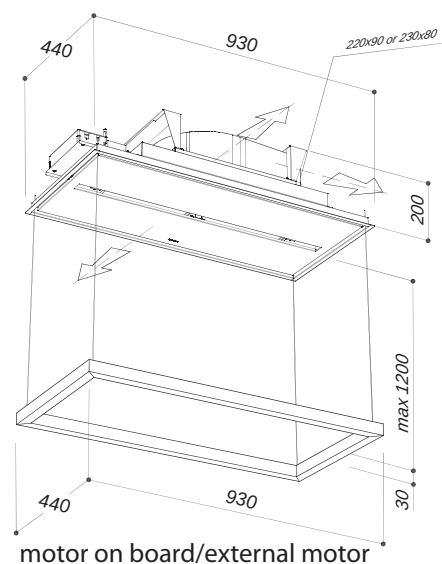

LINE SLT 977

Motor:

Motor on board or external motor version
(to be purchased separately)

Lighting:

Dimmable and dynamic full Led 5 W (2700 to 6500K)

Control panel:

Remote control

App

Voice assistant

Filter:

Anodized aluminum (5+1 layers)

Material:

Stainless Steel



Finishing:

Ceiling plate matt white painted

Installation:

For the installation create a false ceiling with a niche of 425mm x 915mm whose minimum height to be reached is 200 mm

product	dim.	motor	model identifier	EEC
SLT 977 4V APP	440x930	on board	C977093RA1245481	B
SLT 977 BRHM APP	440x930	on board	C977093RA1375481	A++
SLT 977 EM APP	440x930	SEM1	C977093RA1295481	A
SLT 977 EM APP	440x930	SEM2	C977093RA1155481	B

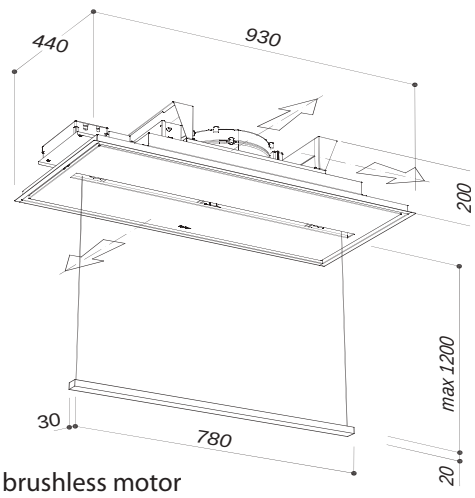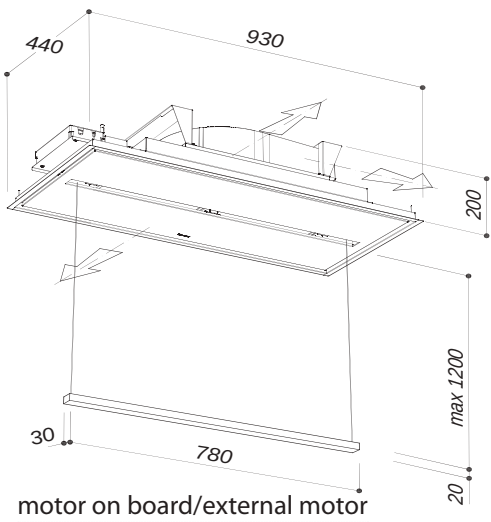









HALO LIGHT SLT 973 L

Motor:

Motor on board or external motor version (to be purchased separately)

Lighting:

Dimmable and dynamic round full Led 10W (2700 to 6500K)

Control panel:

Remote control

App

Voice assistant

Filter:

Anodized aluminum (5+1 layers)

Material:


Stainless Steel

Finishing:


Ceiling plate in stainless Steel matt white painted

Installation:

For the installation create a false ceiling with a round niche of 510mm whose minimum height to be reached is 220 mm

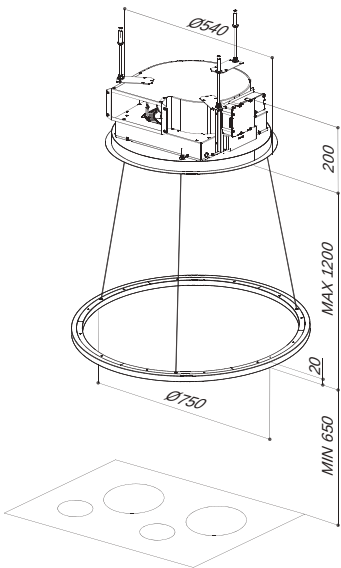

motor on board/external motor

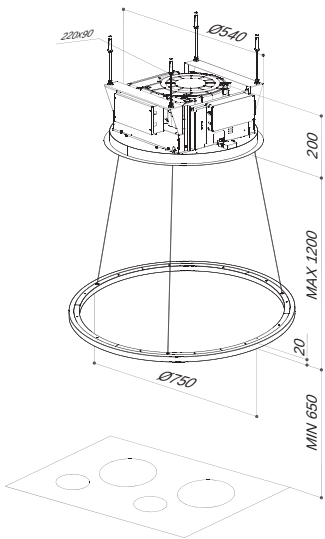

brushless motor

product	motor	model identifier	EEC
SLT 973 4V LIGHT APP	on board	C973075RA1245333	B
SLT 973 BRHM LIGHT APP	on board	C973075RA1375333	A+
SLT 973 EM LIGHT APP	SEM1	C973075RA1295333	A
SLT 973 EM LIGHT APP	SEM2	C973075RA1155333	C





HALO SLT 973

Motor:

motor on board or external motor version (to be purchased separately)

Lighting:

Dimmable and dynamic round Led 10W (2700 to 6500K)

Control panel:

Remote control

App

Voice assistant

Filter:

Anodized aluminum (5+1 layers)

Material:

Stainless Steel

Finishing:


Ceiling plate in stainless Steel matt white painted

Led frame matt black or white


Installation:

For the installation create a false ceiling with a round niche of 510mm whose minimum height to be reached is 220 mm

product	motor	model identifier	EEC
SLT 973 4V APP	on board	C973075RA1245333	B
SLT 973 BRHM APP	on board	C973075RA1375333	A+
SLT 973 EM APP	SEM1	C973075RA1295333	A
SLT 973 EM APP	SEM2	C973075RA1155333	C

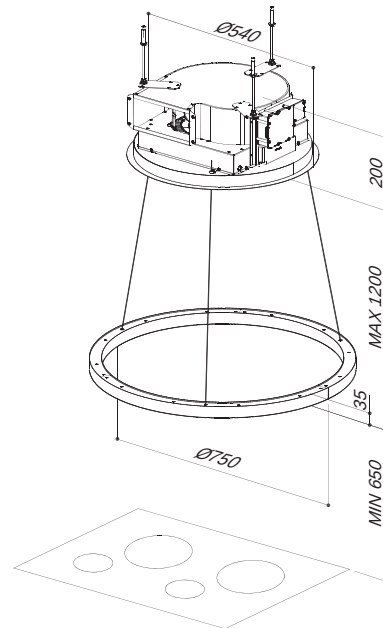

motor on board/external motor

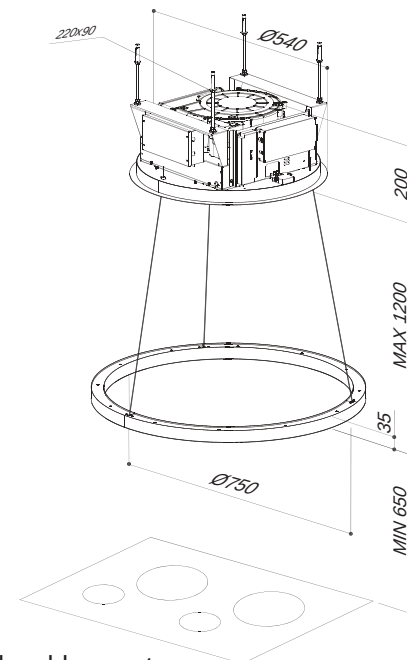

brushless motor



SCREEN SLT 974

Motor:

motor on board or external motor version (to be purchased separately)

Lighting:

Dimmable and dynamic Led panel 7W (2700 to 6500°K)

Control panel:

Remote control

App

Voice assistant

Filter:

Anodized aluminum (5+1 layers)

Material:


Stainless steel

Finishing:


White painted

Installation:

For the installation create a false ceiling with a niche of 815mm for 465mm whose minimum height to be reached is 220mm

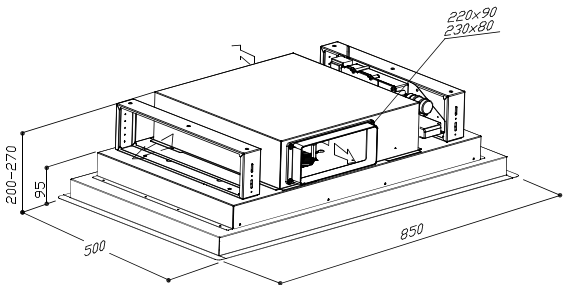

motor on board/external motor

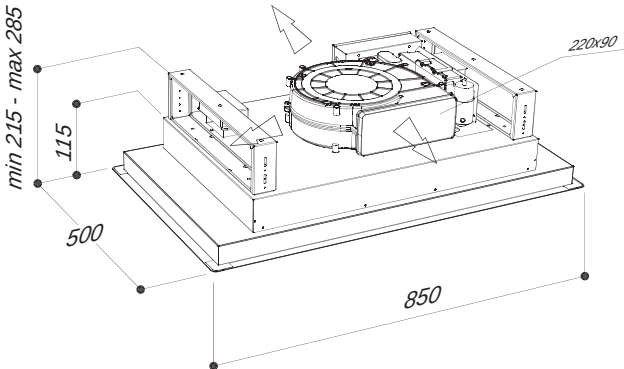

brushless motor

product	dim.	motor	model identifier	EEC
SLT 974 4V APP	500x850	on board	C974085RC1243773	B
SLT 974 BRHM APP	500x850	on board	C974085RA1373773	A++
SLT 974 EM APP	500x850	SEM1	C974085RA1293773	A
SLT 974 EM APP	500x850	SEM2	C974085RC1153773	B



FRAME SLT 970

Motor:

motor on board or external motor version (to be purchased separately)

Lighting:

3x2,5W Dimmer Led spotlight

Control panel:

Remote control

Filter:

Anodized aluminum (5+1 layers)

Material:


White glass

Finishing:


White glass with crystal transparent edge

Installation:


For the installation create a false ceiling with a niche of 850mm x 470mm whose minimum height to be reached is 200 mm (Built-in version)

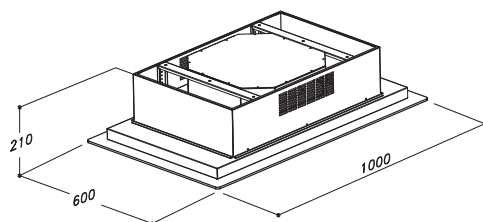


freestanding (filtering version only)
motor on board

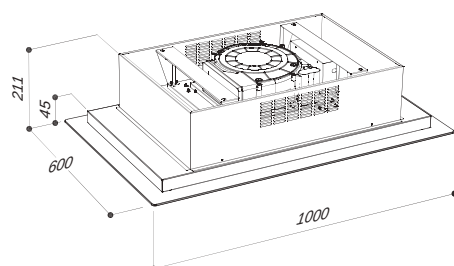

freestanding (filtering version only)
brushless motor

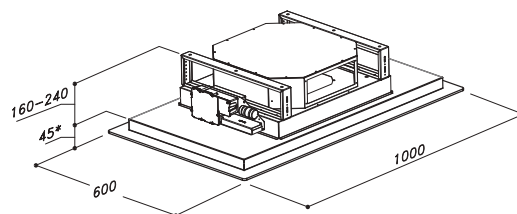

built-in
** this part must not be built-in*
motor on board/external motor

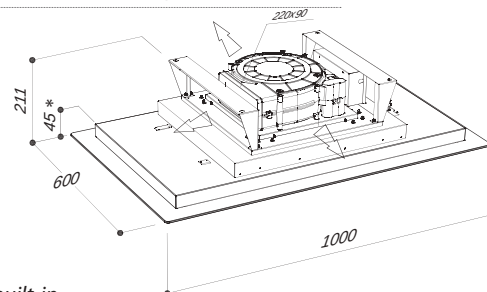

built-in
** this part must not be built-in*
brushless motor



product	dim.	motor	model identifier	EEC
SLT 970	600x1000	on board	C970100RC1243637	B
SLT 970 BRH M	600x1000	on board	C970100RC1373637	A++
SLT 970 EM	600x1000	SEM1	C970100RC1293643	B
SLT 970 EM	600x1000	SEM 2	C970100RC1153643	C

LESS SLT 971

Motor:

motor on board or external motor version (to be purchased separately)

Lighting:

6W Dimmable and dynamic Led bar (2700 to 6500°K) (90cm version)

2X3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (120cm version)

Control panel:

Remote control

Filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430 (SLT971 inox version)

White painted stainless steel and glass (SLT971 glass version)

Finishing:

Stainless steel (SLT971 inox version)


White painted stainless steel and white glass panel (SLT971 glass version)

Installation:


For the installation create a false ceiling with a niche of:

865mmx 515mm whose minimum height to be reached is 210mm (SLT971 cm90 motor on board version) or 170mm (SLT971 cm90 external motor version)


1165mm x 615mm whose minimum height to be reached is 210mm (SLT971 cm120 motor on board version) or 170mm (SLT971 cm120 external motor version)

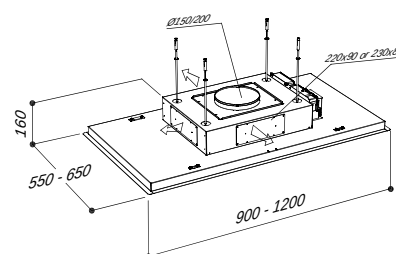

external motor

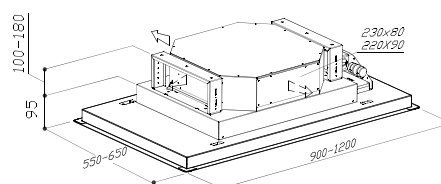


motor on board

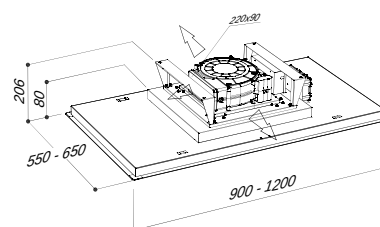

brushless motor

product	dim.	motor	model identifier	EEC
SLT 971	550x900	on board	C971090RC1244143	B
SLT 971 BRHM	550x900	on board	C971090RC1374143	A++
SLT 971 EM	550x900	SEM1	C971090RC1294143	B
SLT 971 EM	550x900	SEM 2	C971090RC1154143	C
SLT 971	650x1200	on board	C971120RC1244037	B
SLT 971 BRHM	650x1200	on board	C971120RC1374037	A++
SLT 971 EM	650x1200	SEM1	C971120RC1294037	B
SLT 971 EM	650x1200	SEM 2	C971120RC1154037	C

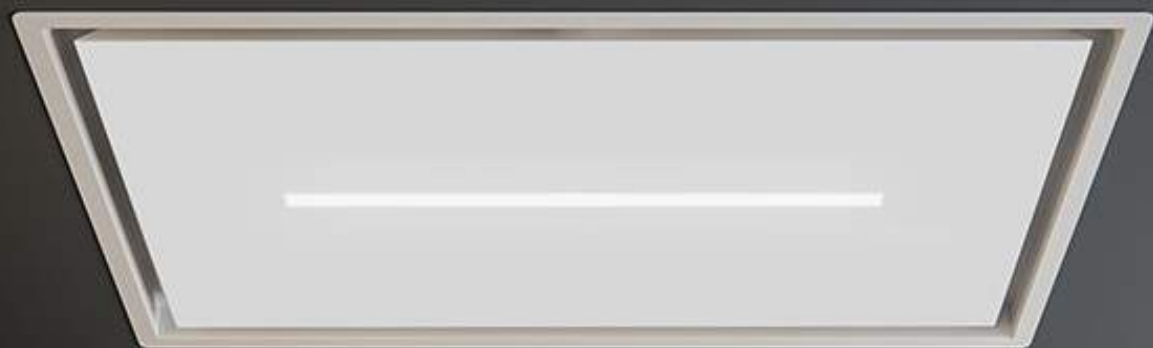

ZENDRA SLT979

Motor:

motor on board or external motor version (to be purchased separately)

Lighting:

2x5,5W Dimmable and dynamic Led panels (2700 to 6500°K)

Control panel:

Remote control
App Sirius
Voice assistant

Filter:

Anodized aluminum (5+1 layers)

Material:


Painted stainless Steel

Finishing:


White

Installation:

For the installation create a false ceiling with a niche of 1050mm for 645mm whose minimum height to be reached is 210mm

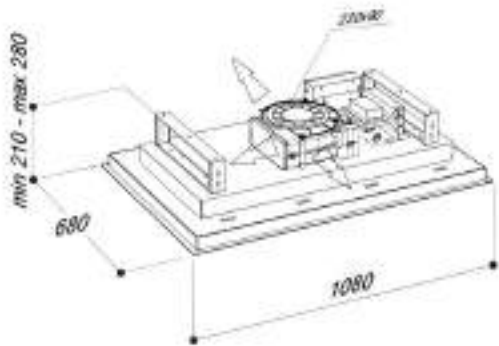

brushless motor

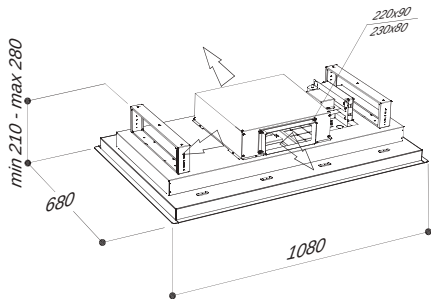

motor on board/external motor

product	dim.	motor	model identifier	EEC
SLT 979 E.LA. 4V APP	680x1080	on board	C979108RA1244860	B
SLT 979 E.LA. BRHM APP	680x1080	on board	C979108RA1374860	A+
SLT 979 E.LA. EM APP	680x1080	SEM 1	C979108RA1294860	A
SLT 979 E.LA. EM APP	680x1080	SEM 2	C979108RA1154860	B





SLT 958

Motor:

motor on board or external motor version (to be purchased separately)

Lighting:

2X3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control Panel:

Remote Control

Filter:

Anodized aluminum (5+1 layers)

Material:

Stainless Steel AISI430



Finishing:

stainless steel

white painted and white glass


Installation:

Create a false ceiling with a niche of 865mm x 405mm whose minimum height to be reached is 210mm.

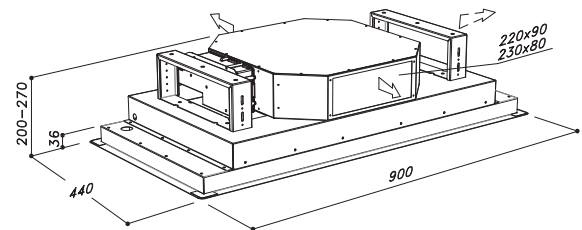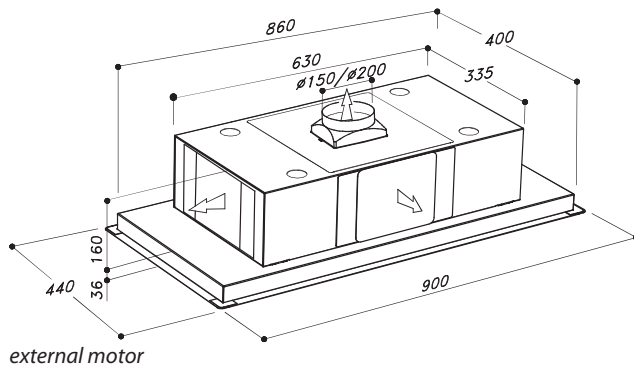

h200 version

product	dim.	motor	model identifier	EEC
SLT 958 H200	440x900	on board	C958090RC1244073	B
SLT 958 H200 BRHM	440x900	on board	C958090RC1374073	A++
SLT 958 EM	440x900	SEM 1	C958090RC1294037	B
SLT 958 EM	440x900	SEM 2	C958090RC1154037	B

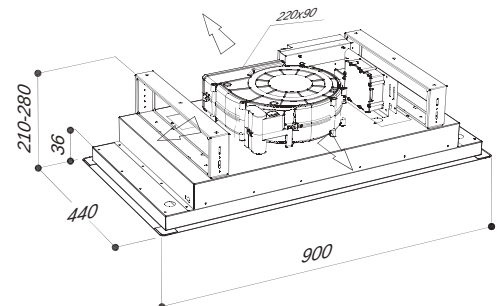

brushless motor



S-DF4 FILTERING KIT





The S-DF4 filtering kit can be combined with all built-in ceiling hoods allowing the customer to obtain the filtering version of the product.

Placed at a minimum distance of 1.5 meters from the ceiling hood, it allows perfect recirculation and filtering of the air sucked in by the ceiling hood.


The high efficiency carbon filters guarantee the perfect elimination of cooking odours.

CEILING HOOD

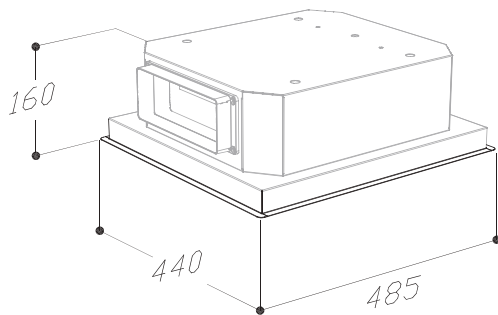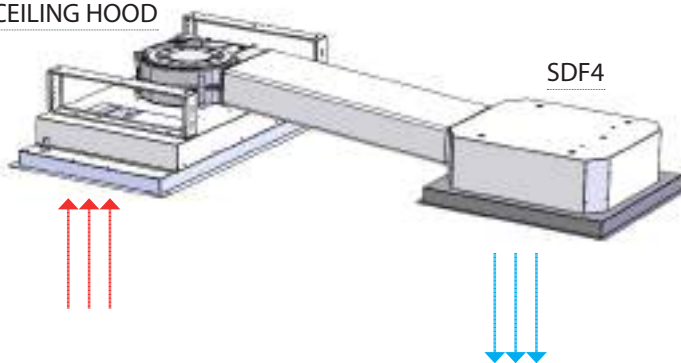

WHAT'S IN THE BOX?

- 1X KF24 HIGH EFFICIENCY CARBON FILTER
- 1X RECTANGULAR JOINT 220X90mm
- 1x ROUND JOINT D150mm

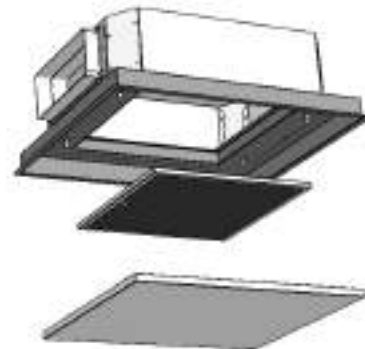

DECORATIVE ISLAND

Sirius island hoods represent the perfect technological and aesthetic solution for island or peninsula kitchens.

With an elegant and contemporary design, they adapt to any type of kitchen style and guarantee perfect functionality both in extraction and filtering mode









NEMESI SIL 36 TC

Motor

on board

Lighting:

2x6W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Touch control 4 speeds + light switch + timer + Anti-drop System

Filter:

Anodized aluminum (5+1 layers)


Finishing:

Black matte painted

Smoked glass



ANTI-DROP SYSTEM

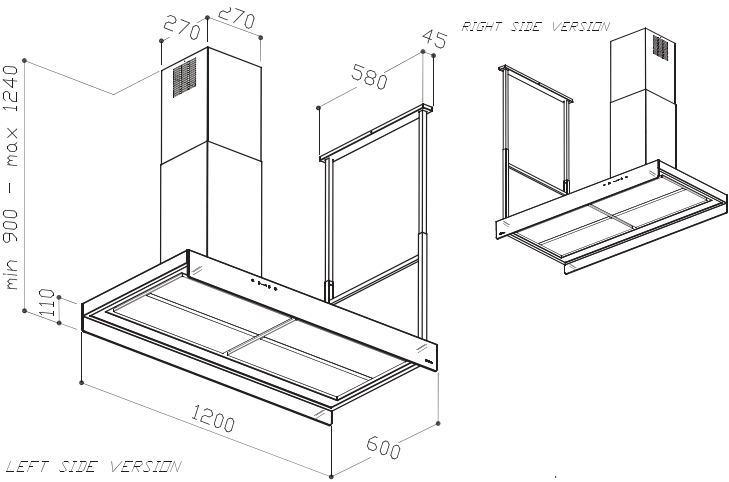

product
SILTC36

dim.
1200

motor
on board

model identifier
I036120TA1284143


EEC
A








SYMPHONY MO 409

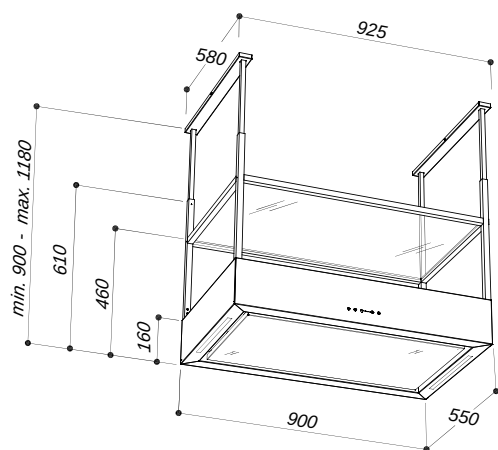

Symphony

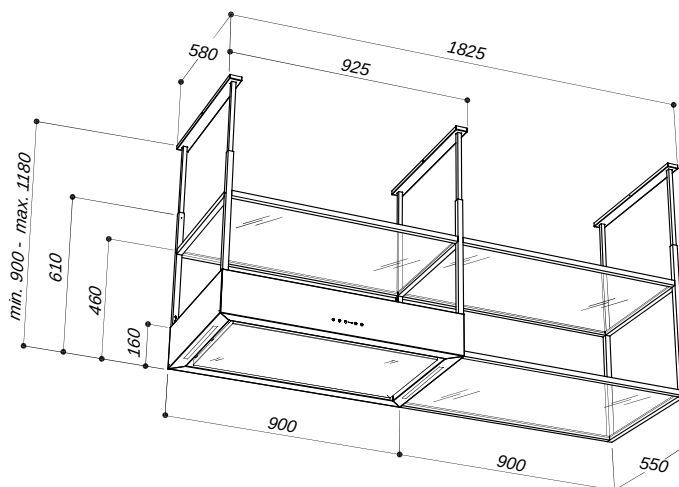

Symphony with accessory

Motor on board:

EBM 550m3/h

110W

50 dBA

Lighting:

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Touch control 4 speeds +light switch +timer+Anti-drop System

Filter:

Anodized aluminum (4+1 layers)

Washable carbon filter KF60 (Black)

Finishing:

Matt black painted


Smoked glass




ANTI-DROP SYSTEM



MELODY MO 409 W FILTERING

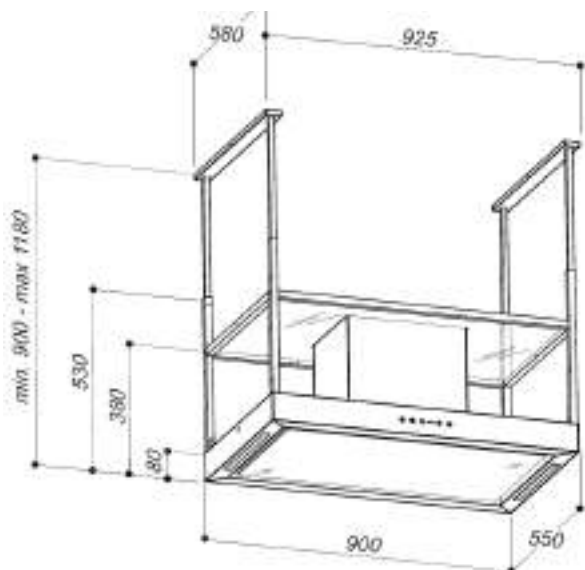

Melody filtering

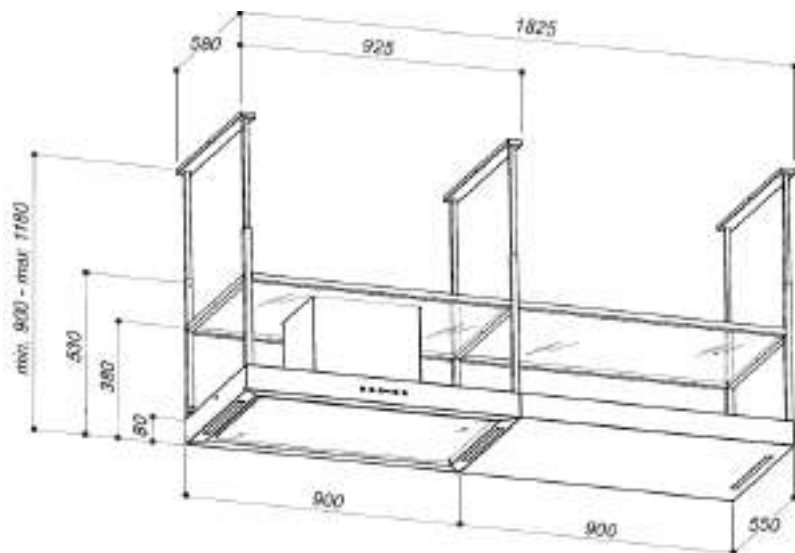

Melody filtering with accessory

Motor on board

Lighting:

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (Main module)

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (Accessory module)

Control panel:

Touch control 4 speeds+light switch+timer+Anti-drop System

Filter:

Anodized aluminum (4+1 layers)

Carbon filter KF2

Finishing:

Matt black painted

Smoked glass

Dimension:

Main module 90x55cm


Accessory module 90x55cm




ANTI-DROP SYSTEM



MELODY MO 409 W

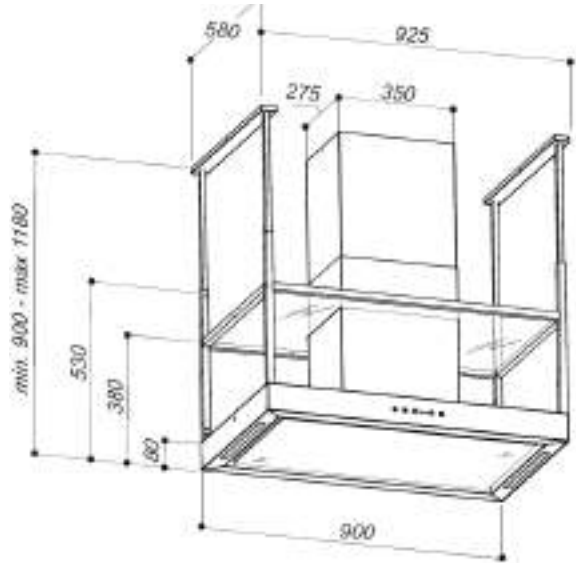

Melody

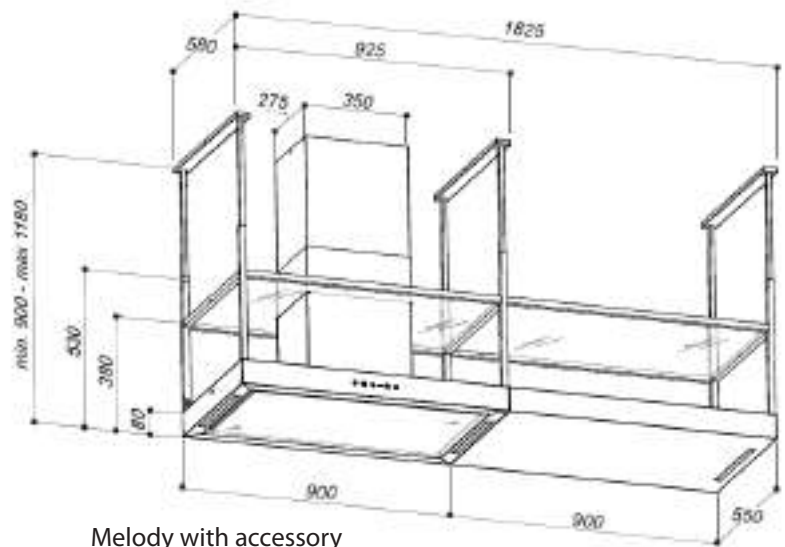

Melody with accessory

Motor on board

Lighting:

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (Main module)

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (Accessory module)

Control panel:

Touch control 4 speeds+light switch+timer+Anti-drop System

Filter:

Anodized aluminum (4+1 layers)

Finishing:

Matt black painted

Smoked glass

Dimension:

Main module 90x55cm


Accessory module 90x55cm

product	motor	model identifier	EEC
MO409W	on-board	I409090TA1104443	A
MO409W (with accesory)	on-board	I409090TB1104443	A



ANTI-DROP SYSTEM

ROLL SILT 28

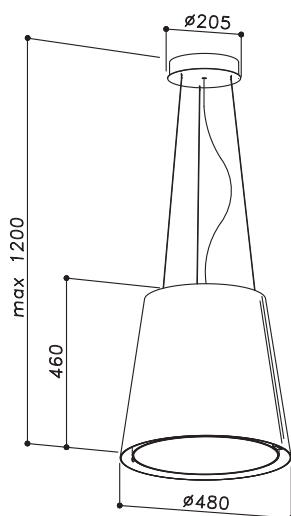

Motor on board:

600m3/h

230W

63dBA

Lighting:

Rounded NEON 40W

Control panel:

Remote control

Grease filter:

Anodized aluminum (4+1 layers)

Washable carbon filter KF39

Material:

Painted stainless steel

Finishing:

Gold, Copper, Black, White

Only filtering version

Only filtering version

Available in lamp version


Lighting:

round neon 40W





SIL 24 TC

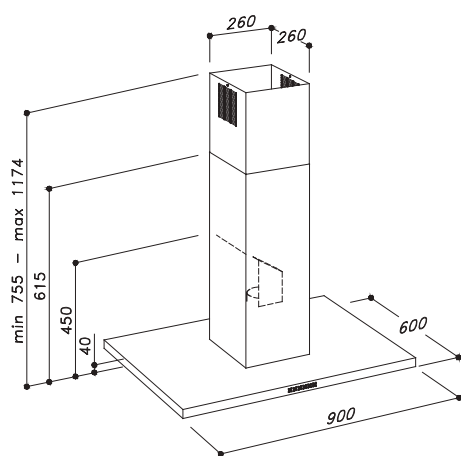

product dim. motor model identifier EEC
SIL 24 TC 900 on-board I024090TC1284437 A

Motor on board

Lighting:

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Touch Control 4 speeds + light switch + timer

Grease filter:

Baffle filter AISI430


Material:

Stainless steel AISI430 and glass

Finishing:

Black glass

SIL 24

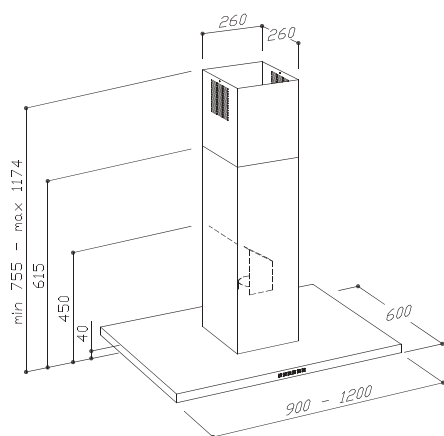

Motor on board

Lighting:

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Chromed 4 speeds push-button+light switch+timer


Grease filter:

Baffle filter AISI430

Material:

Stainless steel AISI430

product	dim.	motor	model identifier	EEC
SIL 24X	900	on-board	I024090PB1284437	A
SIL 24X	1200	on-board	I024120PB1284437	A

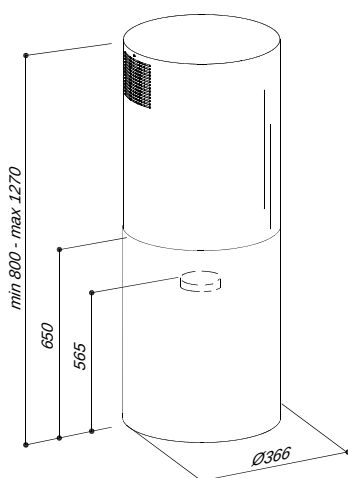

MO 407

Motor on board

Lighting:

2 Led spot 2,5W 4000°K

Control Panel:

Remote Control

Grease filter:

Anodized aluminum (5+1 layers)

Material:


Stainless steel AISI430

Finishing:

Stainless steel

Matt white painted

Matt black painted

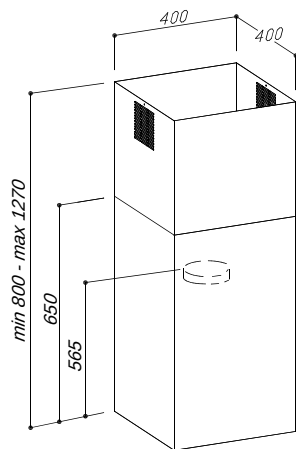

product
MO408

motor
on-board

model identifier
I408040RC1283685

EEC
A

MO 408

Motor on board

Lighting:

2 Led spot 2,5W 4000°K

Control Panel:

Remote Control

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430

Finishing:

Stainless steel

Matt white painted

Matt black painted






WALL

Sirius wall rangehoods are the perfect union of technology, functionality and design.

Unique and exclusive products that give character and style to any type of kitchen.



ARROW SLTC120

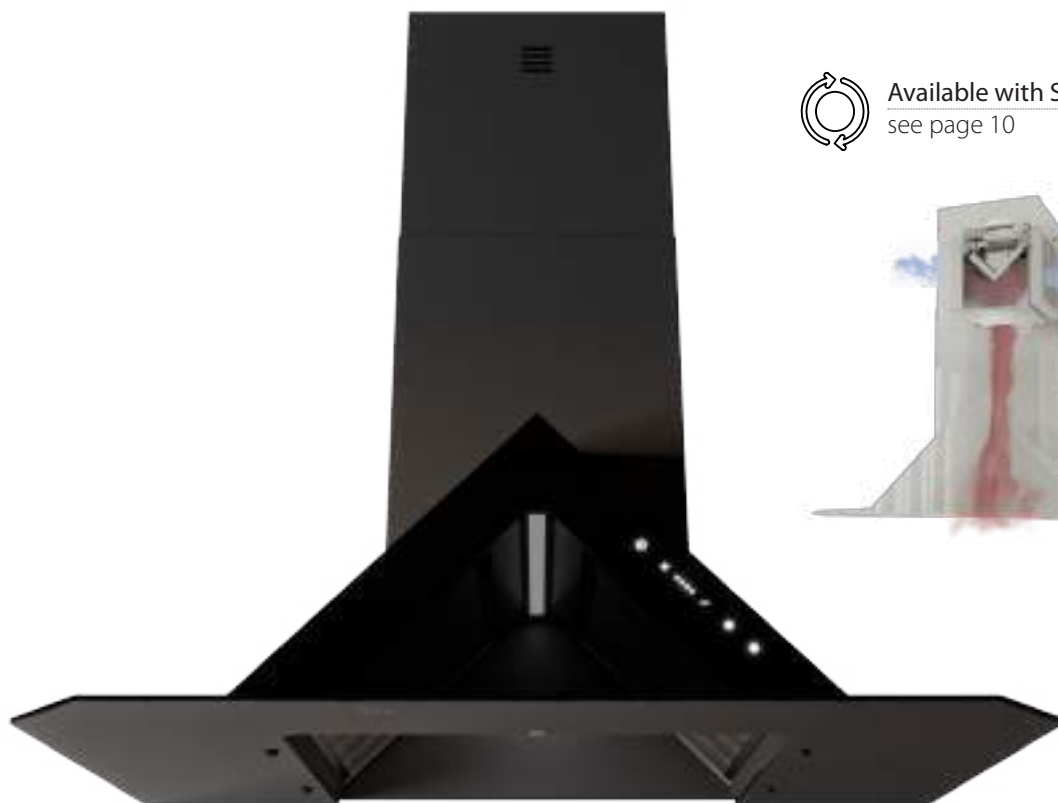

Available with S.A.M.S. System
see page 10



Motor:

on board

Lighting:

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Touch control 4 speeds + light switch
+ timer + Air Management System

Filter:


Anodized aluminum (5+1 layers)

Finishing:

Matt black painted

Smoked glass

S.A.M.S. Sirius Air Management System

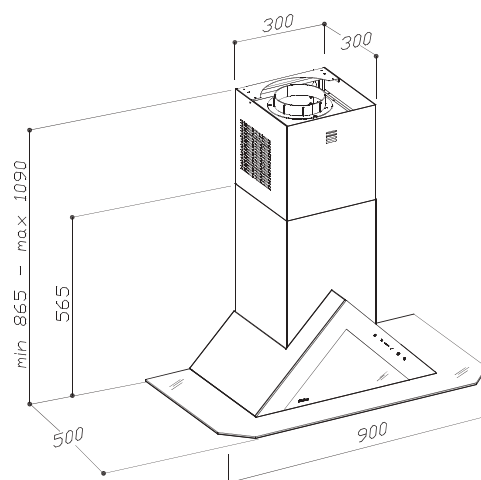

product	dim.	motor	model identifier	EEC
SL120	900	on board	P120090TV1284404	A+

FLAT SLTC 111

Motor on board:

Top or back vented

Lighting:

3,75W Dimmable and dynamic

Led bar (2700 to 6500°K)

Control panel:

Touch Control 4 speeds + light switch + timer

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless Steel AISI430 and glass


Finishing:

Front panel in White or Black


glass with crystal transparent

edge

Back glass White

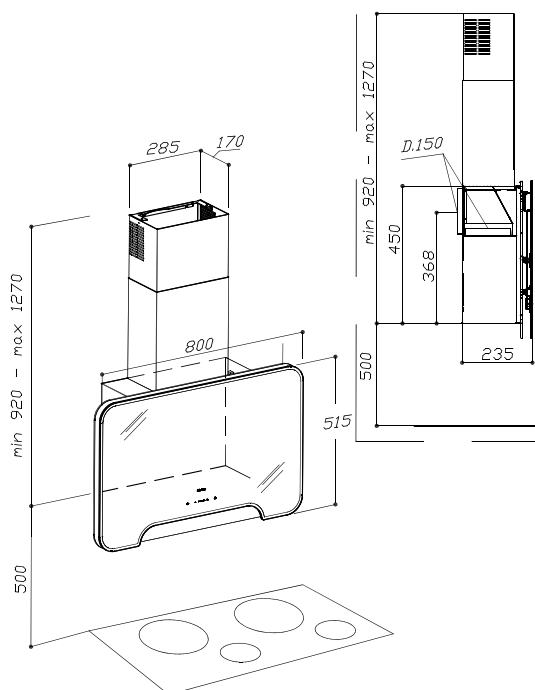

product dim. motor model identifier EEC
SLTC111 800 on-board P111080TC1240237 A



FLAT SLTC 111 Anti-drop

Motor on board:

Top or back vented

Lighting:

3,75W Dimmable and dynamic Led
bar (2700 to 6500°K)

Control panel:

Touch Control 4 speeds + light
switch + timer + Antidrop System

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Black matt painted stainless steel
and glass


Finishing:

Front panel in Black glass with
bronze edge



ANTI-DROP SYSTEM

product	dim.	motor	model identifier	EEC
SLTC111 ANT.	800	on-board	P111080TA1364422	A

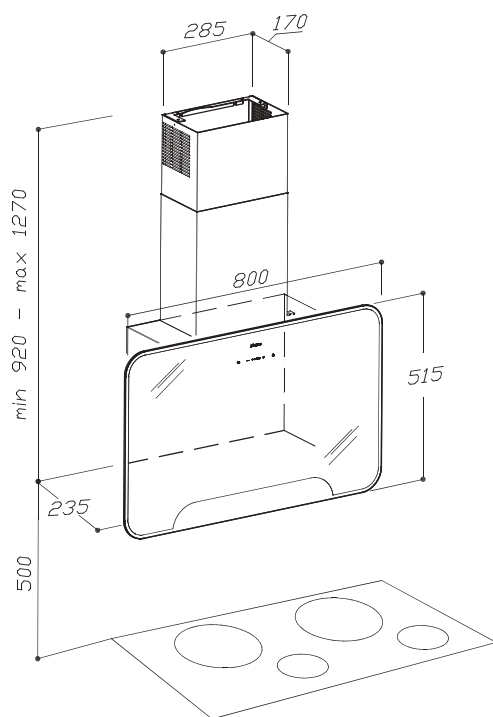



SLTC 119

Motor on board:

Top or back vented

Lighting:

3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Touch Control 4 speeds + light switch + timer

Filter:


Anodized aluminum (5+1 layers)

Material:

Stainless Steel AISI430


Finishing:

Inox / Black

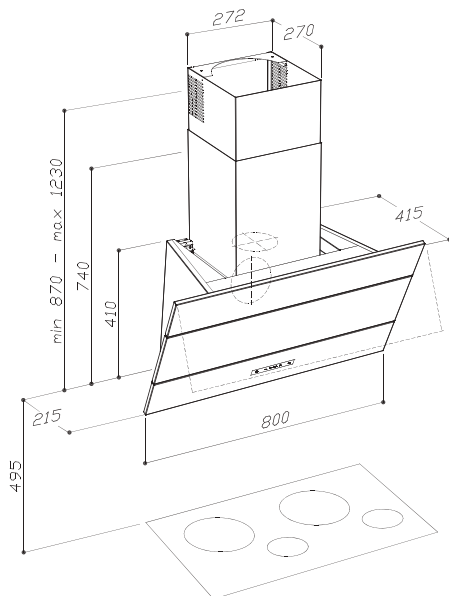

product	dim. motor	model identifier	EEC
SLTC119	800 on-board	P119080TC1284022 A	



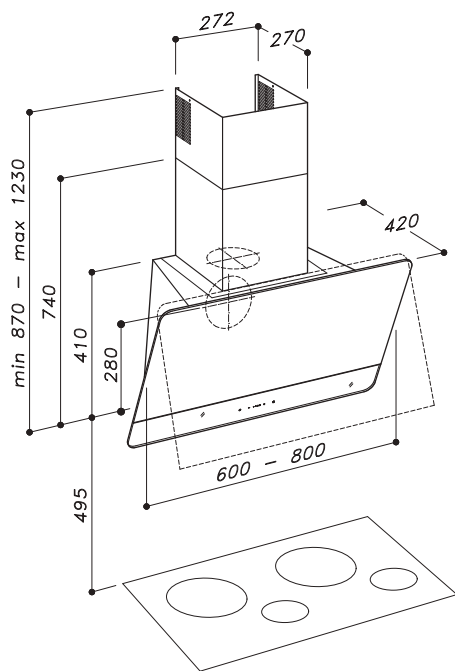

Motor on board:

Top or back vented

Lighting:

3,75W Dimmable and dynamic Led bar
(2700 to 6500°K)

Control panel:

Touch Control 4 speeds + light switch +
timer

Filter:

Anodized aluminum (5+1 layers)

Material:

Painted stainless Steel AISI430 and glass

Finishing:

Upper glass Gold or Black painted

product	dim. motor	model identifier	EEC
SLTC93	600 on-board	P093060TC1284022 A	
SLTC93	800 on-board	P093080TC1284022 A	

SKINNY SLTC 93



JEEG SLTC 97 S.A.M.S.



Available with S.A.M.S. System
see page 10



Motor on board:

Top or back vented

Lighting:

2 x 3,75W Dimmable and dynamic
Led bar (2700 to 6500°K)

Control panel:

Touch Control 4 speeds + light
switch + timer

Touch control 4 speeds+light
switch+timer+Air Management
System (SLTC97 S.A.M.S.)

Filter:


Stainless steel and anodized alumi-
num (5+1 layers)

Material:


Painted stainless steel and smoked
glass

Finishing:

Black, White

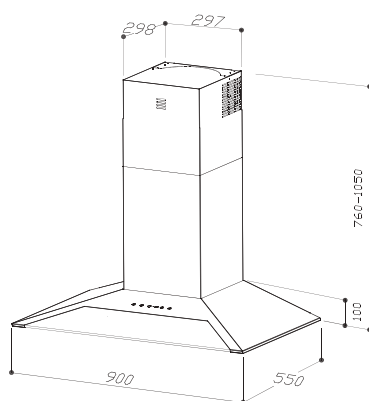

SLTC 97 S.A.M.S

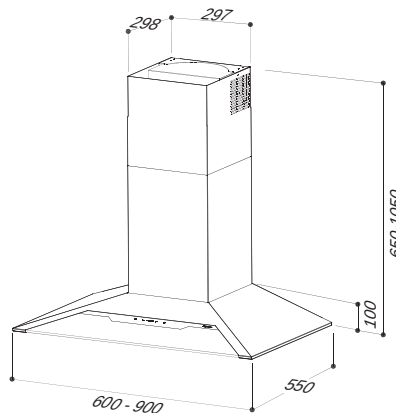


SLTC 97

product	dim.	motor	model identifier	EEC
SLTC97	600	on-board	P097060TC1284075	A
SLTC97	900	on-board	P097090TC1284002	A+

JEEG SLTC 97



SLTC 122

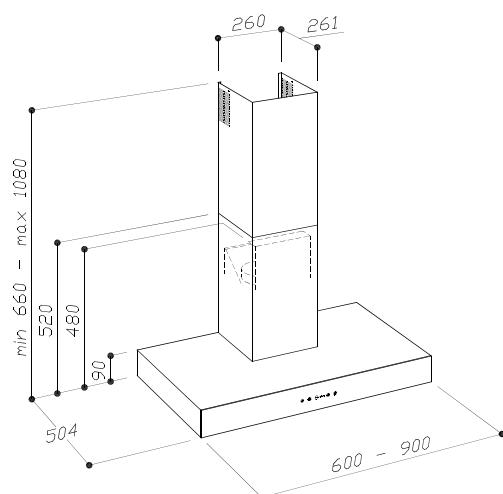

ANTI-DROP SYSTEM

Motor on board

Lighting:

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) 90cm version

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) 60cm version

Control panel:

Touch Control 4 speeds + light switch + timer + Antidrop System

Filter:

Anodized aluminum (5+1 layers)

Material:

Stainless Steel AISI430

Finishing:

Inox

Dark anthracite painted (PVD effect)


Dimension:

90cm

60cm



SLTC 92

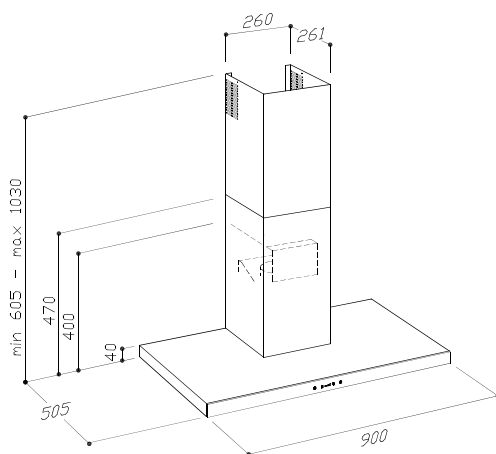

product dim. motor model identifier EEC
SLTC92 900 on-board P092090TC1284037 A

Motor on board

Lighting:

2x3,75W dimmable and dynamic
Led bar (2700 to 6500°K)

Control panel:

Touch Control 4 speeds + light
switch + timer

Grease filter:

Baffle filter AISI430


Material:

Stainless steel AISI 430 and glass

Finishing:

Black glass

SL 92

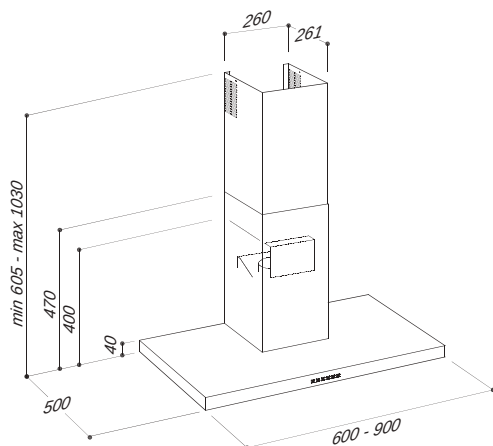

Motor on board

Lighting:

2x3,75W dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Chromed 4 speeds push-button+light switch+timer

Grease filter:

Baffle filter AISI430

Material:

Stainless steel AISI 430

product	dim.	motor	model identifier	EEC
SL92	600	on-board	P092060PB1284037	A
SL92	900	on-board	P092090PB1284037	A

SL107

Motor on board

Lighting:

2x3,75W dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Chromed 4 speeds push-button+light switch+timer (SL107 version)

Touch Control 4 speeds + light switch + timer (SLTC107 version)

Filter:

commercial style baffle filters


AISI304

with oil collector

Material:

Stainless steel AISI304 (SL107 version)

Staniless steel AISI430 and glass panel (SLTC107 version)

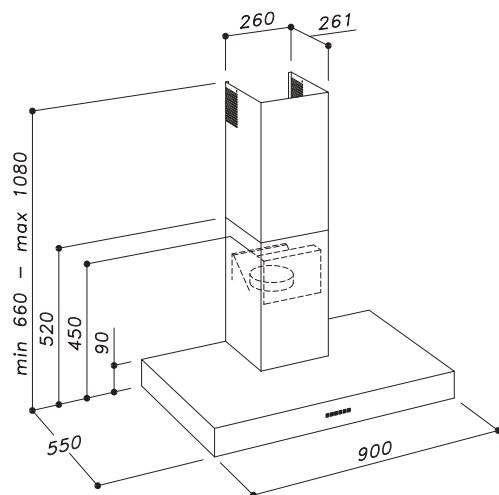


oil collector

product	dim.	motor	model identifier	EEC
SL107	900	on-board	P107090PB1280144	A+
SLTC107	900	on-board	P107090TC1284044	A+

SLTC 107



SLTC 90

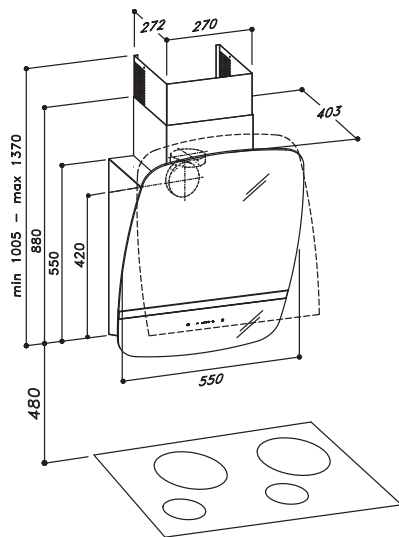

product dim. motor model identifier EEC
SLTC90 550 on-board P090055SL1020113 A

Motor on board:

Top or back vented

Lighting:

1x6,5W Led Strip

Control panel:

Touch Control 4 speeds + light switch + timer

Grease filter:

Anodized aluminum (5+1 layers)

Material:


Stainless steel AISI 430 and glass

Finishing:

White glass

Black glass

SLTC 91

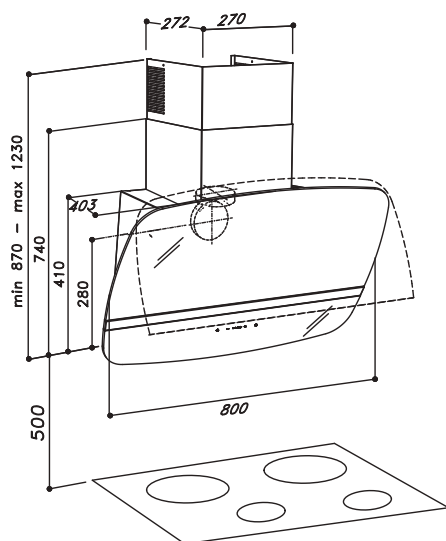

product dim. motor model identifier EEC
SLTC91 800 on-board P091080SL1020122 A

Motor on board:

Top or back vented

Lighting:

1x6,5W Led Strip

Control panel:

Touch Control 4 speeds + light switch
+ timer

Grease filter:

Anodized aluminum (5+1 layers)

Material:


Stainless steel AISI430 and glass

Finishing:

White glass

Black glass

SL109

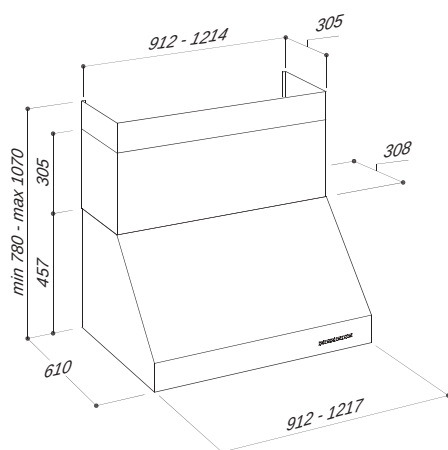

product	dim.	motor	model identifier	EEC
SL109	900	on-board	P109090PB1034044	A
SL109	1200	2 Mot on-board	P109120PB2034045	B

Motor on board

Lighting:

2x3,75W Dimmable and dynamic led bar (2700 to 6500°K)

Control Panel:

Chromed 4 speeds push-button+light switch+timer

Grease filter:

Commercial style baffle filters AISI304 with oil collector

Material:


Stainless steel AISI304

Finishing:

Stainless steel



Upper and lower chimneys to be purchased separately

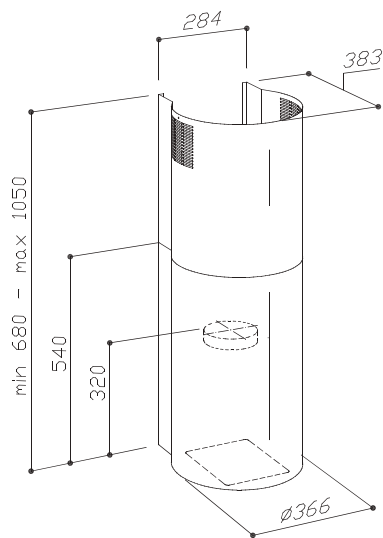

MO 209

Motor on board

Lighting:

2 Led spot 2,5W 4000°K

Control Panel:

Remote Control

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430


Finishing:

Stainless steel

Matt white painted

Matt black painted

product	dim.	motor	model identifier	EEC
MO209		on-board	P209037RC1283685	A

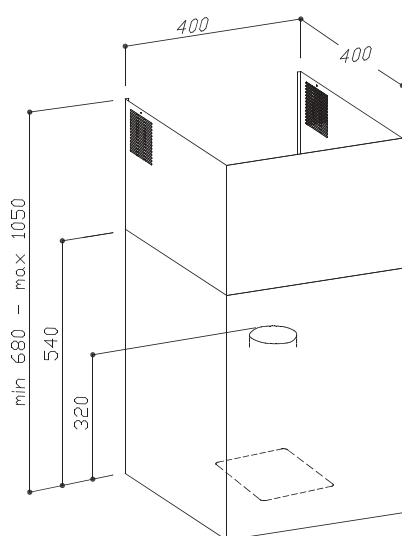

MO 210

Motor on board

Lighting:

2 Led spot 2,5W 4000°K

Control Panel:

Remote Control

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430

Finishing:

Stainless steel

Matt white painted

Matt black painted







BUILT-IN

Built-in hoods designed to be perfectly integrated into kitchen projects where you don't want to interrupt the continuity and design of the kitchen cabinets, guaranteeing maximum extraction efficiency.

SUPERHERO SL 930 AUTOMATIC



ARTIFICIAL INTELLIGENCE SYSTEM - AIS

This innovative system, patented by Sirius, is made up of sensors and technologically advanced electronic devices working in synergy.

As you start cooking, the range hood autonomously activates and adjusts the suction power, by detecting constantly both the temperature and air quality while cooking.

This innovative technology allows an autonomous and automatic operation of products and is completely independent from the kind of hob you use (gas, induction, etc.).



Motor on board

Lighting:

2X3,75W Dimmable and dynamic
Led bar (2700 to 6500°K)


Control panel:

Fully automatic operating system
Chromed 4 speeds push-button +
light switch +timer
App
Voice assistant
Filter:
Anodized aluminum (4+1 layers)
Finishing:
Matt white painted

Installation:

Cut Out:

Create a niche in the cabinet for
830x270mm

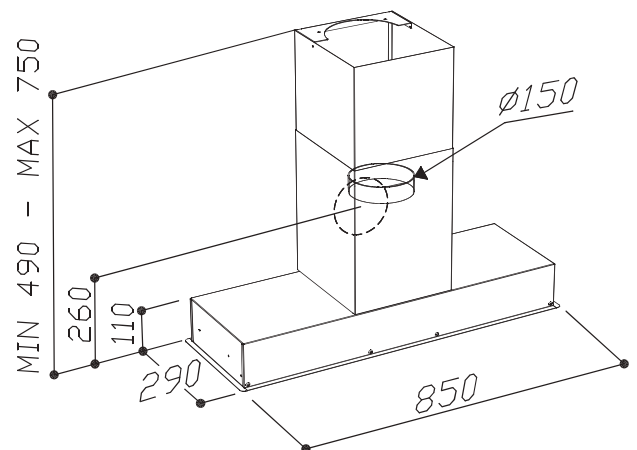

product dim. motor model identifier EEC
SLTC930 850 on-board G930085RA1284087 A

WING SLTC 919

Motor on board:

Top or back vented

Lighting:

1X6W Dimmable and dynamic Led bar (2700 to 6500°) (SLTC919 85cm version)

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (SLTC919 52cm version)

Control Panel:

Touch control 4 speeds+light switch+timer

Grease filter:

Anodized aluminum (5+1 layers)

Material:


Stainless steel AISI430 and glass

Installation:

Cut Out:

Create a niche in the cabinet for 498x265mm (52cm version)

828x265mm (85cm version)

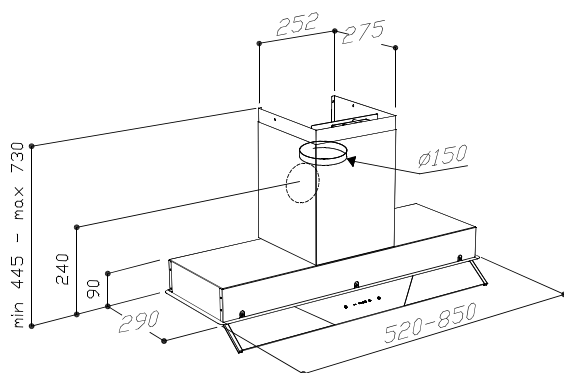


product	dim.	motor	model identifier	EEC
SLTC 919 520	on-board	G919T52TC	1284466	A
SLTC 919 850	on-board	G919T85TC	1284567	A





SL 906-L

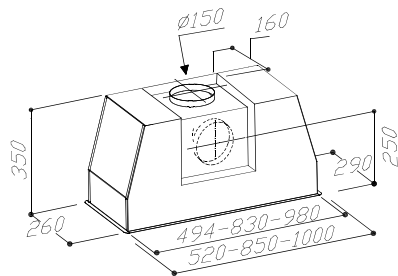

oil collector

product	dim.	motor	model identifier	EEC
SL 906-L	520	on-board	G906052PB1284052 A	
SL 906-L	850	on-board	G906085PB1284153 A	
SL 906-L	1000	on-board	G906100PB1282749 A	

Motor on board:

Top or back vented

Lighting:

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (52 cm version)

1x6W Dimmable and dynamic Led bar (2700 to 6500°K) (85 version)

2x3,75W Dimmable and dynamic Led bars (2700 to 6500°K) (100cm version)

Control Panel:

Chromed 4 speeds push-button+light switch+timer

Grease filter:

Commercial style baffle filters
AISI304 with oil collector

Material:

Stainless steel AISI430

Installation:

Cut Out:

Create a niche in the cabinet for



498x265mm (52cm version)

835x265mm (85cm version)

985x265mm (100cm version)



SL 909

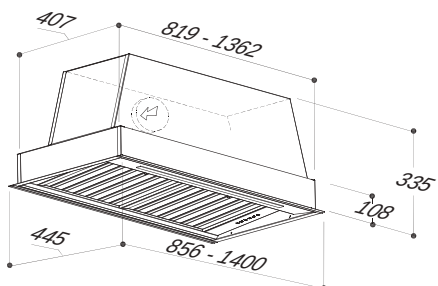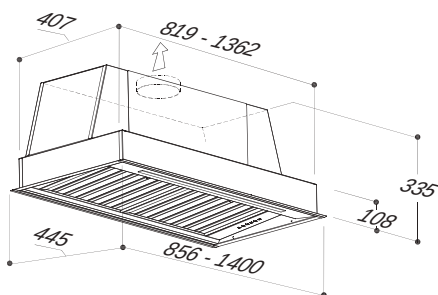

product	dim.	motor	model identifier	EEC
SL 909	856	on-board	G909086PB1284148	A
SL 909	1400	on-board	G909140PB1284048	A+

Motor on board:

Top or back vented

Lighting:

1X6W Dimmable and dynamic Led bar
(2700 to 6500°K) (85cm version)

2X3,75W Dimmable and dynamic Led
bar (2700 to 6500°K) (140cm version)

Control Panel:

Chromed 4 speeds push-button+light
switch+timer

Grease filter:

Commercial style baffle filters AISI304
with oil collector

Material:

Stainless steel AISI430



oil collector

Installation:

Cut Out:

Create a niche in the cabinet for

825x410mm (SL 909 85cm version)

1365x410mm (SL 909 140cm version)

SLTC 928



Motor on board:

Top or back vented

Lighting:

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (60 cm version)

1x6W Dimmable and dynamic Led bar (2700 to 6500°K) (90cm version)

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (120cm version)

Control Panel:


Touch control 4 speeds+light switch+timer

Grease filter:

Anodized aluminium (5+1layers)

Material:

Stainless steel AISI430

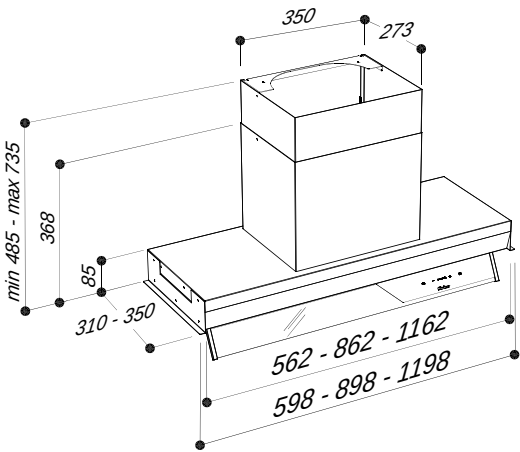

Easy installation:

No need to cut out

Directly installed in the cabinet through guides

product	dim.	motor	model identifier	EEC
SLTC 928	600	on-board	G928060TC1014066	A
SLTC 928	900	on-board	G928090TC1014084	A
SLTC 928	1200	on-board	G928120TC1014166	A





SL 927 ANTIDROP

Motor:

on board

Lighting:

1x3,75W Dimmable and dynamic
Led bar (2700 to 6500°K) (SL927
52cm)

1x6W Dimmable and dynamic
Led bar (2700 to 6500°K) (SL927
85cm)

Control Panel:

Chromed 4 speeds push-button
+ light switch + timer + Anti-drop
System

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Painted stainless steel and glass
panel

Finishing:

Black / White

Dimension: 52-85cm


Installation:

Cut Out:

Create a niche in the cabinet for

505x270mm (SM927 52cm version)

835x270mm (SM927 85cm version)

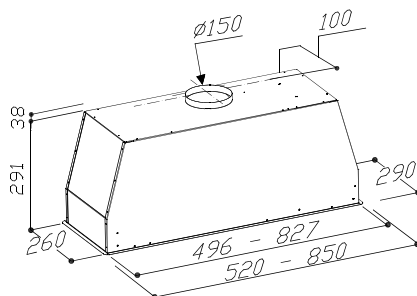

ANTI-DROP SYSTEM

product	dim.	motor	model identifier	EEC
SM927Ant.	520	on-board	G927052PB1014427	B
SM927Ant.	850	on-board	G927085PB1014578	A



SM 927

Motor:

on board

Lighting:

1x6,5W Led strip (SM927 52cm version)

1x10,5W Led strip (SM927 85cm version)

Control Panel:

4 speeds push-button+light switch

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Painted stainless steel and glass panel

Finishing:


Black / White

Installation:

Cut Out:


Create a niche in the cabinet for
505x270mm (SM927 52cm version)

835x270mm (SM927 85cm version)

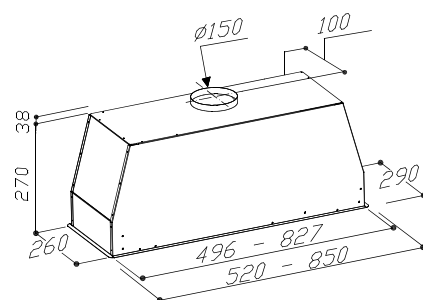



SL 913

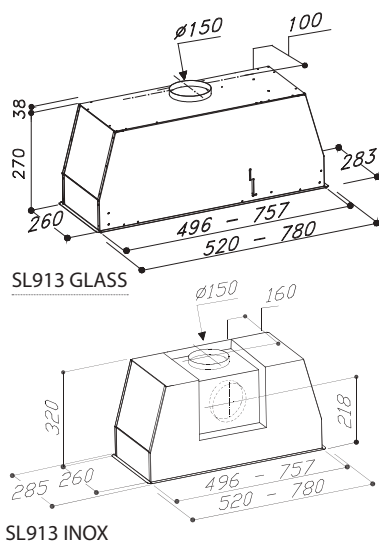

product	dim.	motor	model identifier	EEC
SL 913	520	on-board	G913052PB1284427	A
SL 913	780	on-board	G913078PB1284527	A

Motor on board

Lighting:

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (52 cm version)

1x6W Dimmable and dynamic Led bar (2700 to 6500°K) (78 cm version)

Control Panel:

Chromed 4 speeds push-button+light switch+timer

Grease filter:

Anodized aluminum (5+1layers)

Material:

Stainless steel

Glass

Finishing:

White painted and white glass panel (SL913 glass version)

Stainless steel (SL913 inox version)

Installation:


Cut Out:

Create a niche in the cabinet for 502x265mm (SL913 52cm version)

764x265mm (SL913 78cm version)



SL 903-P

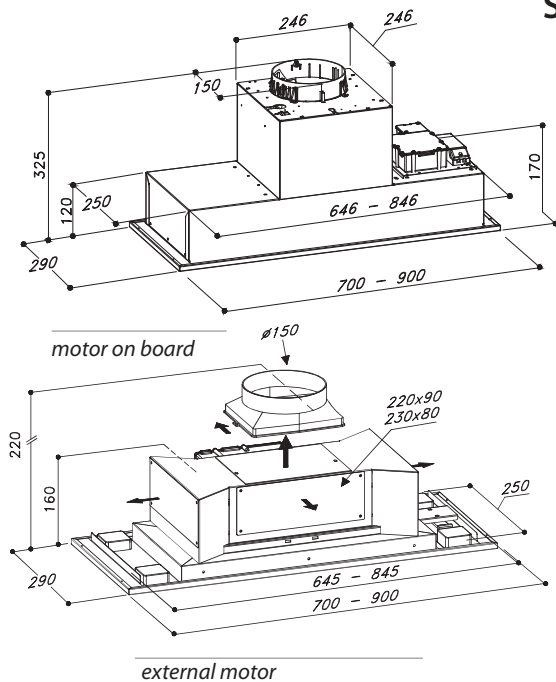

Motor:

motor on board or external motor
version (to be purchased separately)

Lighting:

4x2,1W Led spotlight

Control Panel:

Chromed 4 speeds push-
button+light switch+timer

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430

Installation:


Cut Out:

Create a niche in the cabinet for
649x255mm (SL903 70cm version)
849x255mm (SL903 90cm version)

product	dim.motor	model identifier	EEC
SL 903-P	700 on-board	G903070PB1280541	A
SL 903-P-EM	700 SEM1	G903070PB1290541	B
SL 903-P-EM	700 SEM2	G903070PB1150541	C
SL 903-P	900 on-board	G903090PB1280541	A
SL 903-P-EM	900 SEM1	G903090PB1290541	B
SL 903-P-EM	900 SEM2	G903090PB1150541	C



SM 923-L

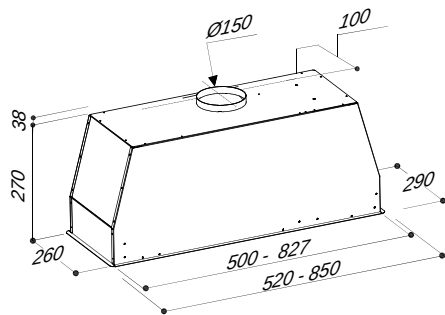

product	dim.	motor	model identifier	EEC
SM923-L 520	on-board		G923052PB1013580	A
SM923-L 850	on-board		G923085PB1013382	A

Motor:

on board

Lighting:

Led strip 1x6,5W (SM923 52cm version)

Led strip 1x10,5W (SM923 85cm version)

Control Panel:

4 speeds push-button+light switch+timer

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430

Installation:


Cut Out:

Create a niche in the cabinet for 270x505mm (SM923 52cm version)

270x835mm (SM923 85cm version)



SL - SM 900

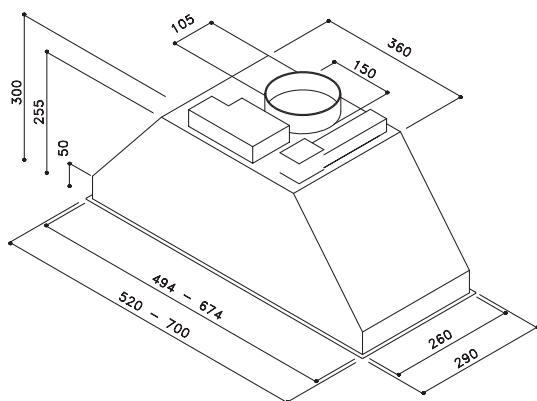

product	dim.	motor	model identifier	EEC
SM 900	520	on-board	G900052PB1010657	B
SM 900	700	on-board	G900070PB1010657	B
SL 900	520	on-board	G900052PB1280657	A
SL 900	700	on-board	G900070PB1280657	A

Motor on board

Lighting:

2x2,1W Led spotlight

Control Panel:

Chromed 4 speeds push-button+light switch+timer (SL version)

4 speed push-button+light switch+timer (SM version)

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430


Installation:

Cut Out:

Create a niche in the cabinet for
495x272mm (SL900 52cm version)
675x272mm (SL900 70cm version)



SL 907

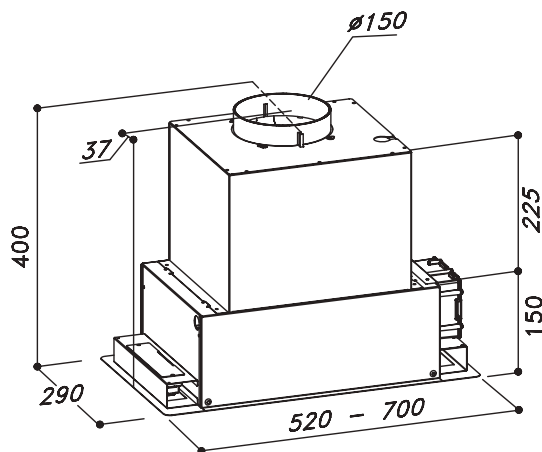

Motor on board

Lighting:

Led panel 1x4W (SL907 52cm version)

Led panel 1x11W (SL907 70cm version)

Control Panel:

Chromed 4 speeds push-button+light switch+timer

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430

Installation:

Cut Out:

Create a niche in the cabinet for
270x498mm (SL907 52cm version)

270x675mm (SL907 70cm version)






VENTED INDUCTION HOBS

The vented induction hobs are born from the perfect combination between an induction hob and an extractor hood. Sirius offers vented hobs with minimal designs and high technology and functionality in a single appliance.

DNA SDDH9



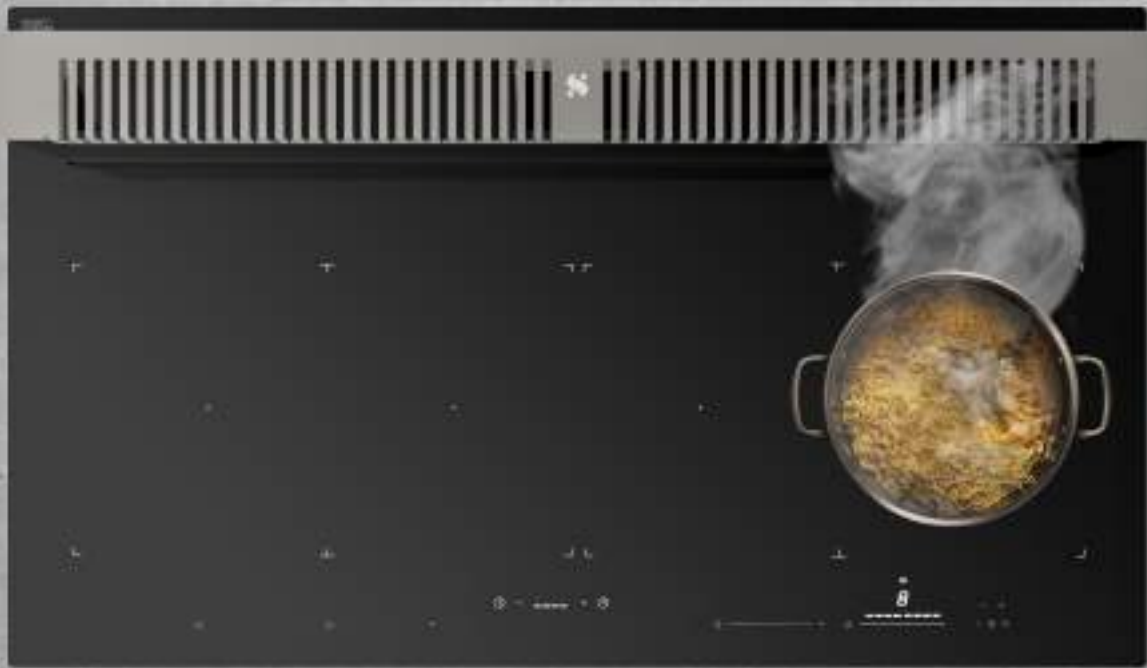

Motor:

Brushless Motor on board

Control panel:

Touch control 4 speeds + timer integrated on the induction hob (White led)

Filter:

Black aluminium filter

Finishing:

Stainless steel metallic grill

Hob Specifications

Ego G5 induction technology

Schott Ceran Luminoir black glass

White led Touch controls

Pot Detection

Residual Heat

Power Boost (quick heating) on all zones

Automatic Warm-Up

Special Programs:

- Warming

- Melt

- Simmer

Chef Cook

Timer

Egg Timer/Reminder

Child Safety Lock

Over-heating operation

"Keep Warm" function

Pause and recall functions


Bridge (Flexible cooking zones)

Cooking output

4 zones (Octa 180x220mm 2100W) Max 3700W

Max power 7,4 kW

Electric rating 220-240V (50/60 Hz)

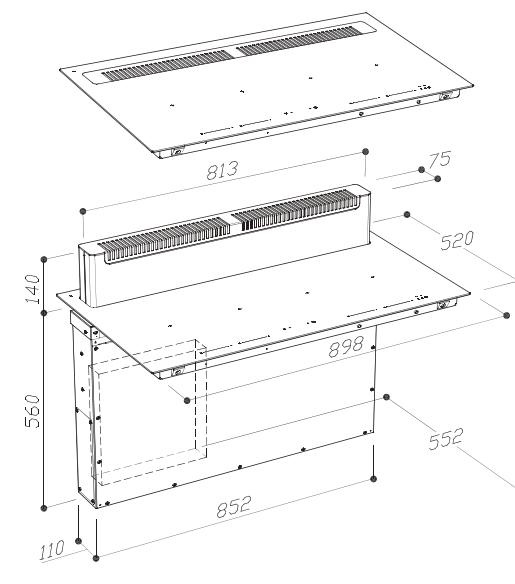

Installation

Cut Out:

Create a niche in the countertop using the following dimensions:
860x490mm

product
S-DDH9

dim.
900x520

motor
on board

model identifier
D009090TC141XX88

EEC
A+++

159



SYNTHESIS SDDH6 78 CM



Motor:

Flat Motor on board

Control panel:

Touch control 4 speeds + timer integrated on the induction hob (White led)

Material:

Black painted metallic grill

Hob Specifications

Ego G5 induction technology

Schott Ceran Luminoir black glass

White led Touch controls

Pot Detection

Power Boost (quick heating) on all zones

Automatic Warm-Up

Special Programs:

- Warming

- Melt

- Simmer

Chef Cook

Timer

Egg Timer/Reminder

Child Safety Lock

Over-heating operation

"Keep Warm" function

Pause and recall functions




Bridge (Flexible cooking zones)

Cooking output

4 zones (Octa 180x220mm 2100W) Max 3700W

Max power 7,4 kW

Electric rating 220-240V (50/60 Hz)

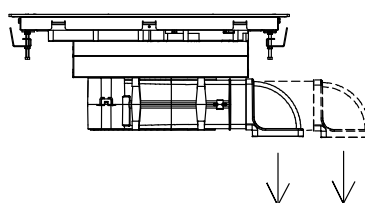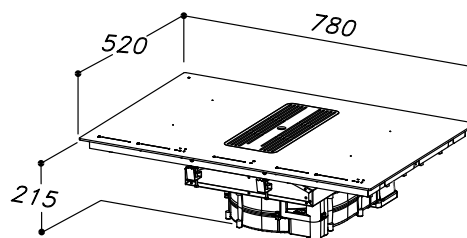

product
SDDH6 BRH

motor
on board

model identifier
D006078TC135XX79

EEC
A+

Installation

Cut Out:

Create a niche in the countertop using the following dimensions:
760x490mm



SYNTHESIS SDDH6 60 CM



Motor:

Flat Motor on board

Control panel:

Touch control 4 speeds + timer integrated on the induction hob (White led)

Material:

Black ceramic glass

Black painted metallic grill

Hob Specifications

Ego B4 induction technology

Schott Ceran Luminoir black glass

White led Touch controls

Automatic switch off

Residual Heat Indication

Overheating

Supervision for permanent key activation

Pause-Recall function key

Key-lock function

Timer function

Warming function

Stand-alone timer function

Child Lock

Heat-Up Automatic



Bridge function

Booster function on all zones

4 zones (Octa 210x190 2100W) Max 3000W

Max power 7,4 kW

Electric rating 220-240V (50/60 Hz)

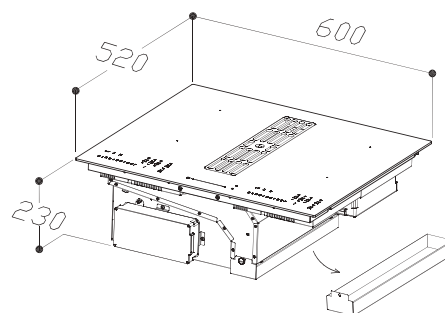

product

S-DDH6

dim.

600x520

motor

on board

model identifier

D006060TC142XX89

EEC

B

Installation

Cut Out:

Create a niche in the countertop using the following dimensions: 560x490mm

SENSE



Lighting

1x1,4W Dimmable and dynamic
Led spot (2700K to 6500K)

Material


Ceramic

Finishing

Ceramic Shell: Handmade
ceramic black or white matt
painted

Inside the ceramic lamp SENSE,
the technological system
patented by Sirius.

This can match the Synthesis
vented induction hob, assuring
both a proper lighting and
the maximum energy comfort.
The sensors and electronically
advanced devices
detect air quality and the
temperature produced
while cooking, automatically
activating the suction of
the vented induction hob.

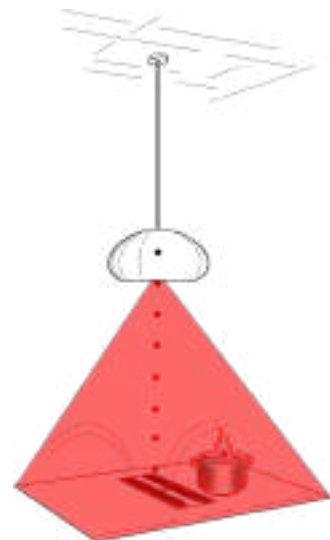



SHADOW SDDH5





Motor:

Brushless Motor on board

Control panel:

Touch control 4 speeds + timer integrated on the induction hob (White led)

Filter:

Black aluminium filter

Material

Schott Ceran Luminoir black glass

Hob Specifications

Ego G5 induction technology

Schott Ceran Luminoir black glass

White led Touch controls

Pot Detection

Residual Heat

Power Boost (quick heating) on all zones

Automatic Warm-Up

Special Programs:

- Warming

- Melt

- Simmer

Chef Cook

Timer

Egg Timer/Reminder

Child Safety Lock

Over-heating operation

"Keep Warm" function

Pause and recall functions




Bridge (Flexible cooking zones)

Cooking output

4 zones (Octa 180x220mm 2100W) Max 3700W

Max power 7,4 kW

Electric rating 220-240V (50/60 Hz)

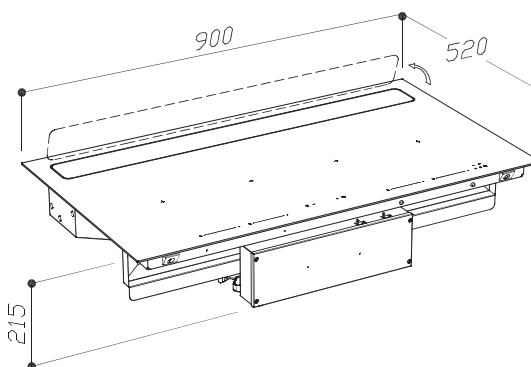

product
SDDH5 BRH

motor
on board

model identifier
D005090TC135XXXX

EEC
A+

Installation

Cut Out:

Create a niche in the countertop using the following dimensions: 860x490mm

SDDH 1



Motor:

motor on board or external motor version (to be purchased separately)

Lighting:

1x5 W LED strip

Control panel:

Touch Control 4 speeds+light switch+timer integrated on the Induction Hob

Filter:

anodized aluminum (4+1 layers)

Material:

Stainless steel

Hob Specifications

Induction G5

Beveled edges black glass

Automatic heat-up function

Safety Lock

Timer function

Over-heating operation

"Keep Warm" function

Pause and recall function

Bridge function

Touch controls

Booster function on all zones

Cooking output


4 zones 184x220mm 2100W; Power 3700W

Max power 7,4 kW


Electric rating 220-240V (50/60 Hz)

Cut out:

Create a niche in the countertop using the following dimensions: 860x490mm

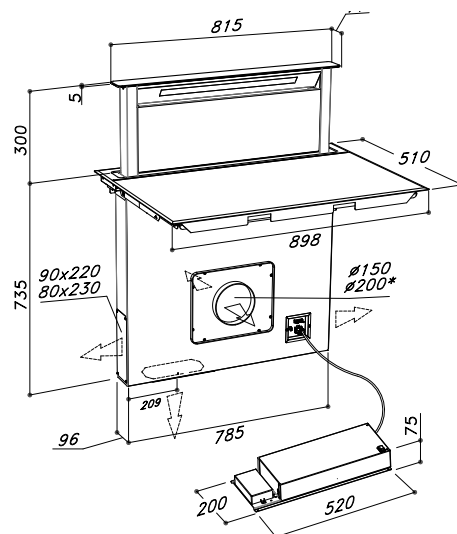

External Motor

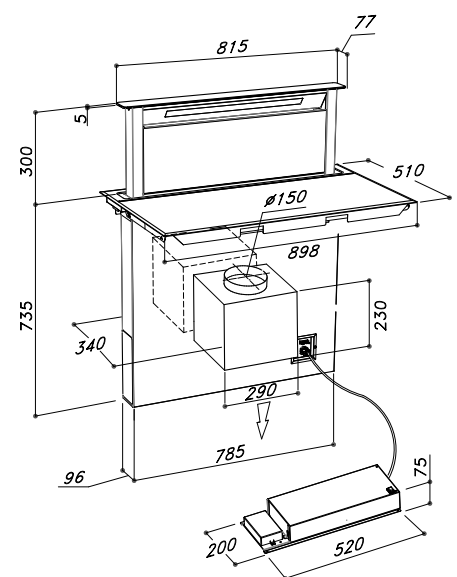


Motor on board


product	dim.	motor	model identifier	EEC
S-DDH1	900x510	on board	D009088TC1292415	A
S-DDH1 EM	900x510	SEM1	D009088TC1142415	B
S-DDH1 EM	900x510	SEM 2	D009088TC1152415	C
S-DDH1 EM	900x510	SEM 8	D009088TC1172415	C
S-DDH1 EM	900x510	SEM 10	D009088PB1302415	C
S-DDH1 EM	900x510	SEM 12	D002088PB1312415	A

INSTALLATION SCHEMES



SYNTHESIS SDDH 6

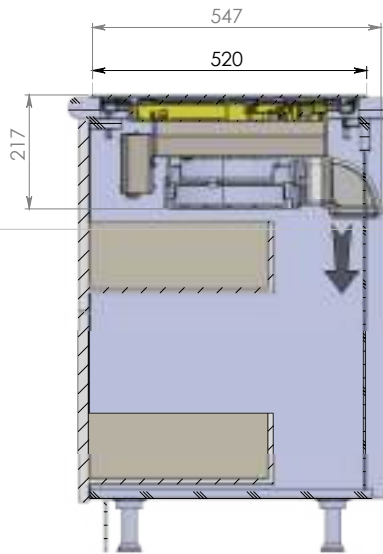


DUCTING VERSION

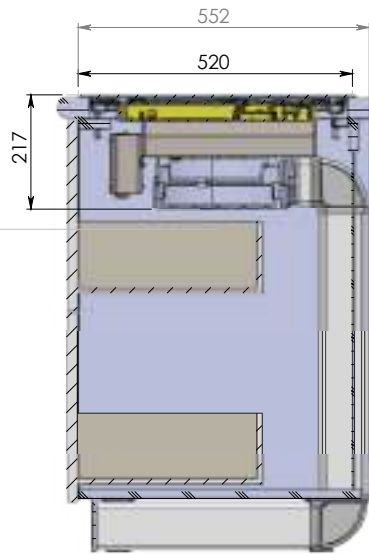


FILTERING VERSION

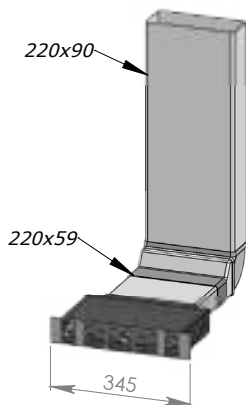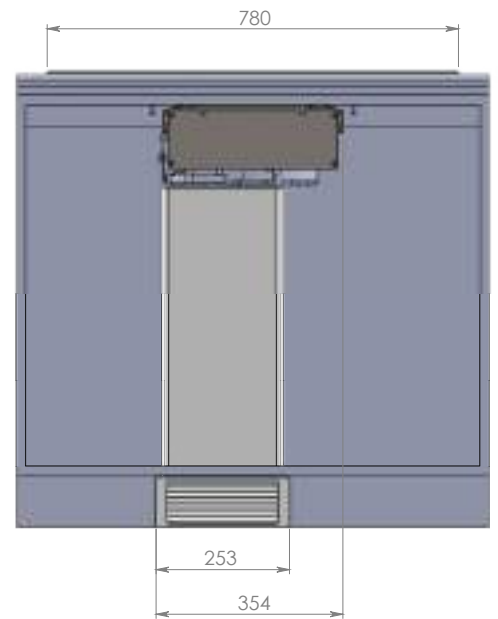


"FILTERING VERSION
WITH S-KFHE3"
(To be purchased
separately, see p. 186)




FILTERING KIT
SDDH6 BRHM
(To be purchased
separately)




SHADOW SDDH 5

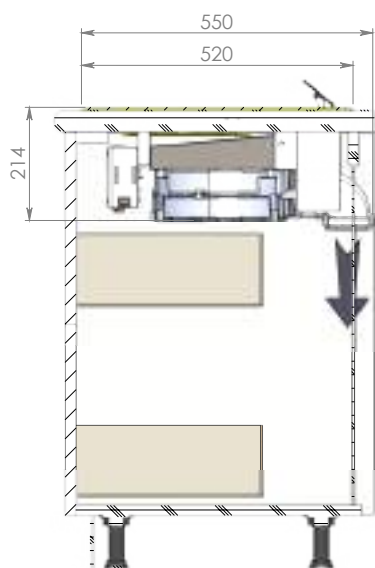


DUCTING VERSION

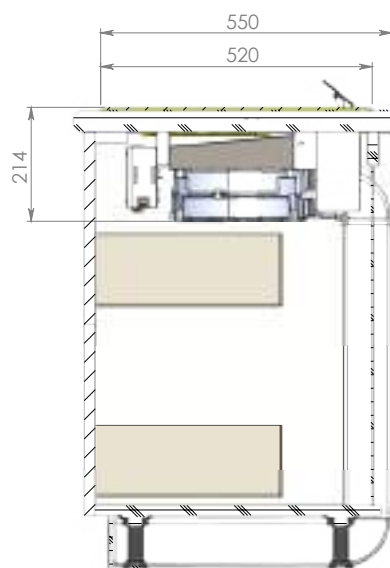

FILTERING VERSION



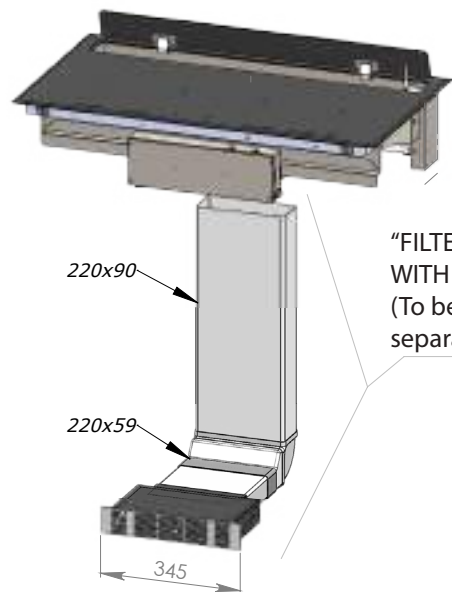


"FILTERING VERSION
WITH S-KFHE3"
(To be purchased
separately)




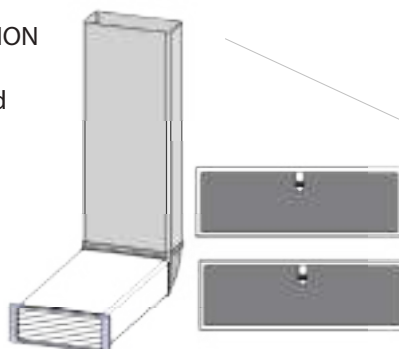






FILTERING KIT
SDDH5 BRHM
(To be purchased
separately)

SDDH 1 + SEM 10 / SEM 12

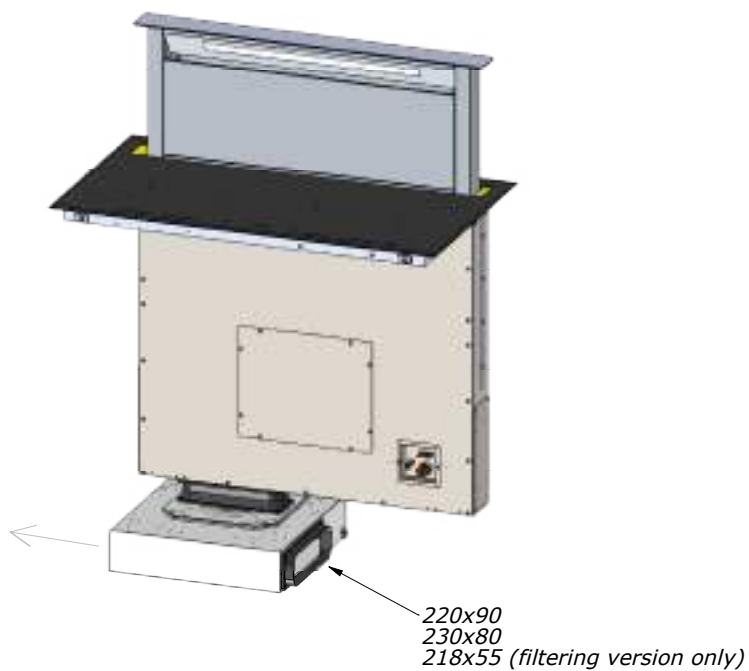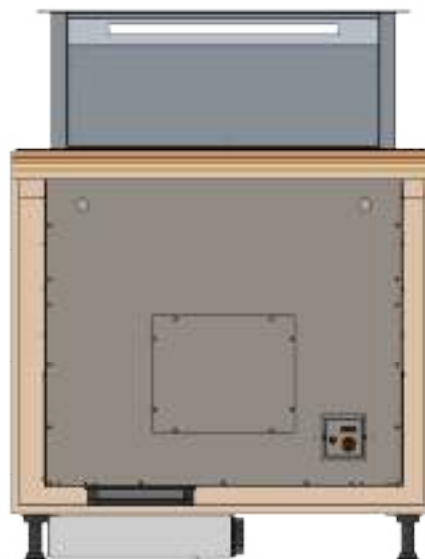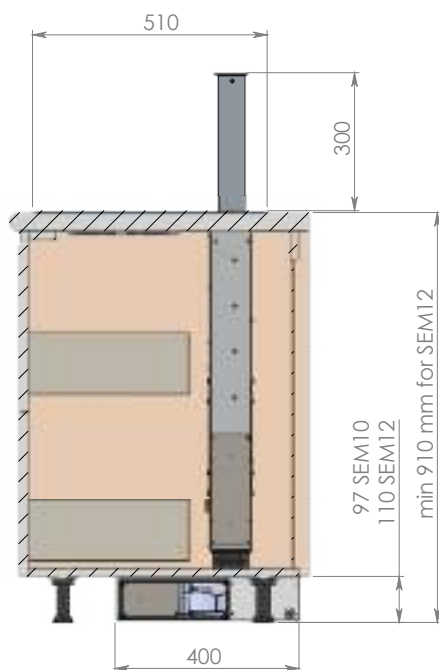

REMOTE MOTORS

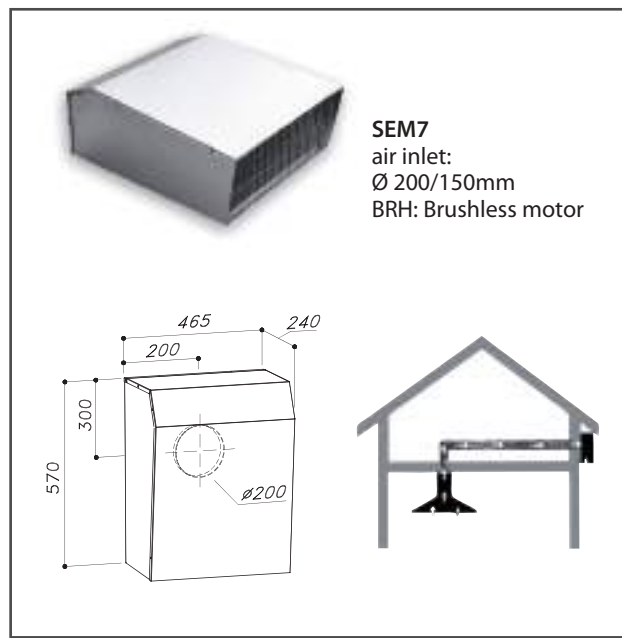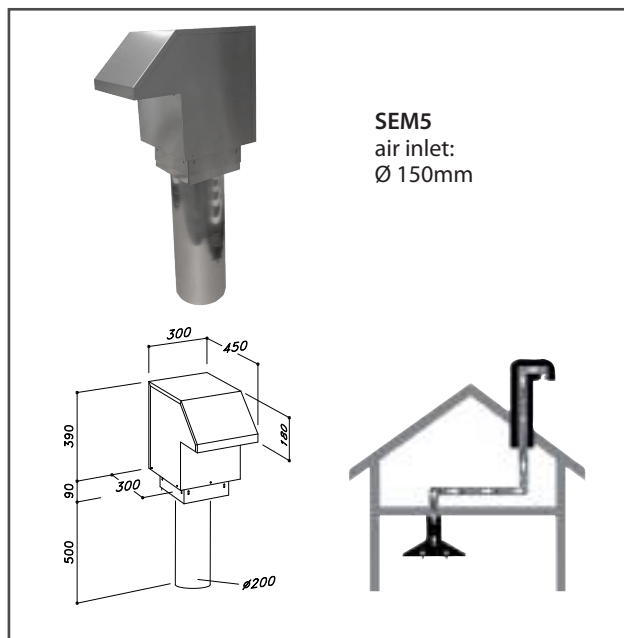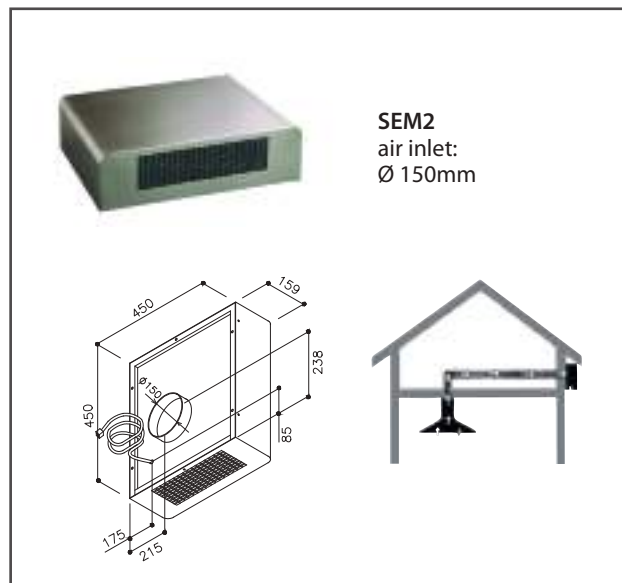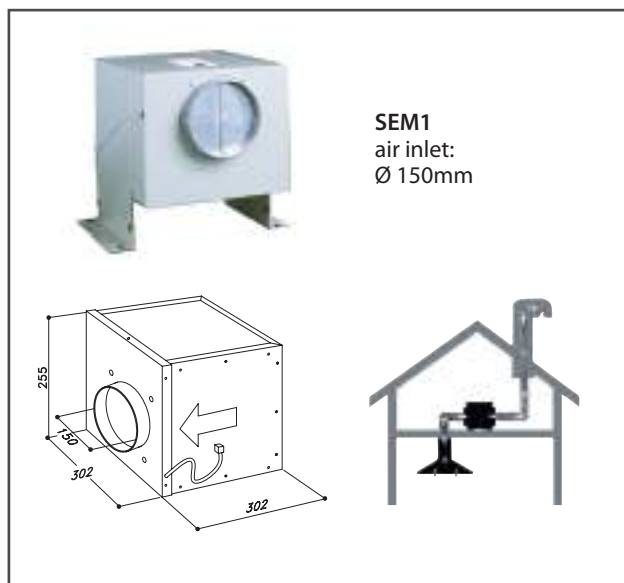

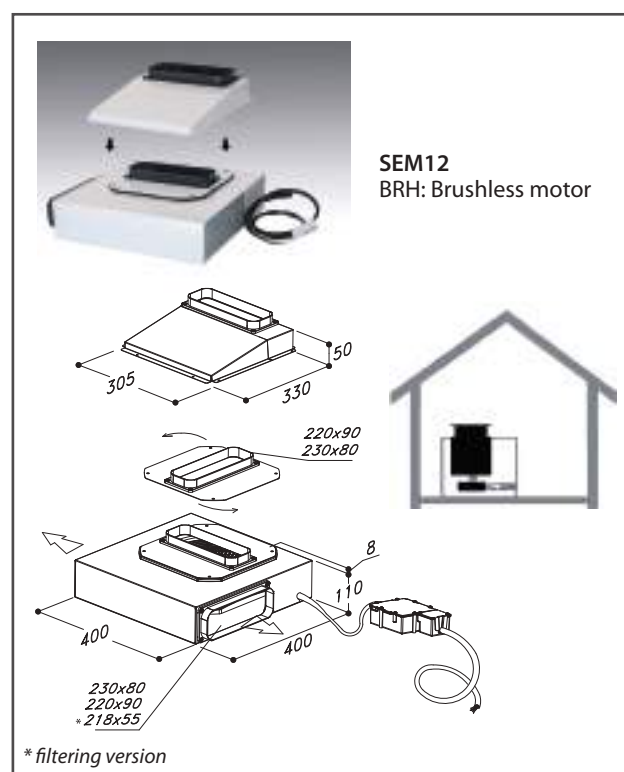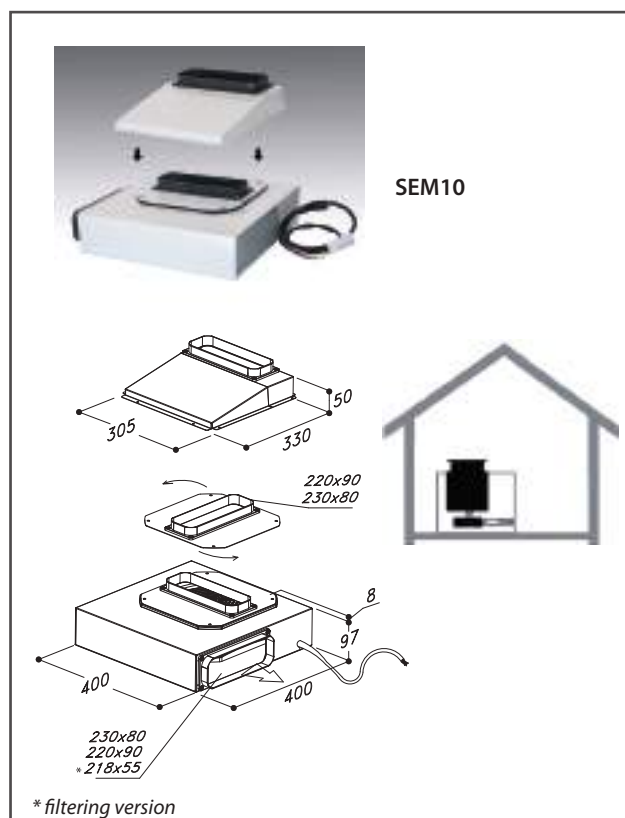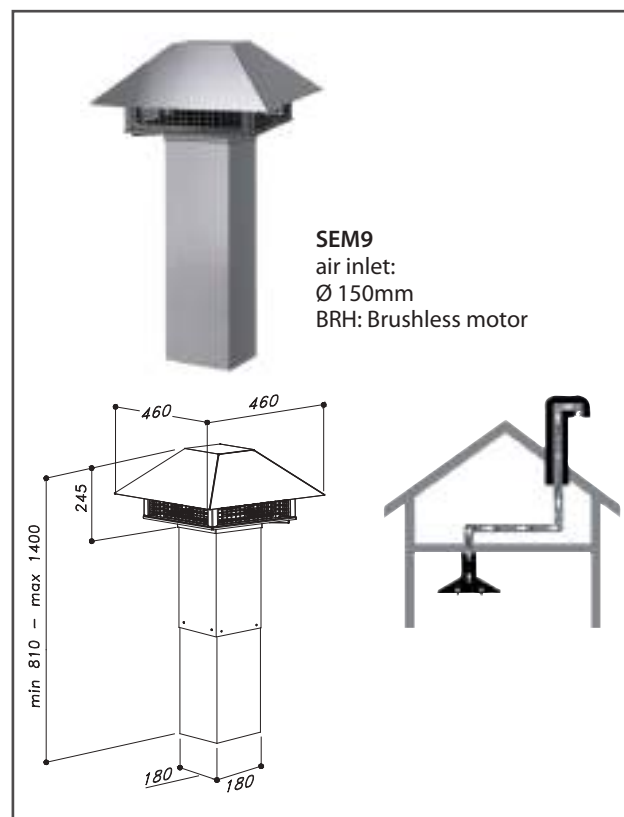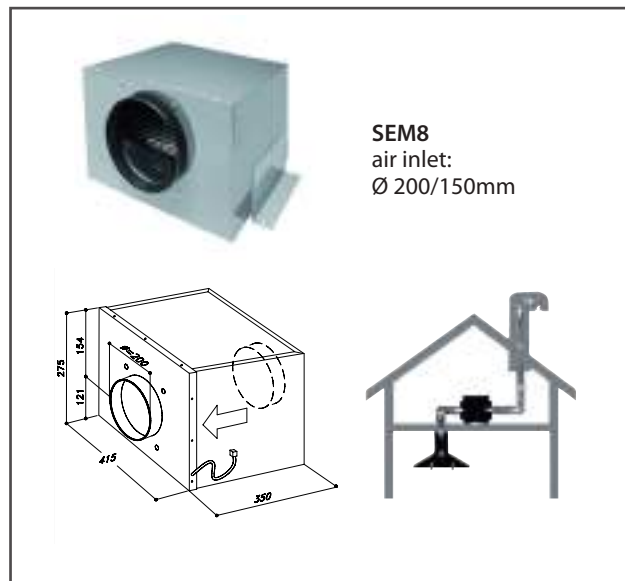

Have you ever thought about an oven hood?
This is the Sirius solution for removing odors during cooking
and annoying vapors generated by opening the oven.



AEOLUS



Motor on board

Touch Control 2 speeds, timer function, automatic stop

Filter:

Filtering box composed of:

Black painted Anodized aluminum


Washable carbon filter

Zeolite filter

Finishing:

Matt black painted

Black glass front panel

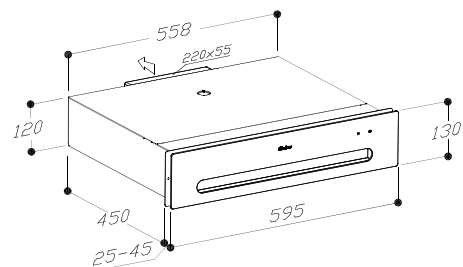

Installation:

Prepare a niche above the oven measuring 560x120mm

Filtering version only





INDUCTION HOBS

INVISIBLE INDUCTION HOBS

S-H7



S-H7 4 zones in line

Ego B4 induction technology
Slider control Smart Kii (Red led)
Booster function
Residual heat indication
Timer function
Stand alone Timer / Cooking zone Timers
Heat-up Automatic
Chef Cook Function
Pause function
Recall function
Control Lock key
Child Lock key
Warming level
Power management
Power settings
Operation Time Limitation
4 zones in line Ø200mm
9 Power Level:1.6 kW
Booster: 1.7 kW
Max power: 6.4 kW


S-H7 5 zones 82x48cm

Ego B4 induction technology
Slider control Smart Kii (Red led)
Booster function
Residual heat indication
Timer function
Stand alone Timer / Cooking zone Timers
Heat-up Automatic
Chef Cook Function
Recall function
Control Lock key
Child Lock key
Warming level
Power management
Power settings
Operation Time Limitation
2 zones Ø200mm - 9 Power Level:1.6 kW/Booster: 1.7 kW
2 zones Ø160mm - 9 Power Level: 1.1 kW/Booster: 1.5 kW
1 zone Ø250 - 9 Power Level:1.8 kW/Booster: 2.4 kW
Max power: 7.2 kW


S-H7 4 zones 64x48cm

Ego B4 induction technology
Slider control Smart Kii (Red led)
Booster function
Residual heat indication
Timer function
Stand alone Timer / Cooking zone Timers
Heat-up Automatic
Pause function
Recall function
Control Lock key
Child Lock key
Warming level
Power management
Power settings
Operation Time Limitation
2 zones Ø200mm - 9 Power Level:1.6 kW/Booster: 1.7 kW
2 zones Ø160mm - 9 Power Level: 1.1 kW/Booster: 1.5 kW
Max power: 5.4 kW


S-H7 4 zones in line

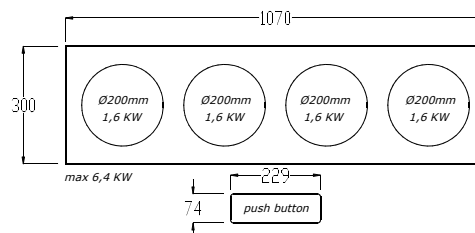

S-H7 4 zones 64x48cm

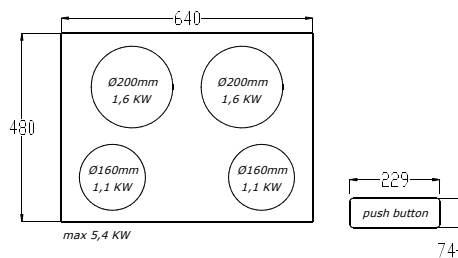

S-H7 5 zones 82x48cm

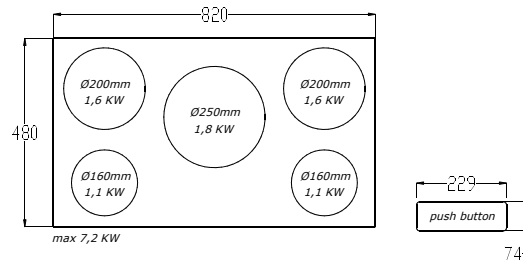

INDUCTION HOBS

SH8 cm 60



580 cm

Ego B4 induction technology
Schott Ceran Luminoir black glass
Slider control Smart Kii (White led)
Cooking timer
Stand alone timer
Booster
Pause
Recall
automatic Pot detection
Keep warm
Child lock
Key lock
Residual heat display
Automatic heat up
Bridge
Cooking zone: 4
510 cm Octa 190 x 210 mm (2,1 / 3 kW)
Octa 190 x 210 mm (2,1 / 3 kW)
Round 200 mm (2,3 / 3 kW)
Round 160 mm (1,4 / 2,1 kW)
Max power 7400W
Power supply:
220-240 / 380-415 ; 50-60 Hz

Hob Size (mm)

580x510

Cut out (mm)

560x490





Ego B4 induction technology
 Schott Ceran Luminoir black glass
 Slider control Smart Kii (White led)
 Cooking timer
 Stand alone timer
 Booster
 Pause
 Recall
 automatic Pot detection
 Keep warm
 Child lock
 Key lock
 Residual heat display
 Automatic heat up
 Bridge
 Cooking zone: 4
 Octa 190 x 210 mm (2,1 / 3 kW)
 Octa 190 x 210 mm (2,1 / 3 kW)
 Round 250 mm (2,3 / 3 kW)
 Round 200 mm (2,3 / 3 kW)
 Max power 7400W
 Power supply:
 220-240 / 380-415 ; 50-60 Hz

SH8 cm 78



510 cm


780 cm

Hob Size (mm)

780x510

Cut out (mm)

750x490

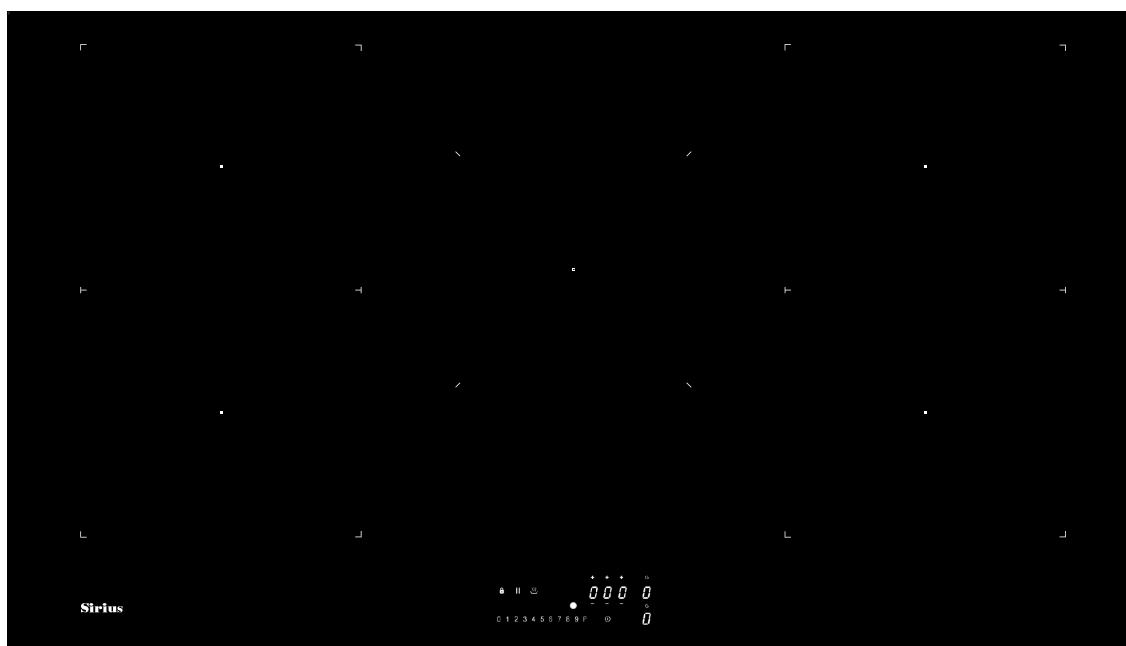

510 cm

SH8 cm 90

900 cm



S-H8 cm90


Ego B4 induction technology
Schott Ceran Luminair black glass
Slider control Smart Kii (White led)
Cooking timer
Stand alone timer
Booster
Pause
Recall
automatic Pot detection
Keep warm
Child lock
Key lock
Residual heat display
Automatic heat up
Bridge
Cooking zone: 5
Octa 190 x 210 mm (2,1 / 3 kW)
Octa 190 x 210 mm (2,1 / 3 kW)
Round 250 mm (2,3 / 3 kW)
Octa 190 x 210 mm (2,1 / 3 kW) Bridge
Octa 190 x 210 mm (2,1 / 3 kW) Bridge
Max power 10400W
Power supply:
220-240 / 380-415 ; 50-60 Hz

Hob Size (mm)



900x510

Cut out (mm)



860x490




S-KFHE2
HIGH EFFICIENCY
FILTERING KIT
FOR KITCHEN PLINT MIN. 100mm HEIGHT

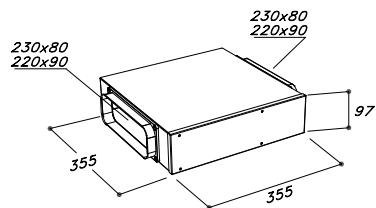


S-KFHE3
HIGH EFFICIENCY
FILTERING KIT
FOR KITCHEN PLINT MIN. 60mm
HEIGHT




KF
Charcoal filters for
use with df when
recirculating




LBR
Stainless steel
baffle filter-
optional upgrade



DF
(AIR DEVIATOR FOR
USE WITH KF WHEN
RECIRCULATING)



S-DF2**
AIR DEVIATOR FOR USE
WITH CEILING HOODS
WHEN RECIRCULATING
BUILT-IN VERSION
The air deviator needs
to be installed at a
minimum distance
of 1500mm from the
extractor



**ISLAND
FIXING
SYSTEM**
PATENTED

* Optional bracket kit
** Cut out: create a niche of 502mm x 202mm
whose minimum height to be reached is 220mm.

ENERGY LABEL DATA

DOWNDRAFT

Product name	Dimension	Motor	Model identifier	Energy efficiency class	Annual Energy Consumption	Fluid Dynamic Efficiency	Light Efficiency Class	Grease Filtering Efficiency Class	Weighted Sound Power Emission at maximum speed	Air Flow at intensive / boost setting	Lighting
SDD2 - L EM 580 F (L2D)	580	on-board	D001054P6C190018	B	50,6	A	A	E	68	656	1x6,5
SDD2 - L EM 580 F (L2D)	580	SEM1	D001054P6C190018	B	49,4	B	A	E	66	595	1x6,5
SDD2 - L EM 580 F (L2D)	580	SEM2	D001054P6C190018	C	87,8	C	A	E	68	577	1x6,5
SDD2 - L EM 580 F (L2D)	580	SEM8	D001054P6C190018	C	105,8	C	A	E	78	623	1x6,5
SDD2 - L EM 580 F (L2D)	580	SEM10	D001054P6C190018	C	57	C	A	E	67	478	1x6,5
SDD2 - L 880 (L2D) B	875	on-board	D001088P6C182415	A	54,5	A	A	E	68	757	1x5
SDD2-EM-L 880 (L2D) B	875	SEM1	D001088P6C182415	B	54,5	A	A	E	58	683	1x5
SDD2-EM-L 880 (L2D) B	875	SEM2	D001088P6C182415	C	83,8	C	A	E	62	731	1x5
SDD2-EM-L 880 (L2D) B	875	SEM7 2000	D001088P6C182415	A+	109,1	A	A	F	72	1142	1x5
SDD2-EM-L 880 (L2D) B	875	SEM7 2000	D001088P6C182415	A+	122,9	A	A	F	78	1238	1x5
SDD2-EM-L 880 (L2D) B	875	SEM8	D001088P6C182415	C	182,6	B	A	F	64	753	1x5
SDD2-EM-L 880 (L2D) B	875	SEM10	D001088P6C182415	C	54,3	C	A	E	67	530	1x5
SDD2-EM-L 880 (L2D) B	875	SEM12	D001088P6C182415	A	58	A	A	E	68	688	1x5
SDD2-L 1200 (L2D) B	1175	on-board	D002118P6C182717	A	51,9	A	A	E	68	791	1x9
SDD2-L EM 1200 (L2D) B	1175	SEM1	D002118P6C182717	B	49,8	A	A	E	55	736	1x9
SDD2-L EM 1200 (L2D) B	1175	SEM2	D002118P6C182717	C	90,7	B	A	E	57	738	1x9
SDD2-L EM 1200 (L2D) B	1175	SEM8	D002118P6C182717	B	98,5	B	A	F	60	807	1x9
SDD2-L EM 1200 (L2D) B	1175	SEM10	D002118P6C182717	C	58,3	C	A	E	59	559	1x9
SDD2 - L EM 540 TC (L2D)	580	on-board	D002048TC1180C18	B	40,8	A	A	E	68	606	1x6,5
SDD2 - L EM 540 TC (L2D)	580	SEM1	D002048TC1180C18	B	40,4	B	A	E	68	595	1x6,5
SDD2 - L EM 540 TC (L2D)	580	SEM2	D002048TC1180C18	C	87,8	C	A	E	68	577	1x6,5
SDD2 - L EM 540 TC (L2D)	580	SEM8	D002048TC1180C18	C	105,8	C	A	E	78	623	1x6,5
SDD2 - L EM 540 TC (L2D)	580	SEM10	D002048TC1180C18	C	57	C	A	E	67	478	1x6,5
SDD2-L 880 (L2D) TC	875	on-board	D002088TC1183415	A	44,3	A	A	E	68	757	1x5
SDD2-EM-L 880 (L2D) TC	875	SEM1	D002088TC1183415	B	54,3	A	A	E	58	683	1x5
SDD2-EM-L 880 (L2D) TC	875	SEM2	D002088TC1183415	C	83,8	C	A	E	62	731	1x5
SDD2-EM-L 880 (L2D) TC	875	SEM7 2000	D002088TC1183415	A+	109,1	A	A	F	72	1142	1x5
SDD2-EM-L 880 (L2D) TC	875	SEM7 2000	D002088TC1183415	A+	122,9	A	A	F	78	1238	1x5
SDD2-EM-L 880 (L2D) TC	875	SEM8	D002088TC1183415	C	182,6	B	A	F	64	753	1x5
SDD2-EM-L 880 (L2D) TC	875	SEM10	D002088TC1183415	C	54,3	C	A	E	67	530	1x5
SDD2-EM-L 880 (L2D) TC	875	SEM12	D002088TC1183415	A	58	A	A	E	68	688	1x5
SDD2-L 1200 (L2D) TC	1175	on-board	D002118TC1182717	A	51,9	A	A	E	68	791	1x9
SDD2-L EM 1200 (L2D) TC	1175	SEM1	D002118TC1182717	B	49,8	A	A	E	55	736	1x9
SDD2-L EM 1200 (L2D) TC	1175	SEM2	D002118TC1182717	C	90,7	B	A	E	57	738	1x9
SDD2-L EM 1200 (L2D) TC	1175	SEM8	D002118TC1182717	B	98,5	B	A	F	60	807	1x9
SDD2-L EM 1200 (L2D) TC	1175	SEM10	D002118TC1182717	C	58,3	C	A	E	59	559	1x9
STONE	835	on-board	D002088P6C182415	A	44,3	A	A	E	68	757	1x5
STONE EM	835	SEM1	D002088P6C182415	B	54,3	A	A	E	58	683	1x5
STONE EM	835	SEM2	D002088P6C182415	C	83,8	C	A	E	62	731	1x5
STONE EM	835	SEM8	D002088P6C182415	C	182,6	B	A	F	64	753	1x5
STONE EM	835	SEM10	D002088P6C182415	C	54,3	C	A	E	67	530	1x5
STONE EM	835	SEM12	D002088P6C182415	A	58	A	A	E	68	688	1x5
STONE	1135	on-board	D002118P6C182717	A	51,9	A	A	E	68	791	1x9
STONE EM	1135	SEM1	D002118P6C182717	B	49,9	A	A	E	55	736	1x9
STONE EM	1135	SEM2	D002118P6C182717	C	90,7	B	A	E	57	738	1x9
STONE EM	1135	SEM8	D002118P6C182717	B	98,5	B	A	F	60	807	1x9
STONE EM	1135	SEM10	D002118P6C182717	C	58,3	C	A	E	59	559	1x9
S-DD11 X	810	on-board	D011088P6C182219	B	59,6	B	F	E	68	681	2x3,9
S-DD11 EM X	810	SEM1	D011088P6C182219	B	55,4	B	F	E	59	633	2x3,9
S-DD11 EM X	810	SEM2	D011088P6C182219	C	80,2	C	F	E	62	639	2x3,9
S-DD11 EM X	810	SEM10	D011088P6C182219	C	57,9	C	F	E	70	478	2x3,9
S-DD11 EM X	810	SEM12	D011088P6C182219	C	79,7	C	F	E	71	576	2x3,9
S-DD13	880	on-board	D013088TC1283163	A	50,8	A	C	C	68	690	1x9,5
S-DD13 EM	880	SEM1	D013088TC1293163	A	48,7	A	C	C	59	660	1x9,5
S-DD13 EM	880	SEM2	D013088TC1153163	B	75,2	B	C	C	62	665	1x9,5
S-DD13 EM	880	SEM8	D013088TC1173163	C	109,4	C	C	C	64	775	1x9,5
S-DD13 EM	880	SEM10	D013088TC1303163	C	65,7	D	C	C	61	525	1x9,5
S-DD18	880	on-board	D018088TC1282472	A	50,7	A	A	E	67	730	1x5
S-DD18 EM	880	SEM1	D018088TC1292472	A	46,8	A	A	E	61	665	1x5
S-DD18 EM	880	SEM2	D018088TC1152472	C	81,6	C	A	E	63	682	1x5
S-DD18 EM	880	SEM8	D018088TC1172472	B	93,9	B	A	F	66	787	1x5
S-DD18 EM	880	SEM10	D018088TC1302472	B	51,7	C	A	E	65	575	1x5
S-DD18 EM	880	SEM12	D018088TC1312472	A	58,7	A	A	E	73	715	1x5
S-DD20 INOX BRHM	520	on-board	D020052TC135XX74	A++	31,5	A	n/a	C	66	680	n/a
S-DD20 GLASS BRHM	520	on-board	D020052TC135XX74	A++	31,5	A	n/a	C	66	680	n/a

CEILING

Product name	Dimension	Motor	Model Identifier	Energy efficiency Class	Annual Energy Consumption	Fluid Dynamic Efficiency	Light Efficiency Class	Energy-filtering Efficiency Class	Weighted Sound Power Indicator at maximum	Air Flow at maximum / boost setting	Lighting
SLT 918 TLB0	918x918	on-board	C97809RC1240070	B	34,9	C	B	F	63	680	2x1,75
SLT 918 TLB0 BRHM	918x918	on-board	C97809RC1276070	A++	26	A	B	B	71	730	2x1,75
SLT 918 LM	918x918	SEM1	C97809RC1296070	B	34,1	B	B	F	59	670	2x1,75
SLT 918 LM	918x918	SEM2	C97809RC1296070	B	69,6	A	B	F	59	790	2x1,75
SLT 919	919x1000	on-board	C972120RC1240077	B	34,7	C	B	F	63	680	3x2,5
SLT 919 BRHM	919x1000	on-board	C972120RC1276077	A++	26	A	B	B	71	730	3x2,5
SLT 919 LM	919x1000	SEM1	C972120RC1296077	B	34,8	A	B	F	61	685	3x2,5
SLT 919 LM	919x1000	SEM2	C972120RC1296077	C	69	C	B	F	61	685	3x2,5
SLT 911	555x280	on-board	C97100RC1244145	B	32,8	C	A	F	65	650	1x8
SLT 911 BRHM	555x280	on-board	C97100RC1314145	A++	34,9	A	A	B	71	730	1x8
SLT 911 LM	555x280	SEM1	C97100RC1294145	B	33,7	A	A	F	61	665	1x8
SLT 911 LM	555x280	SEM2	C97100RC1294145	C	82,9	C	A	F	65	685	1x8
SLT 911	650x1200	on-board	C971120RC1240077	B	33,7	C	B	F	64	670	2x1,75
SLT 911 BRHM	650x1200	on-board	C971120RC1314077	A++	26	A	B	B	71	730	2x1,75
SLT 911 LM	650x1200	SEM1	C971120RC1294077	B	34,8	A	B	F	61	675	2x1,75
SLT 911 LM	650x1200	SEM2	C971120RC1294077	C	84	C	B	F	65	705	2x1,75
SLT 915 4V APP		on-board	C97307RA1245335	B	33	B	E	F	62	540	1x10,5
SLT 915 BRHM APP		on-board	C97307RA1375335	A+	30,1	A	E	B	67	700	1x10,5
SLT 915 LM APP		SEM1	C97307RA1295335	A	31,7	A	E	F	69	652	1x10,5
SLT 915 LM APP		SEM2	C97307RA1255335	C	92,1	C	E	F	70	630	1x10,5
SLT 915 4V LIGHT APP		on-board	C97307RA1245335	B	33	B	E	F	62	540	1x10,5
SLT 915 BRHM LIGHT APP		on-board	C97307RA1375335	A+	30,1	A	E	B	67	700	1x10,5
SLT 915 LM LIGHT APP		SEM1	C97307RA1295335	A	31,7	A	E	F	69	652	1x10,5
SLT 915 LM LIGHT APP		SEM2	C97307RA1255335	C	92,1	C	E	F	70	630	1x10,5
SLT 914 4V APP	555x550	on-board	C97400RC1247775	B	43,3	B	A	F	65	393	1x7
SLT 914 BRHM APP	555x550	on-board	C97400RC1377775	A++	25,8	A	A	B	71	730	1x7
SLT 914 LM APP	555x550	SEM1	C97400RC1297775	A	48,7	A	A	F	61	466	1x7
SLT 914 LM APP	555x550	SEM2	C97400RC1297775	B	75,8	B	A	F	60	469	1x7
SLT 916 E.L.A. 4V APP	918x918	on-board	C97609RA1266081	B	31,9	B	A	E	66	580	2x1,4
SLT 916 E.L.A. BRHM APP	918x918	on-board	C97609RA1376081	A++	29,1	A	A	B	66	716	2x1,4
SLT 916 E.L.A. LM APP	918x918	SEM1	C97609RA1296081	A	47,8	A	A	E	68	685	2x1,4
SLT 916 E.L.A. LM APP	918x918	SEM2	C97609RA1266081	B	78,8	C	A	E	70	700	2x1,4
SLT 916 E.L.A. 4V Auto	918x918	on-board	C97609RA1266081	B	31,9	B	A	E	66	580	2x1,4
SLT 916 E.L.A. BRHM Auto	918x918	on-board	C97609RA1376081	A++	29,1	A	A	B	66	716	2x1,4
SLT 916 E.L.A. LM Auto	918x918	SEM1	C97609RA1296081	A	47,8	A	A	E	68	685	2x1,4
SLT 916 E.L.A. LM Auto	918x918	SEM2	C97609RA1266081	B	78,8	C	A	E	70	700	2x1,4
SLT 917 4V APP	918x918	on-board	C97709RA1245081	B	31,8	B	A	E	66	580	1x3
SLT 917 BRHM APP	918x918	on-board	C97709RA1376081	A++	29,1	A	A	B	66	716	1x3
SLT 917 LM APP	918x918	SEM1	C97709RA1296081	A	47,8	A	A	E	68	685	1x3
SLT 917 LM APP	918x918	SEM2	C97709RA1266081	B	78,8	C	A	E	70	700	1x3
SLT 918 4V APP	918x918	on-board	C97809RA1245081	B	31,9	B	B	E	66	580	1x10,5
SLT 918 BRHM APP	918x918	on-board	C97809RA1376081	A+	34,6	A	B	B	66	735	1x10,5
SLT 918 LM APP	918x918	SEM1	C97809RA1296081	A	53,9	A	D	E	68	685	1x10,5
SLT 918 LM APP	918x918	SEM2	C97809RA1255081	C	84,8	C	D	E	70	700	1x10,5
SLT 919 E.L.A. 4V APP	680x1080	on-board	C979108RA1244860	B	52,6	B	B	E	63	600	2x5
SLT 919 E.L.A. BRHM APP	680x1080	on-board	C979108RA1374860	A+	35,5	A	B	B	71	735	2x5
SLT 919 E.L.A. EM APP	680x1080	SEM1	C979108RA1294860	A	56,2	A	B	E	65	695	2x5
SLT 919 E.L.A. EM APP	680x1080	SEM2	C979108RA1154860	B	79,6	B	B	E	71	754	2x5
SLT 980 E.L.A. BRHM	520x900	on-board	C98009RC1375181	A+	34,8	A	D	B	66	745	1x10,5
SLT 980 E.L.A. EM	520x900	SEM1	C98009RC1295181	A	53,3	A	D	E	68	685	1x10,5
SLT 980 E.L.A. EM	520x900	SEM2	C98009RC1155181	C	84,8	C	D	E	70	700	1x10,5

DECORATIVE ISLANDS				Energy efficiency Class	Annual Energy Consumption	Fluid Dynamic Efficiency	Light Efficiency Class	Grease Filtering Efficiency Class	Weighted Sound Power Emission at maximum speed	Air Flow at intensive / boost setting	Lighting
Product name	Dimension	Motor	Model Identifier	EEC	AEChood	FDE	LE	GFE	dB(A)	Qmax	W
SIL24 X	900	on-board	I024090PB1284437	A	45,3	A	B	A	70	730	2x3,75
SIL24 X	1200	on-board	I024120PB1284437	A	45,3	A	B	A	70	730	2x3,75
SIL24 TC	900	on-board	I024090TC1284437	A	45,3	A	B	A	70	730	2x3,75
SILTC36	1200	on-board	I036120TA1284143	A	48,2	A	B	A	71	700	2x6
MO407		on-board	I407037RC1283685	A	48,3	A	A	A	71	650	2x2,5
MO408		on-board	I408040RC1283685	A	48,3	A	A	A	71	650	2x2,5
MO409W		on-board	I409090TA1104443	A	48,3	A	A	C	67	640	2x3,75
MO409W		on-board	I409090TB1104443	A	51,1	A	A	A	67	640	3x3,75

WALL HOODS				Energy efficiency Class	Annual Energy Consumption	Fluid Dynamic Efficiency	Light Efficiency Class	Grease Filtering Efficiency Class	Weighted Sound Power Emission at maximum speed	Air Flow at intensive / boost setting	Lighting
Product name	Dimension (mm)	Motor	Model Identifier	EEC	AEChood	FDE	LE	GFE	dB(A)	Qmax	W
SUTC 90	900	on-board	P080200UL1120111	A	44,0	A	B	C	69	750	2x3,5
SUC 91	900	on-board	P081300SL1120111	A	47,1	A	B	D	69	750	2x3,5
SUC 92	900	on-board	P090300TC1134437	A	45,3	A	B	A	71	730	2x3,75
S 91	900	on-board	P090400PB1134437	A	45,3	A	B	A	71	730	2x3,75
S 92	900	on-board	P090300PB1134437	A	45,3	A	B	A	71	730	2x3,75
SUC 88	900	on-board	P080300TC1134437	A	44,1	A	A	C	69	750	2x3,5
SUC 89	900	on-board	P080300TC1134437	A	45,1	A	A	C	69	750	2x3,5
SUTC 97	900	on-board	P080300TC1134437	A	43,8	A	A	A	69	720	2x3,5
SUTC 97	900	on-board	P090300TC1134437	A	47,5	A	B	A	71	710	2x3,75
S 107	900	on-board	P100300PB1134437	A	39,5	A	B	A	67	700	2x3,75
SUC 107	900	on-board	P100300TC1134437	A	39,5	A	B	A	67	700	2x3,75
S 109	900	on-board	P100300PB1134437	A	32,2	A	A	A	66	700	2x3,75
S 109	1100	2 Mot on-board	P100720PB1134437	B	115,6	B	A	A	75	1410	2x3,75
SUC 111	900	on-board	P110300TC1134437	A	48,0	A	A	C	64	630	2x3,75
SUTC 111 anti-drop	900	on-board	P110300TC1134437	A	48,0	A	A	C	64	630	2x3,75
SUC 116	900	on-board	P110300PB1134437	A	48,0	A	B	C	66	630	2x3,75
SUC 119	900	on-board	P110300TC1134437	A	45,1	A	A	C	69	750	2x3,75
SUC 120	900	on-board	P110300TC1134437	A	48,8	A	A	C	66	700	2x3,75
SUC 121	900	on-board	P110300TC1134437	A	38,7	A	A	C	67	700	2x3,75
SUC 121	900	on-board	P110300TC1134437	A	41,4	A	A	C	67	700	2x3,75
MO209		on-board	P200300PB1134437	A	48,3	A	A	A	71	650	2x2,5
MO210		on-board	P210300PB1134437	A	48,3	A	A	A	71	650	2x2,5

BUILT-IN PRODUCTS				Energy efficiency Class	Annual Energy Consumption	Fluid Dynamic Efficiency	Light Efficiency Class	Grease Filtering Efficiency Class	Weighted Sound Power Emission at maximum speed	Air Flow at intensive / boost setting	Lighting
Product name	Dimension	Motor	Model Identifier	EEC	AEChood	FDE	LE	GFE	dB(A)	Qmax	W
SM 900	520	on-board	G900052PB1010657	B	58,1	B	A	B	70	604	2x2,1
SM 900	700	on-board	G900070PB1010657	B	54,9	B	A	B	70	654	2x2,1
SL 900	520	on-board	G900052PB1280657	A	46,6	A	A	B	70	762	2x2,1
SL 900	700	on-board	G900070PB1280657	A	46,9	A	A	B	70	773	2x2,1
SL 903-P	700	on-board	G903070PB1280541	A	55,2	A	A	B	69	700	4x2,1
SL 903-P-EM	700	SEM1	G903070PB1290541	B	58,1	B	A	B	65	630	4x2,1
SL 903-P-EM	700	SEM2	G903070PB1150541	C	80,2	C	A	B	66	630	4x2,1
SL 903-P	900	on-board	G903090PB1280541	A	50,9	A	A	B	69	705	4x2,1
SL 903-P-EM	900	SEM1	G903090PB1290541	B	58,5	B	A	B	65	624	4x2,1
SL 903-P-EM	900	SEM2	G903090PB1150541	C	81,1	C	A	B	66	632	4x2,1
SL 906	520	on-board	G906052PB1284052	A	44,5	A	A	A	71	680	1x3,75
SL 906	850	on-board	G906085PB1284153	A	45,7	A	A	A	71	743	1x6
SL906	1000	on-board	G906100PB1282749	A	46,8	A	A	A	71	743	2x3,75
SL 907	520	on-board	G907052PB1285559	A	46,5	A	B	B	69	682	1x4
SL 907	700	on-board	G907070PB1285646	A	54,0	A	B	B	69	715	1x11
SL 909	856	on-board	G909086PB1284148	A	44,6	A	A	A	71	757	1x6
SL 909	1400	on-board	G909140PB1284048	A+	43,0	A	A	A	71	768	2x3,75
SL 913	520	on-board	G913052PB1284427	A	56,8	A	A	B	69	668	1x3,75
SL 913	780	on-board	G913078PB1284527	A	48,9	A	A	B	69	721	1x6
SLTC 919	520	on-board	G919T52TC1284466	A	45,8	A	A	A	71	715	1x3,75
SLTC 919	850	on-board	G919T85TC1284567	A	48,5	A	B	A	71	730	1x6
SM 923 -L	520	on-board	G923052PB1013580	A	49,4	A	A	B	70	610	1x6,5
SM 923 -L	850	on-board	G923085PB1013382	A	52,8	A	A	B	70	640	1x10,5
SM 927	520	on-board	G927052PB1013527	B	50,5	B	A	B	70	590	1x6,5
SM 927	850	on-board	G927085PB1013378	B	53,9	B	B	B	70	619	1x10,5
SL 927 anti-drop	520	on-board	G927052PB1014427	B	48,5	B	A	B	70	590	1x3,75
SL 927 anti-drop	850	on-board	G927085PB1014578	A	50,7	A	A	B	70	653	1x6
SLTC 928	600	on-board	G928060TC1014066	A	44,0	A	A	B	70	580	1x3,75
SLTC 928	900	on-board	G928090TC1014084	A	40,4	A	A	B	70	660	1x6
SLTC 928	1200	on-board	G928120TC1014166	A	42,0	A	A	B	70	660	2x3,75
SLTC 930	850	on-board	G930085RA1284087	A	43,6	A	A	B	69	695	2x3,75

VENTED INDUCTION HOBS				Energy efficiency class	Annual Energy Consumption	Fluid Dynamic efficiency	Light Efficiency class	Grease Filtration Efficiency class	Noise (Sound Power Emission at maximum speed)	Air Flow at reference / local setting	Lighting
Product name	Dimension	Motor	Model Identifier	EEC	AEchood	FDE	LE	GFE	dB(A)	Qmax	W
S-DCH1	900x510	on-board	00090887C1202420	A	44,5	A	A	E	68	717	105
S-DCH1	900x510	30 M1	00090887C1202420	B	54,5	A	A	E	58	662	105
S-DCH1	900x510	30 M2	00090887C1152420	C	82,9	C	A	E	62	702	105
S-DCH1	900x510	30 M8	00090887C1172420	C	92,6	B	A	F	64	702	105
S-DCH1	900x510	SEV20	00090887C1302420	C	54,3	C	A	E	61	530	105
S-DCH1	900x510	SEV12	00090887C1312420	A	59	A	A	E	68	658	105
S-DCH6 BHW	900x520	on-board	00090807C1350000	A+	43,5	A	n/a	C	63	645	n/a
S-DCH6 BHW	785x520	on-board	00090807C1350070	A+	43,5	A	n/a	C	63	645	n/a
S-DCH6	900x520	on-board	00090807C1410000	B	43,9	B	n/a	C	63	540	n/a
S-DCH6	900x520	on-board	00090807C1410000	A++	32	A	n/a	C	68	360	n/a

art direction
Giacomo Fava

The printing process do not always permit
a faithful reproduction of tones
and materials of originals.

Sirius S.p.A. reserves the right to change,
at any time and without prior warning,
the technical specifications of any product
illustrated in this catalogue.

This catalogue is of exclusive propriety
of Sirius spa. All rights are reserved.
Any form of total or partial reproduction
of catalogue is strictly forbidden.

Security and respect of the general requirements
of Directives are the basis for the realization
of our products. It is a question of quality
and security, well spread in our company.
Together with the protection of environment,
and the health of our employees. Working
with us with passion, being respectful and
taking care of our company is like living at home.

SIRIUS S.p.a.
Zona Ind.le Berbentina 6/A
60041 Sassoferrato (An)
Tel. +39 0732.97171
Fax. +39 0732.95493

www.siriuscappe.com



APRIL 2024